Series 6, Gas hob, 75 cm, Tempered glass, Black
PPQ7A6B90

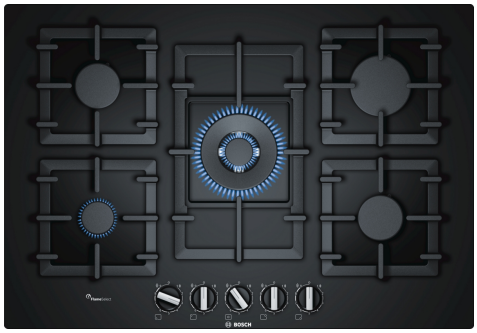

The tempered-glass gas hob with FlameSelect: achieve perfect cooking results thanks to nine precisely defined power levels.

Appliance type:	gas hob w integrated controls
Built-in / Free-standing:	Built-in
Heating type:	Gas
Number of cooking zones:	5
Type of control setting devices:	sword knobs
Required niche size for installation (HxWxD):	45 x 560-562 x 480-492 mm
Width of the appliance:	752 mm
Dimensions:	58x752x520 mm
Dimensions of the packed product (HxWxD):	145 x 793 x 597 mm
Net weight:	19.0 kg
Gross weight:	20.5 kg
Residual heat indicator:	without
Location of control panel:	Front
Basic surface material:	Tempered glass
Color of surface:	Black
Color of frame:	Black
Length electrical supply cord:	100.0 cm
EAN code:	4242002914985
Gas connection rating:	11500 W
Fuse protection:	3 A
Voltage:	220-240 V
Frequency:	60; 50 Hz

HEZ211310	Simmer cap
HEZ298105	Simmer plate
HEZ298114	Small pot support
HEZ298127	Wok ring

4 242002 914985

Series 6, Gas hob, 75 cm, Tempered glass, Black
PPQ7A6B90

The tempered-glass gas hob with FlameSelect: achieve perfect cooking results thanks to nine precisely defined power levels.

Design

- Tempered glass surface, Black
- frameless design: install the hob either flush or slightly raised on the worktop
- Cast iron pan supports with rubber feet

Usage convenience

- FlameSelect: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.

Burners and power

- 5 gas burners:
- Left front: economy burner up to 1 kW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Center front: wok burner up to 4 KW (depending on gas type)
- Right rear: high-speed burner up to 3 KW (depending on gas type)
- Right front: standard burner up to 1.75 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Pre-set for natural gas
- Nozzle set for LPG jets included. Connection to 28-30/37 mbar bottled gas. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 58 x 752 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 11.5 KW
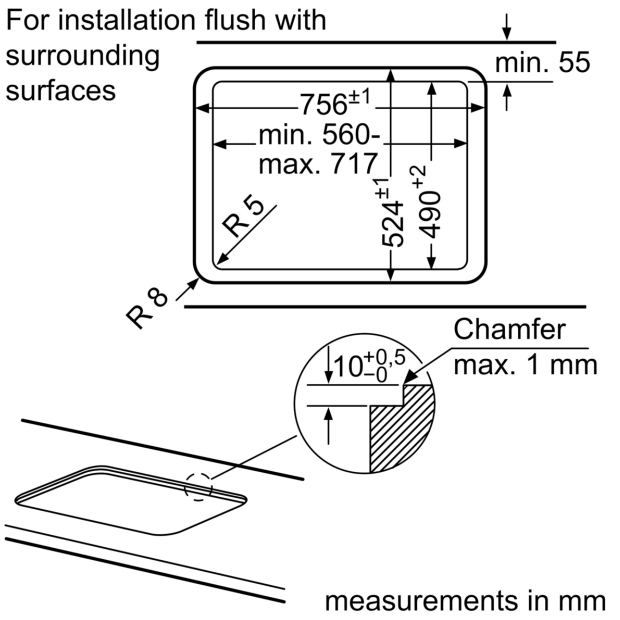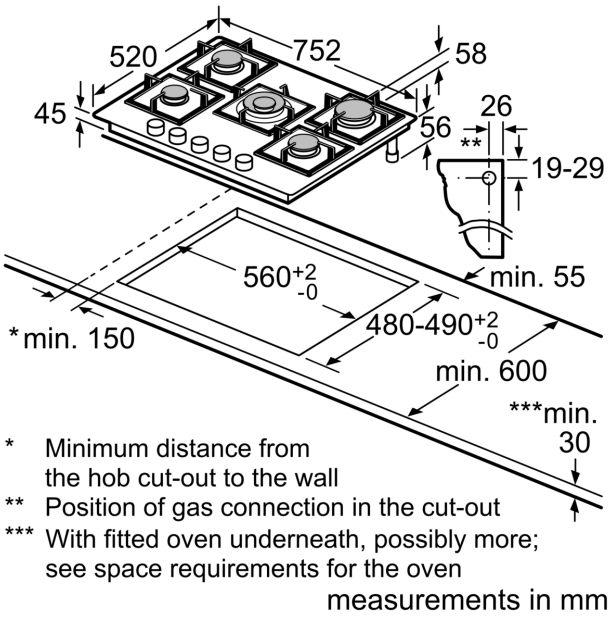
Series 6, Gas hob, 75 cm, Tempered glass, Black
PPQ7A6B90