


measurements in mm

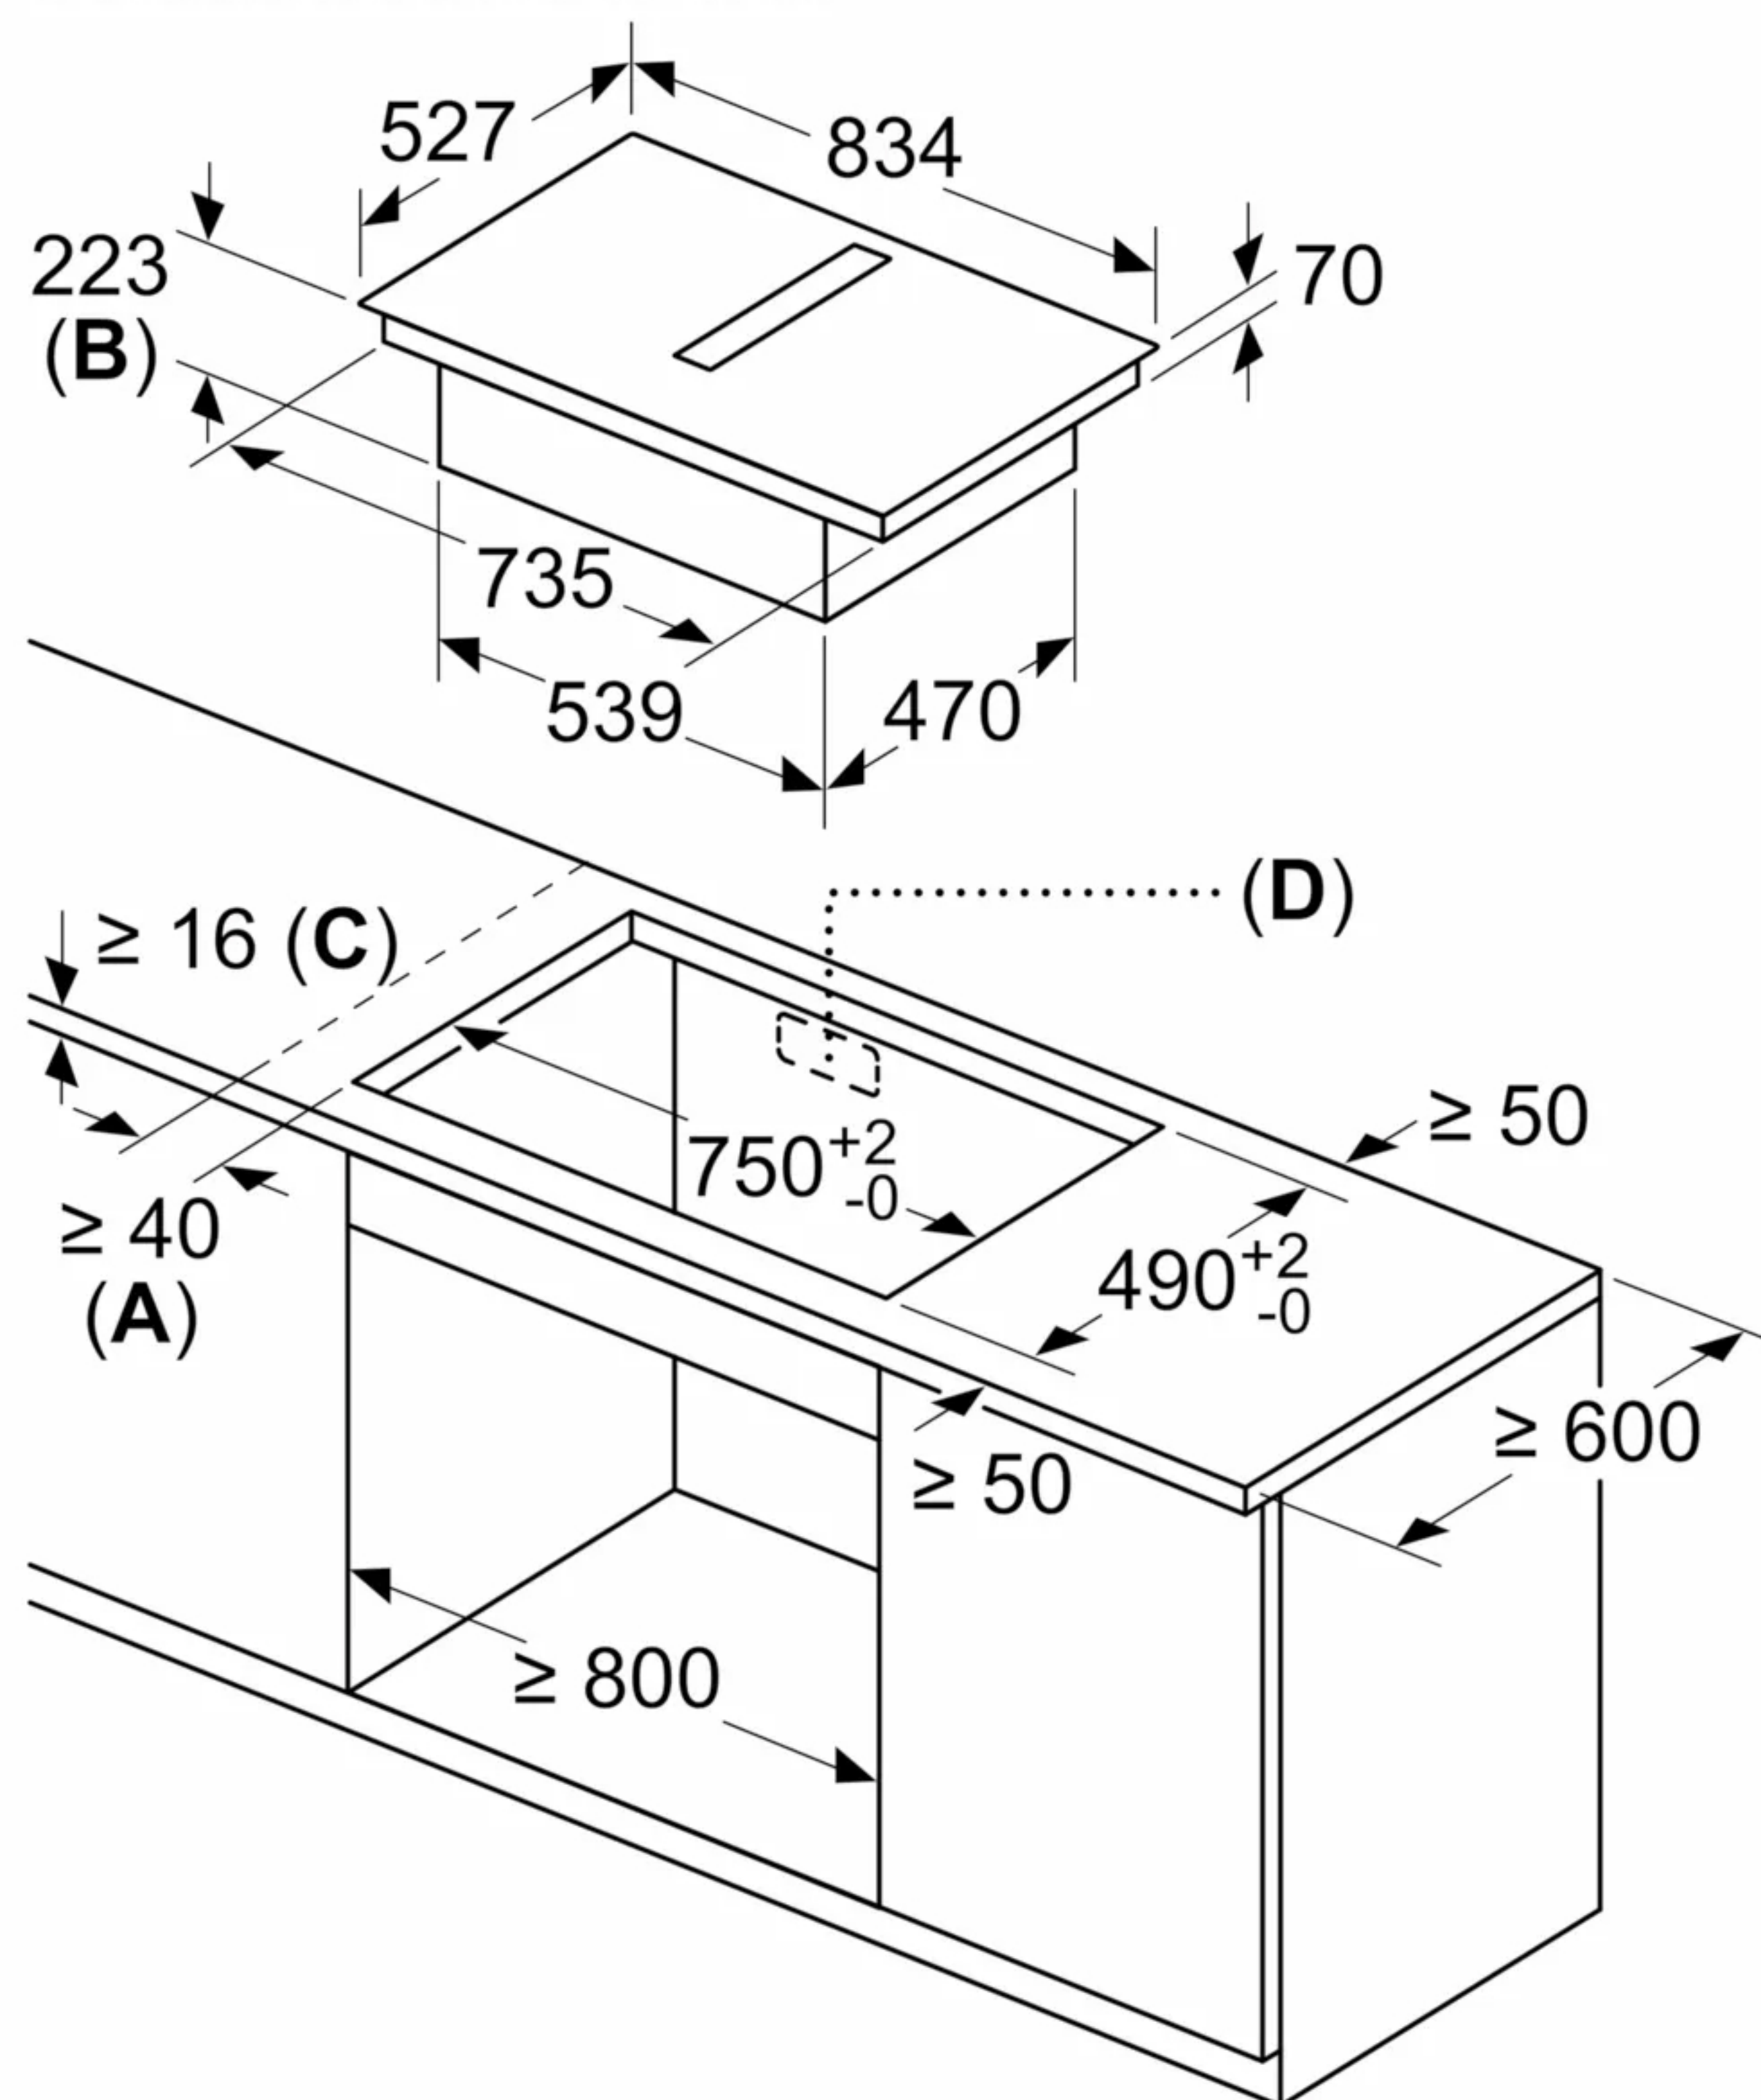


A: Minimum distance from the hob cut-out to the wall

B: Recessing depth

C: The worktop into which the hob is installed must withstand loads of approx. 60kg; suitable substructures must be used if required.


D: Cut-out in back panel required for pipework. Exact size and position can be taken from specific drawing.

Measurements in mm


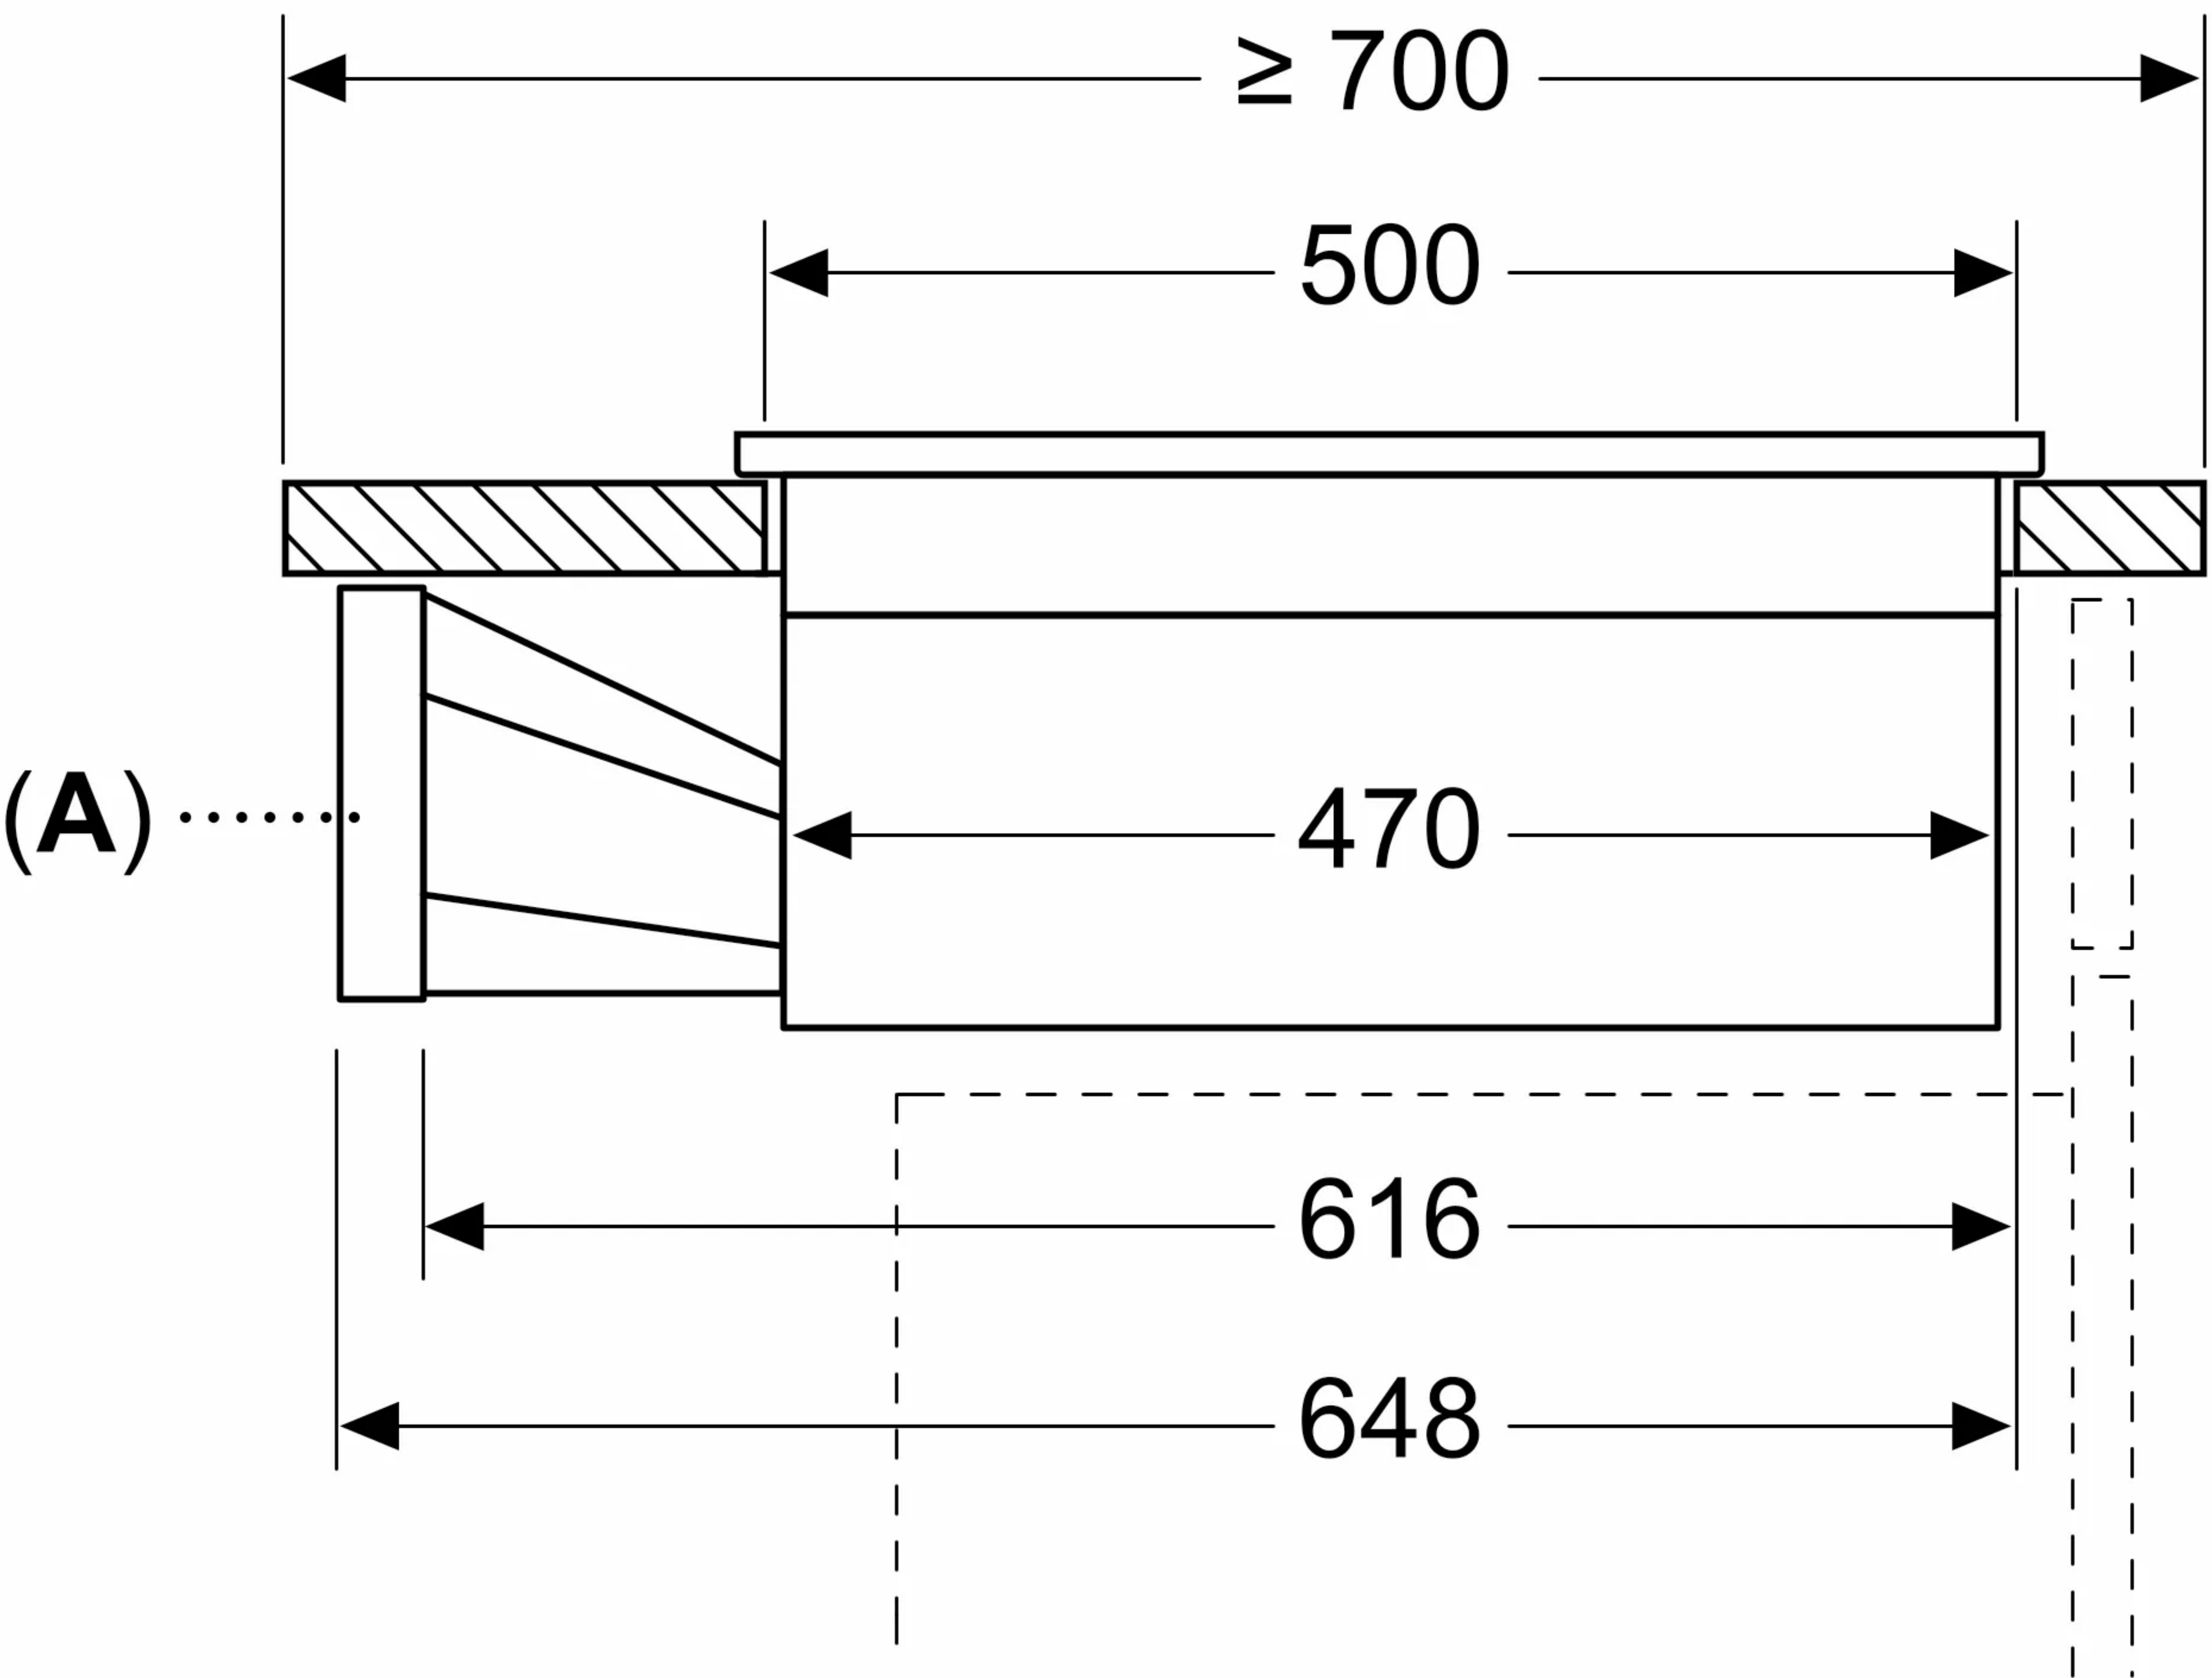


A: Adapter round-flat


measurements in mm
Front view

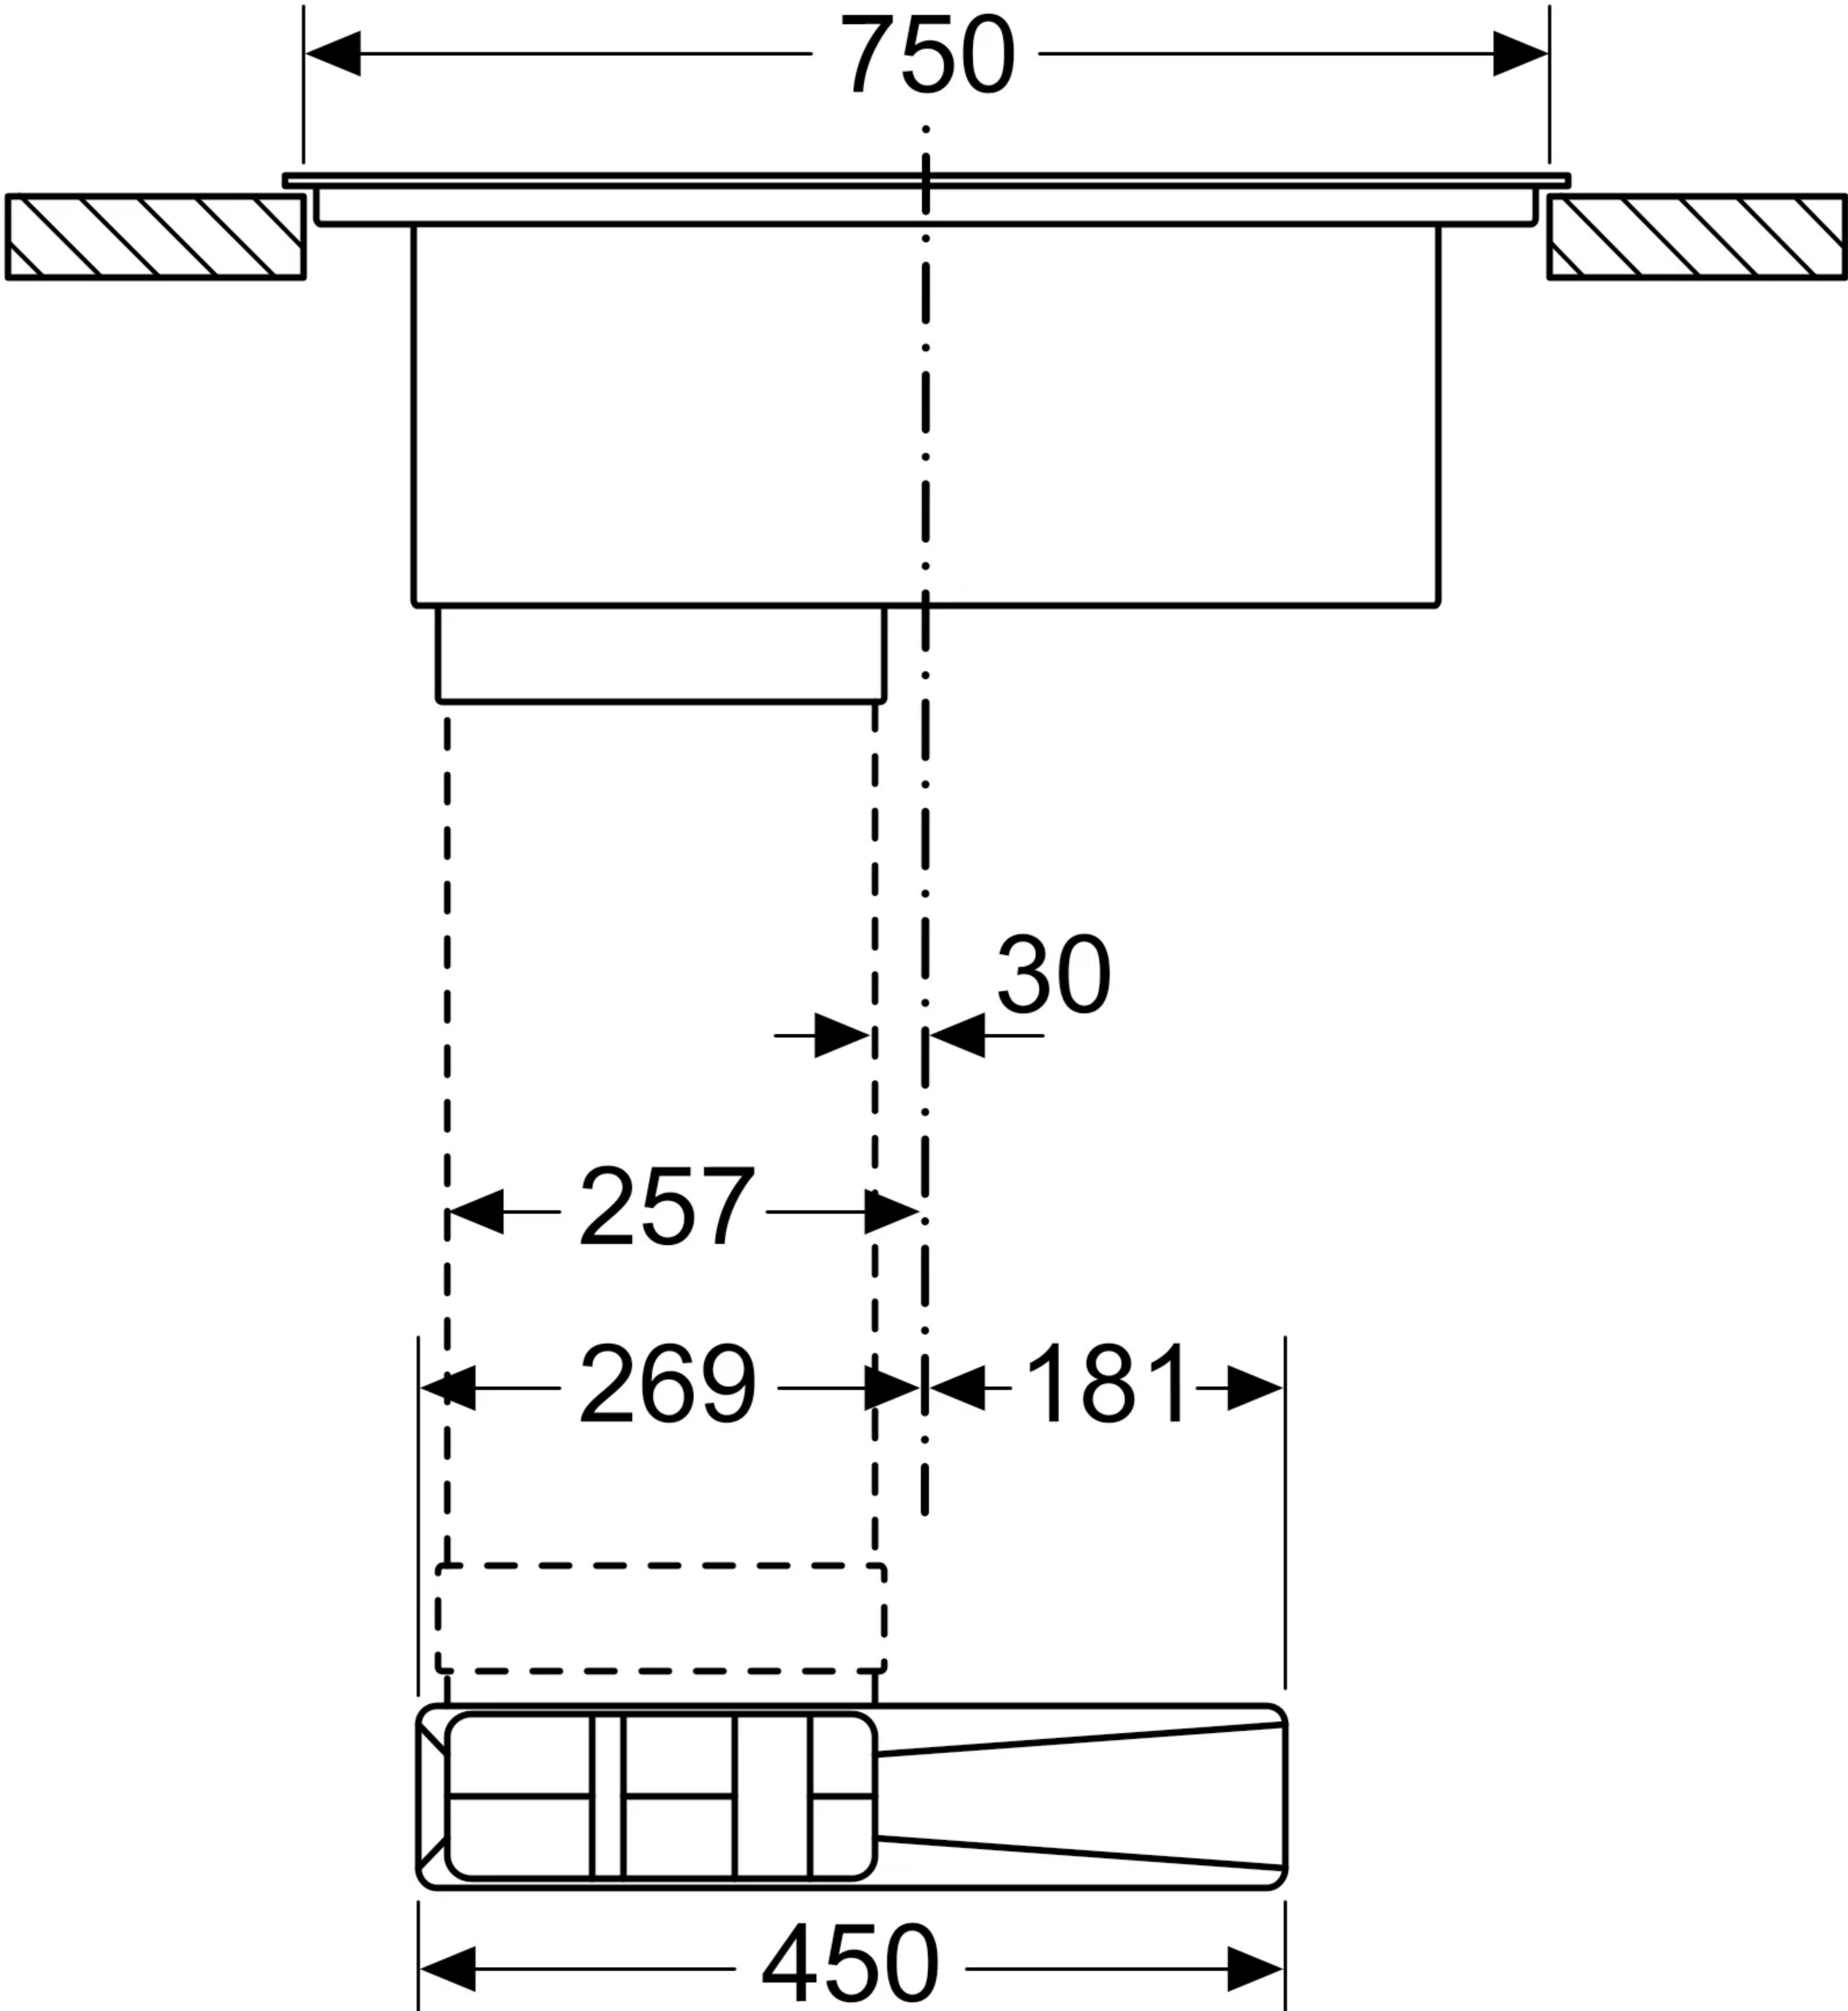

measurements in mm

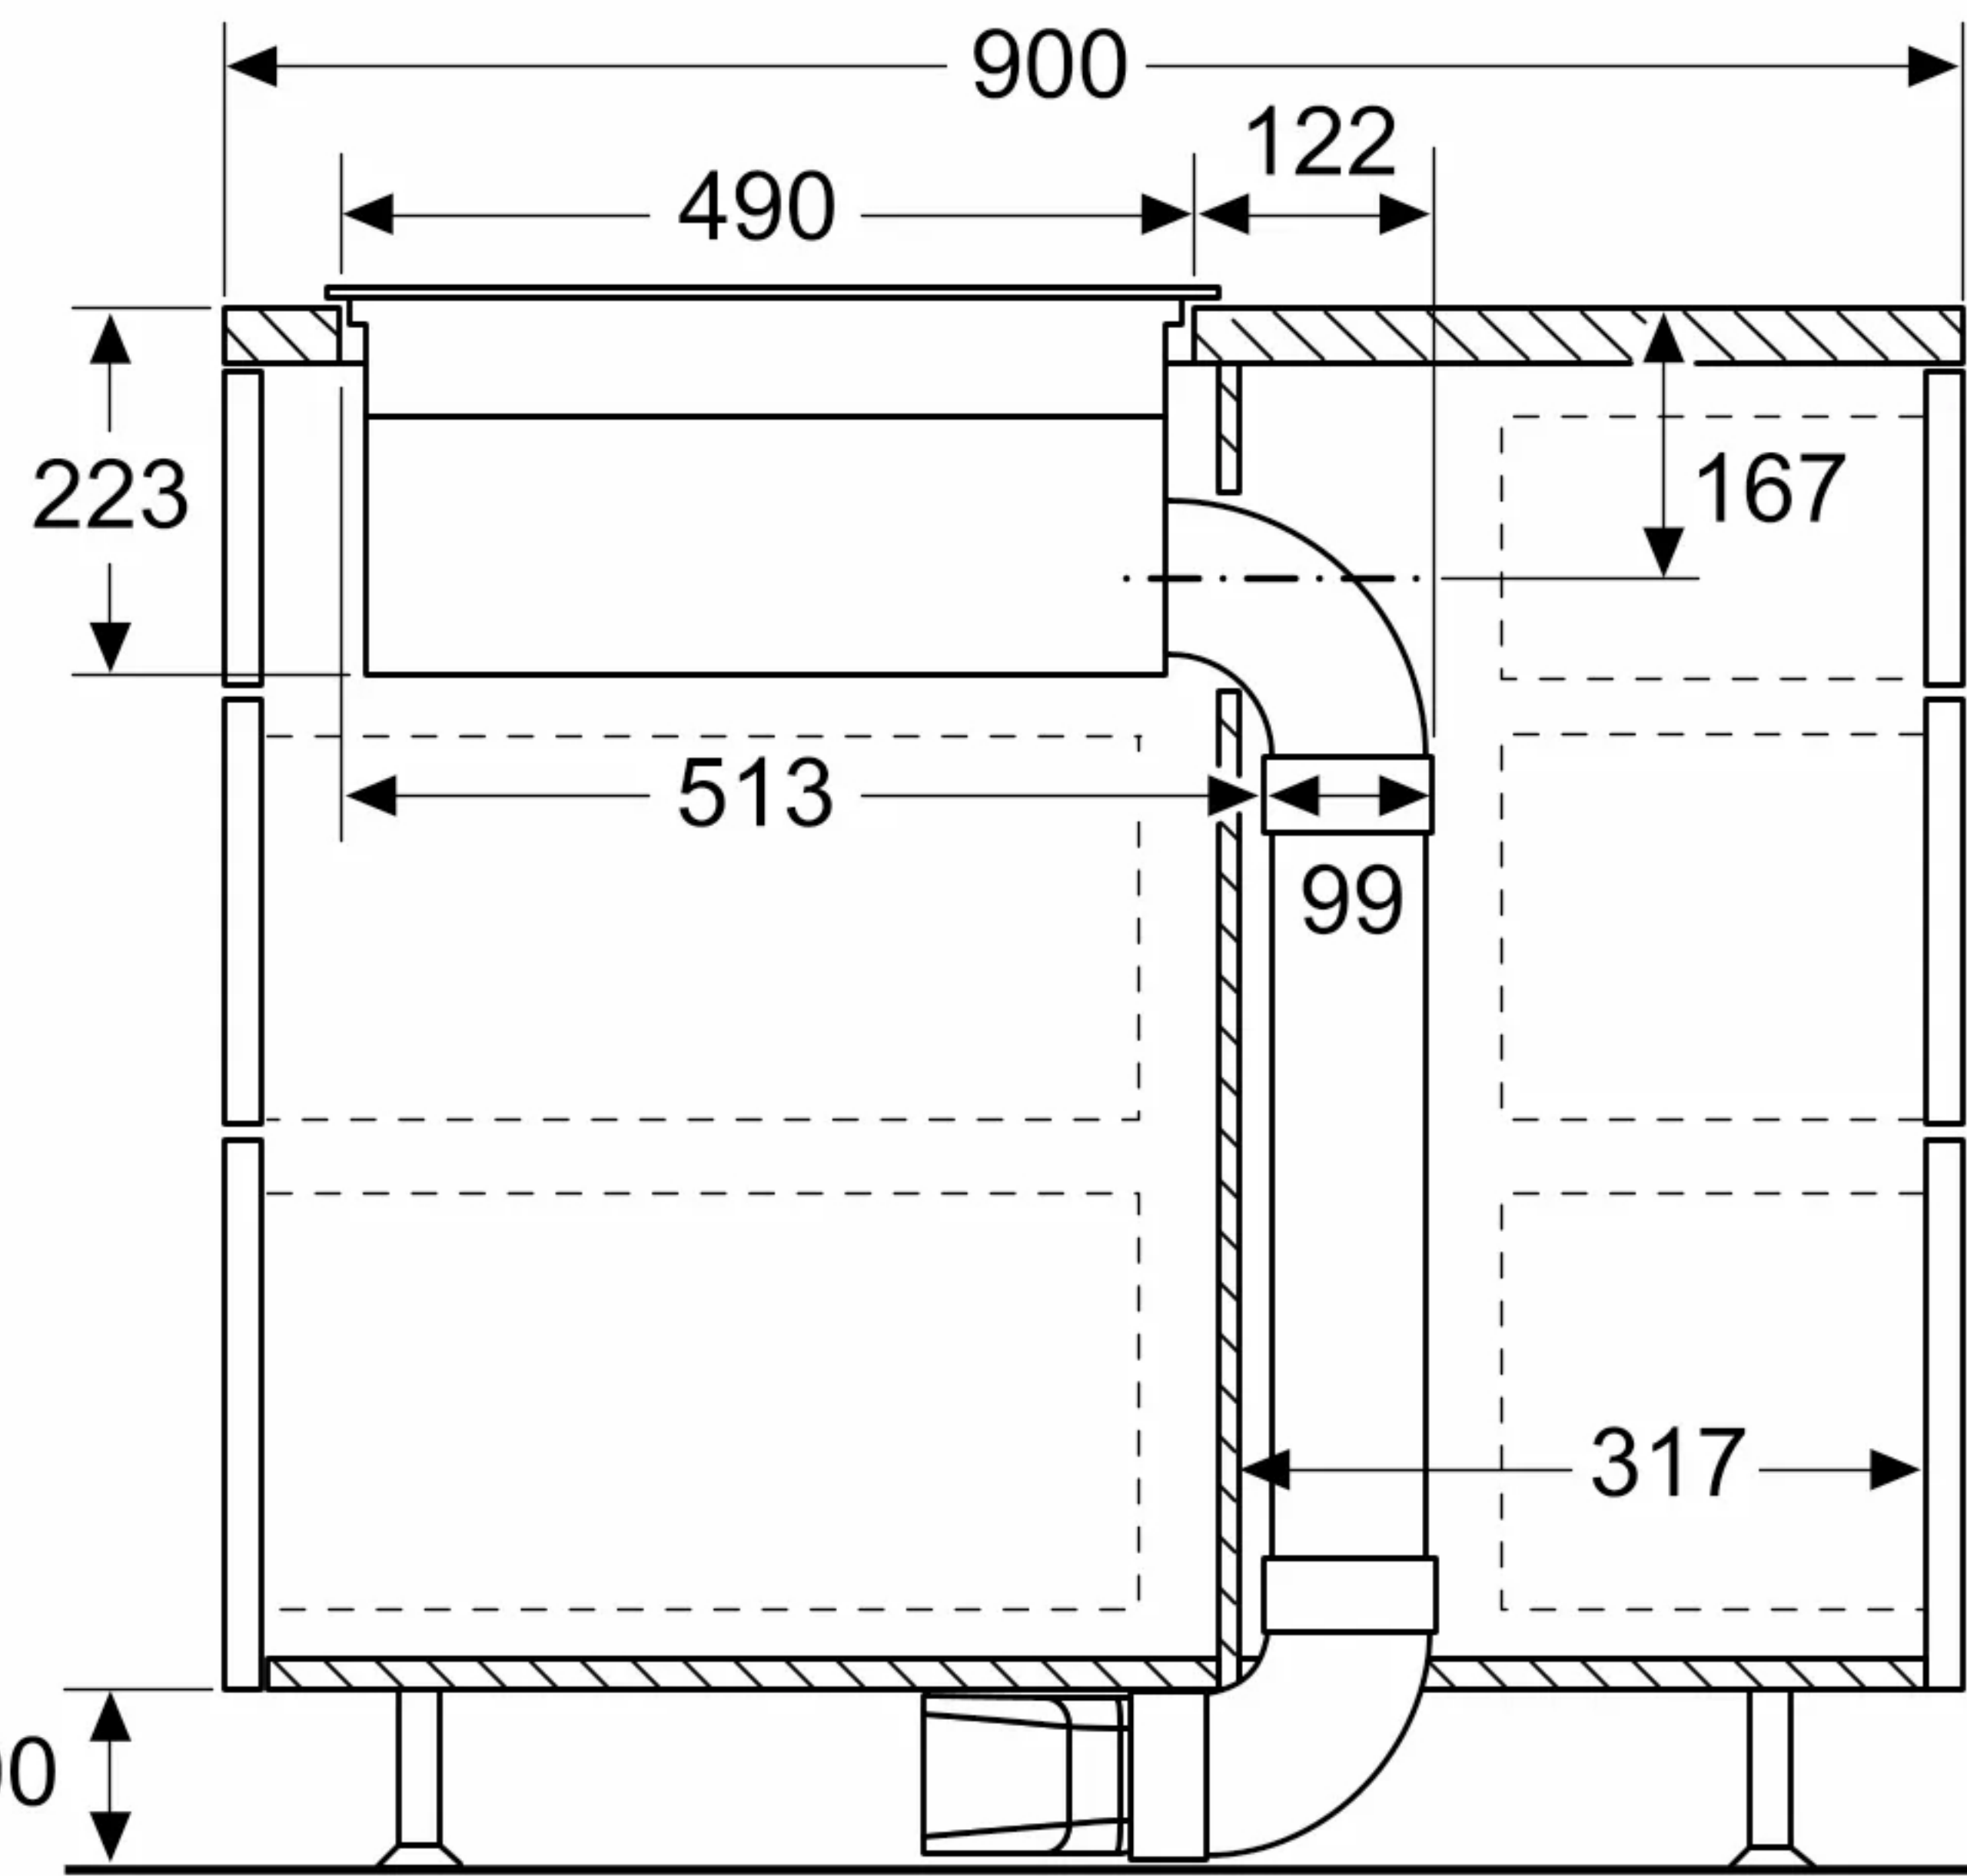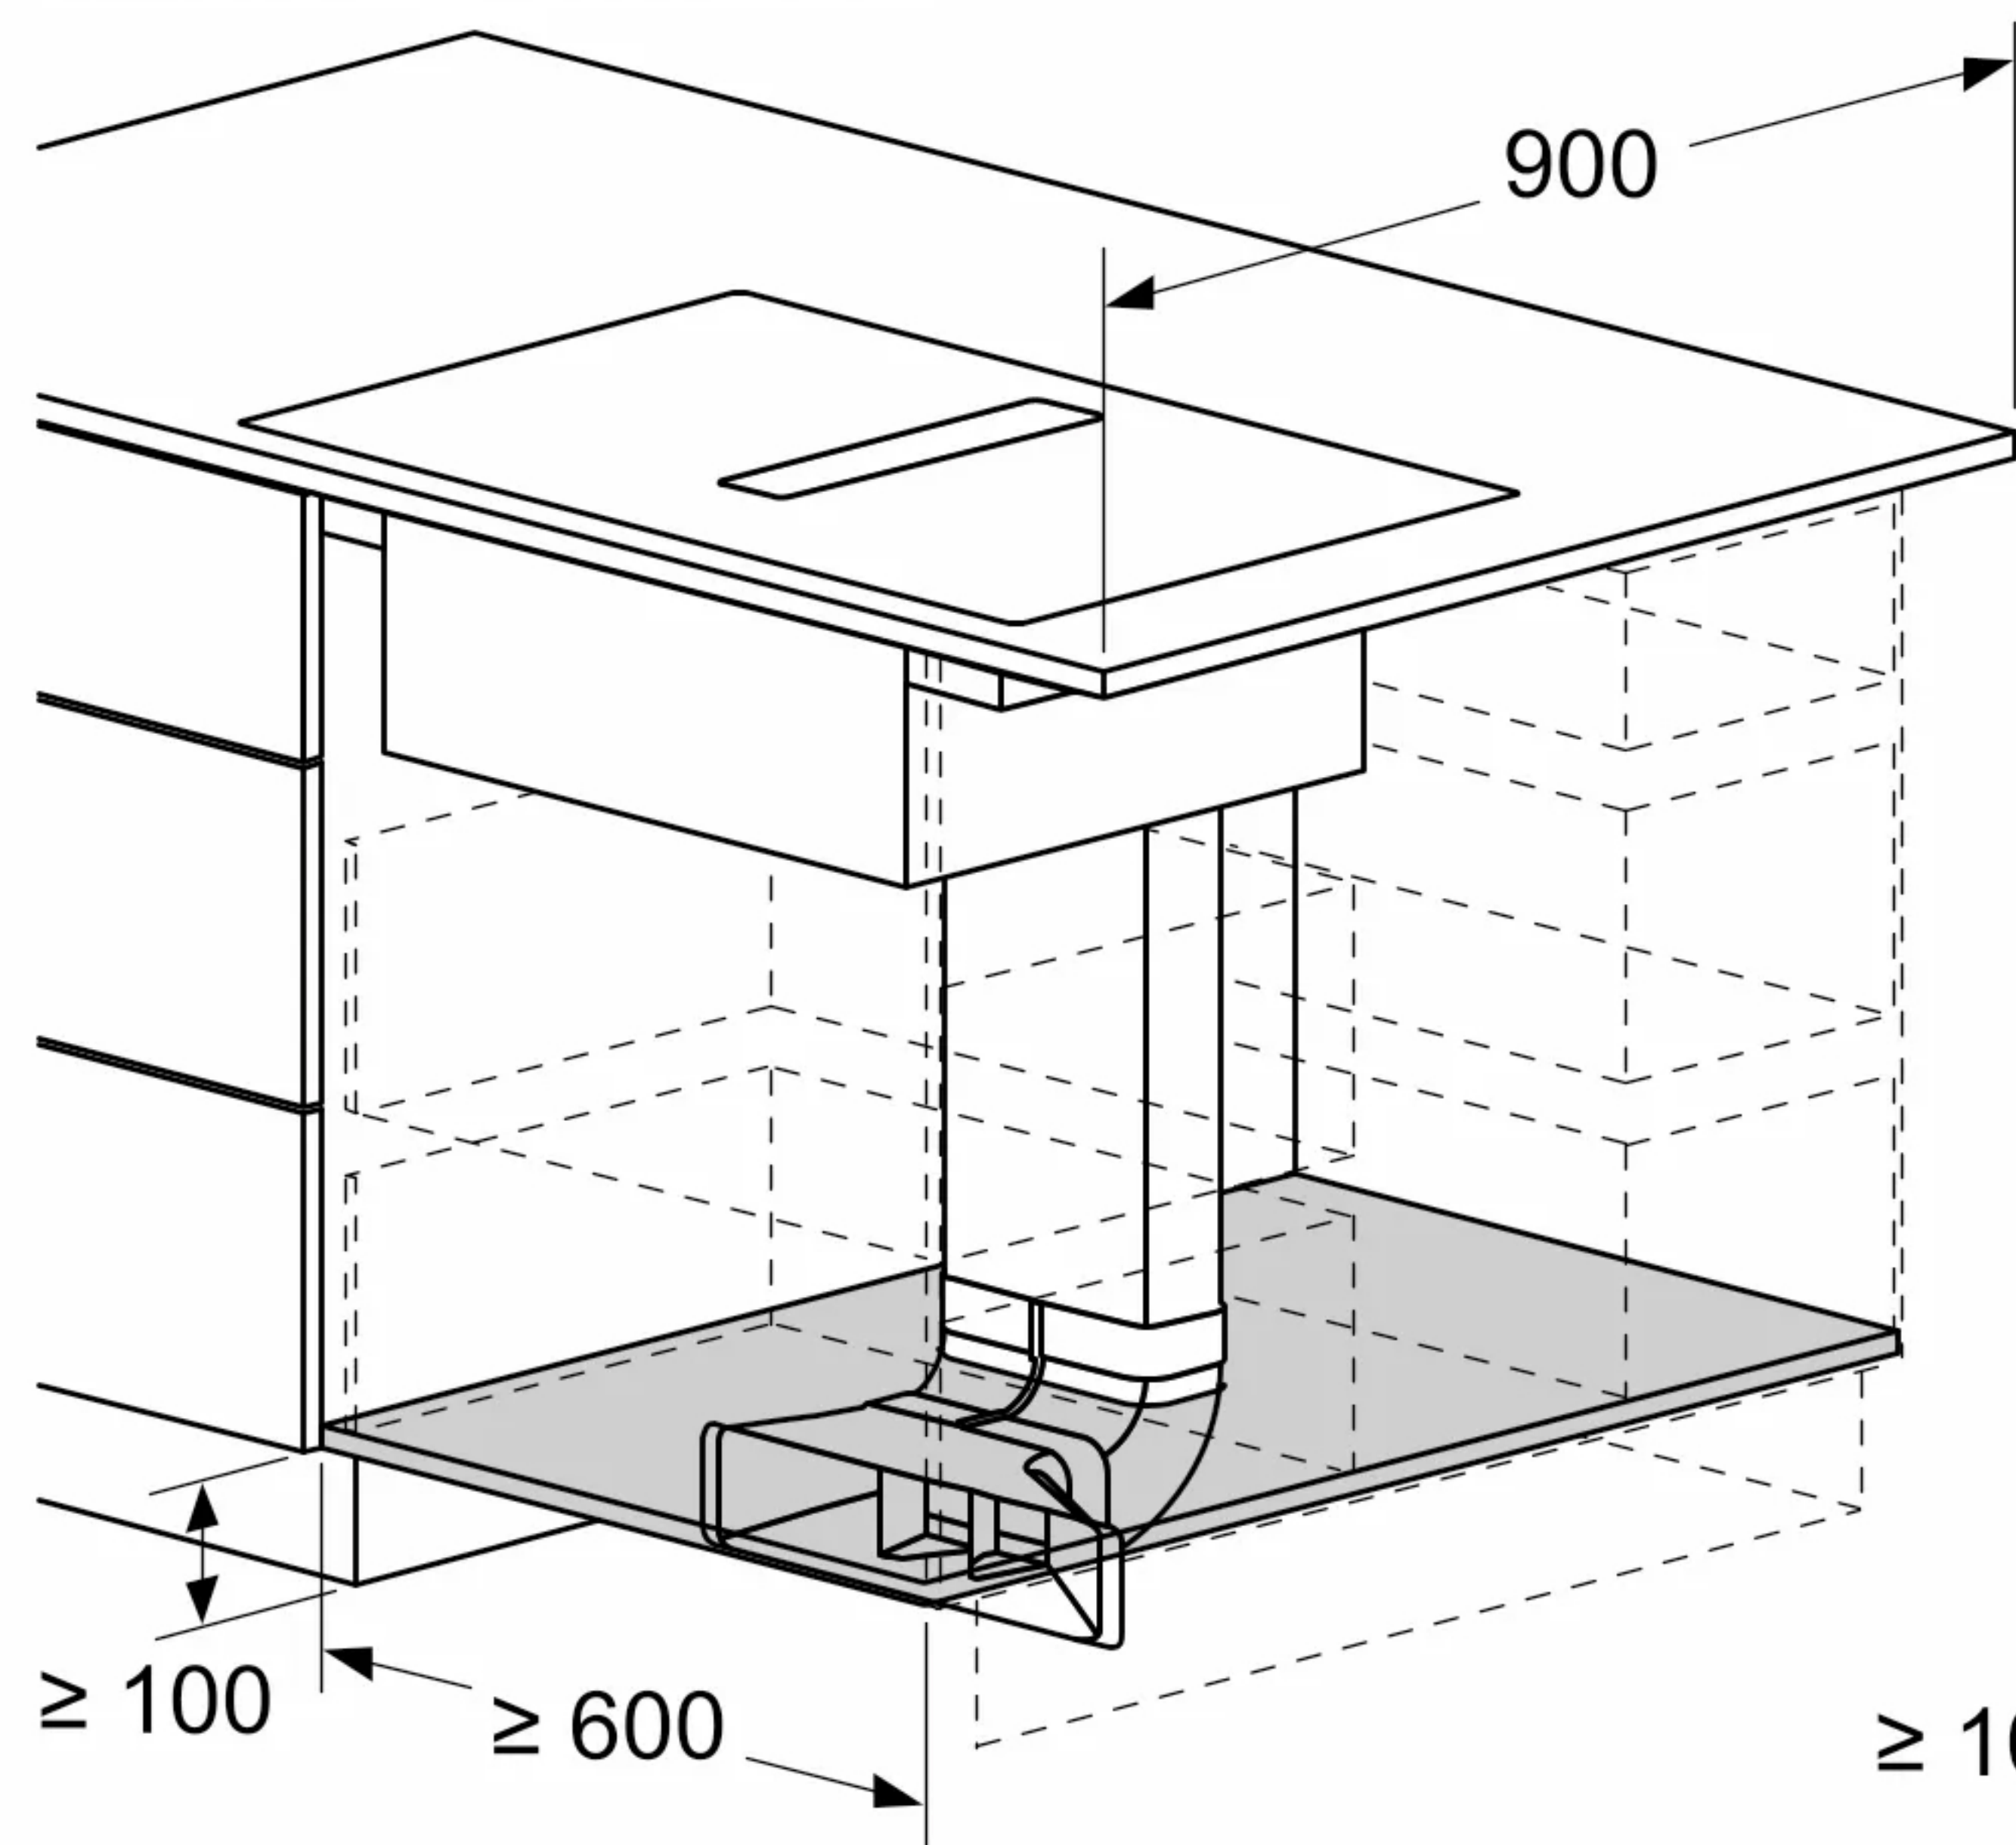

Measurements in mm

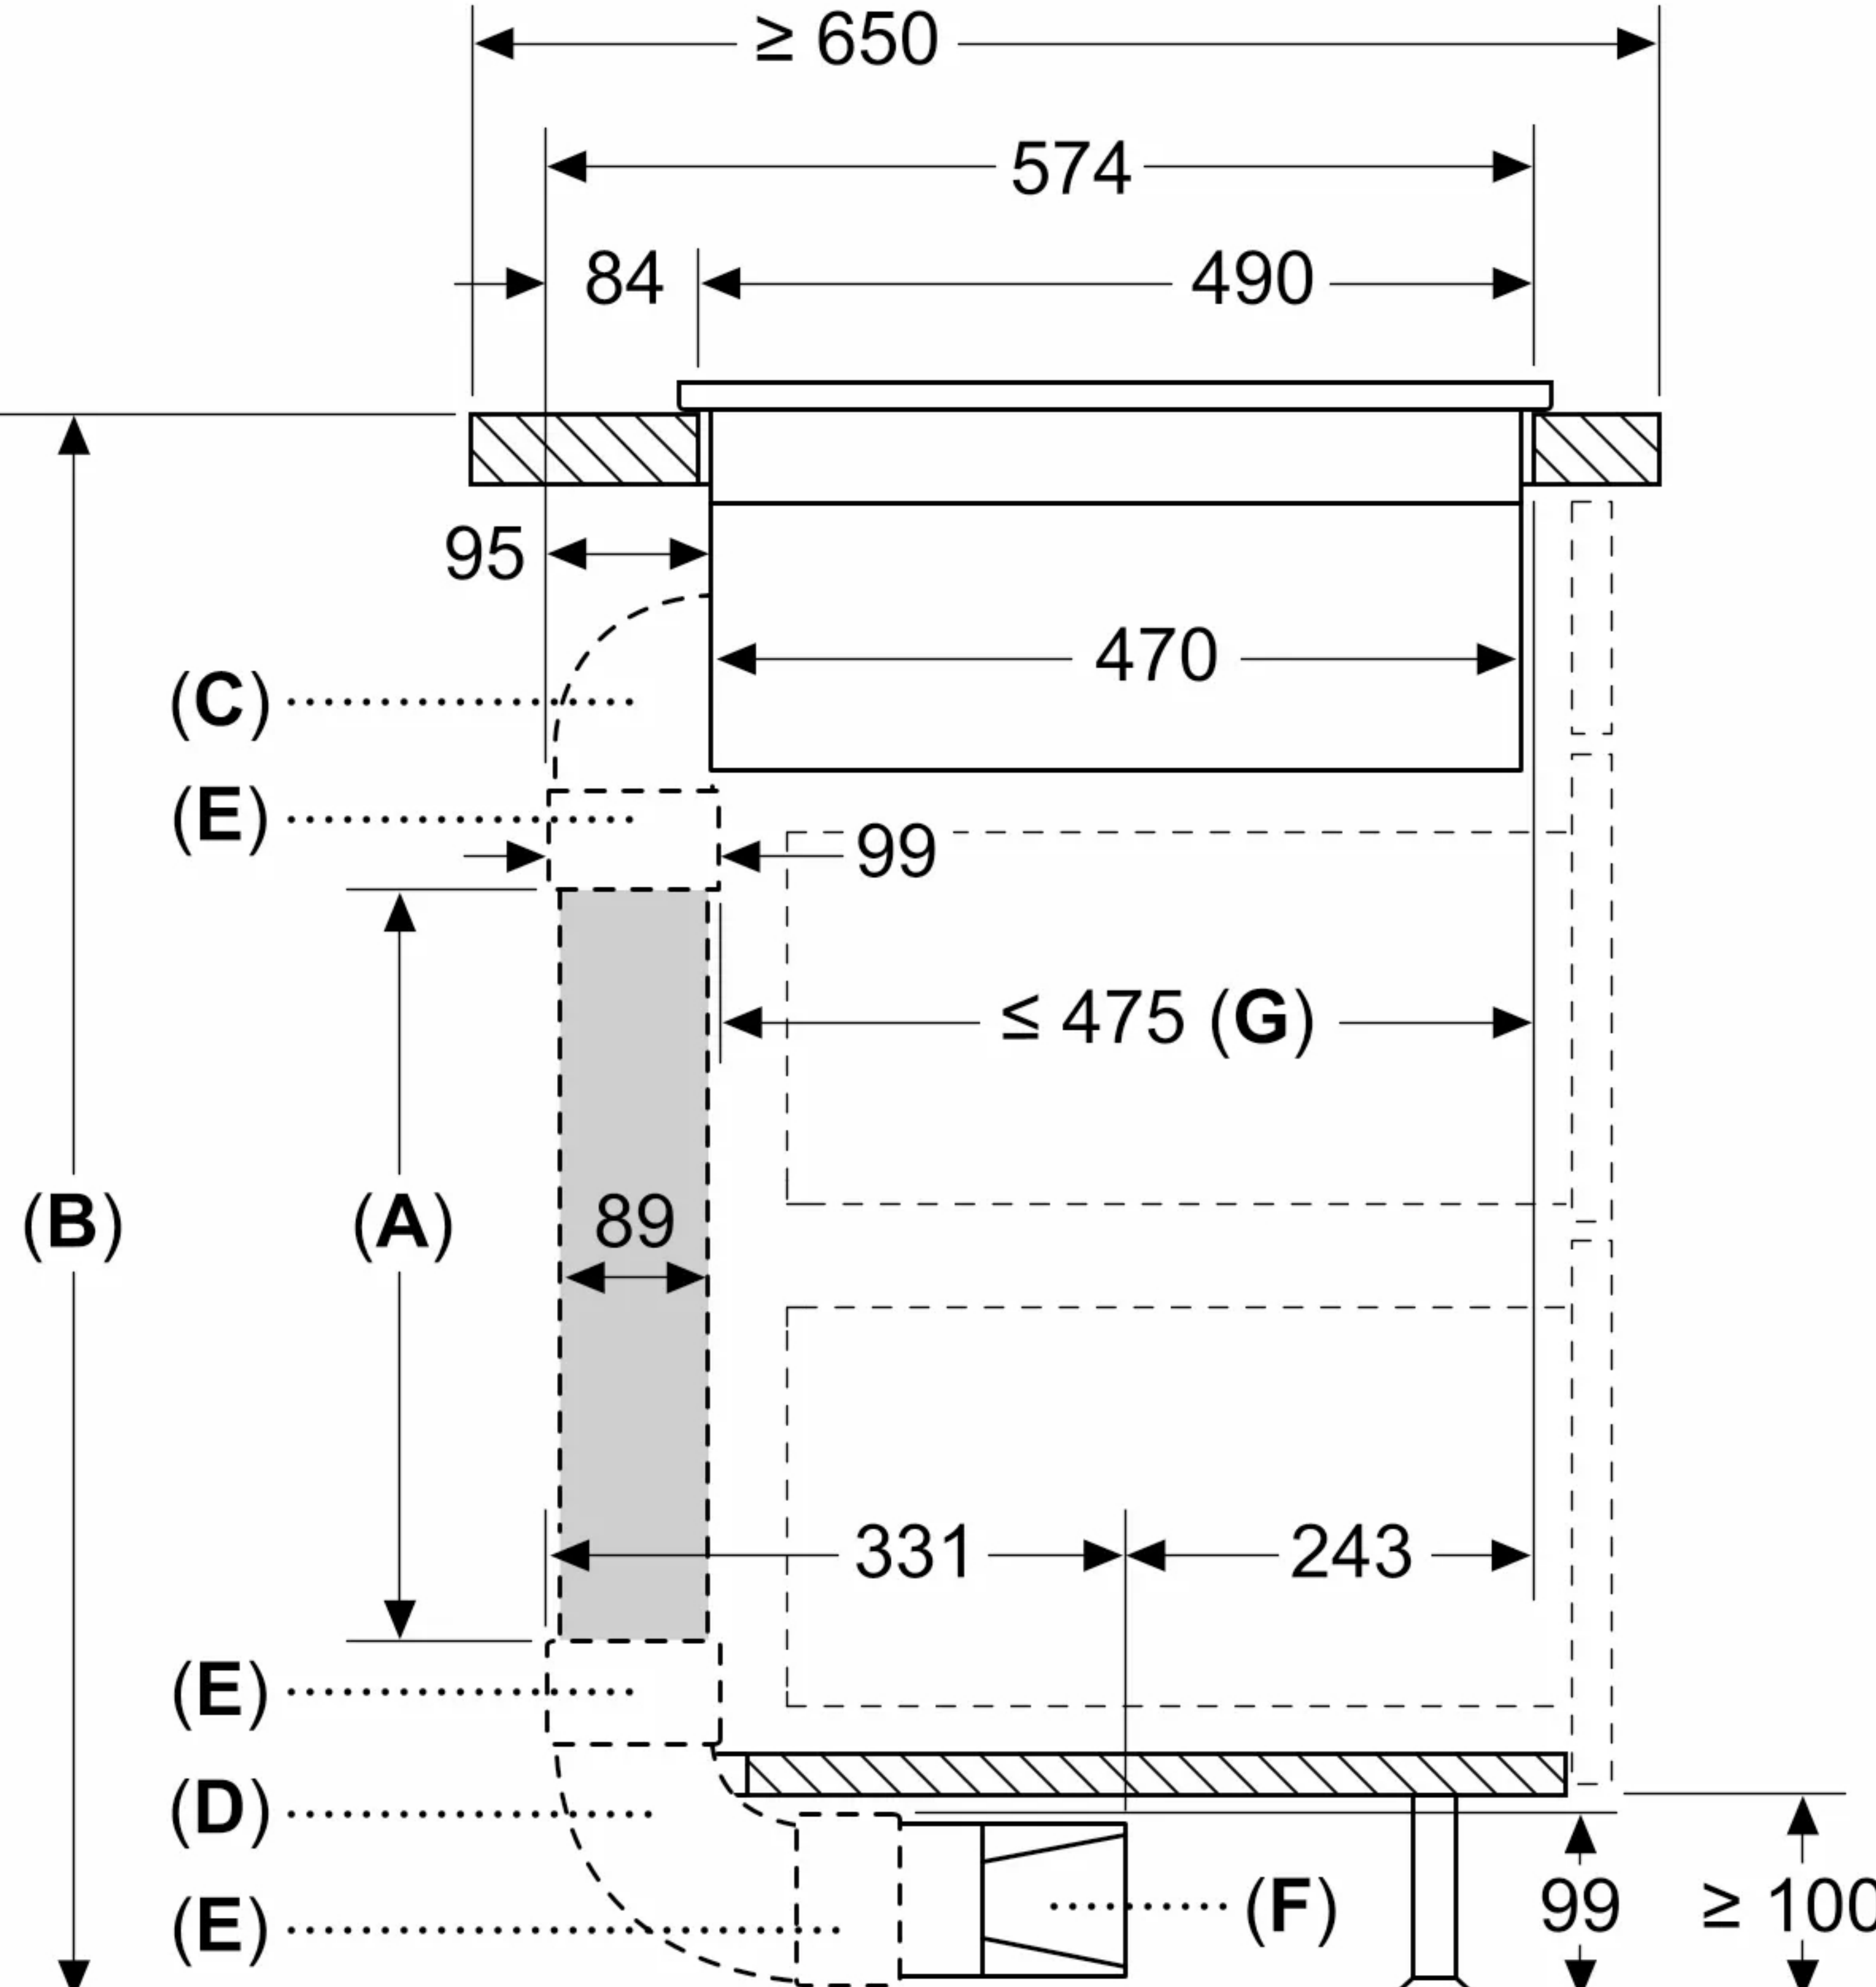


- A:** Tube length
B: Kitchen height
C: 90° M-size bow
D: 90° L-size bow
E: Connector sleeve
F: Diffusor
G: Shortened Drawer

The installer has to select the tube length and if necessary cut it according to the kitchen height

A	B
500	≤ 940
1000	> 940

Measurements in mm

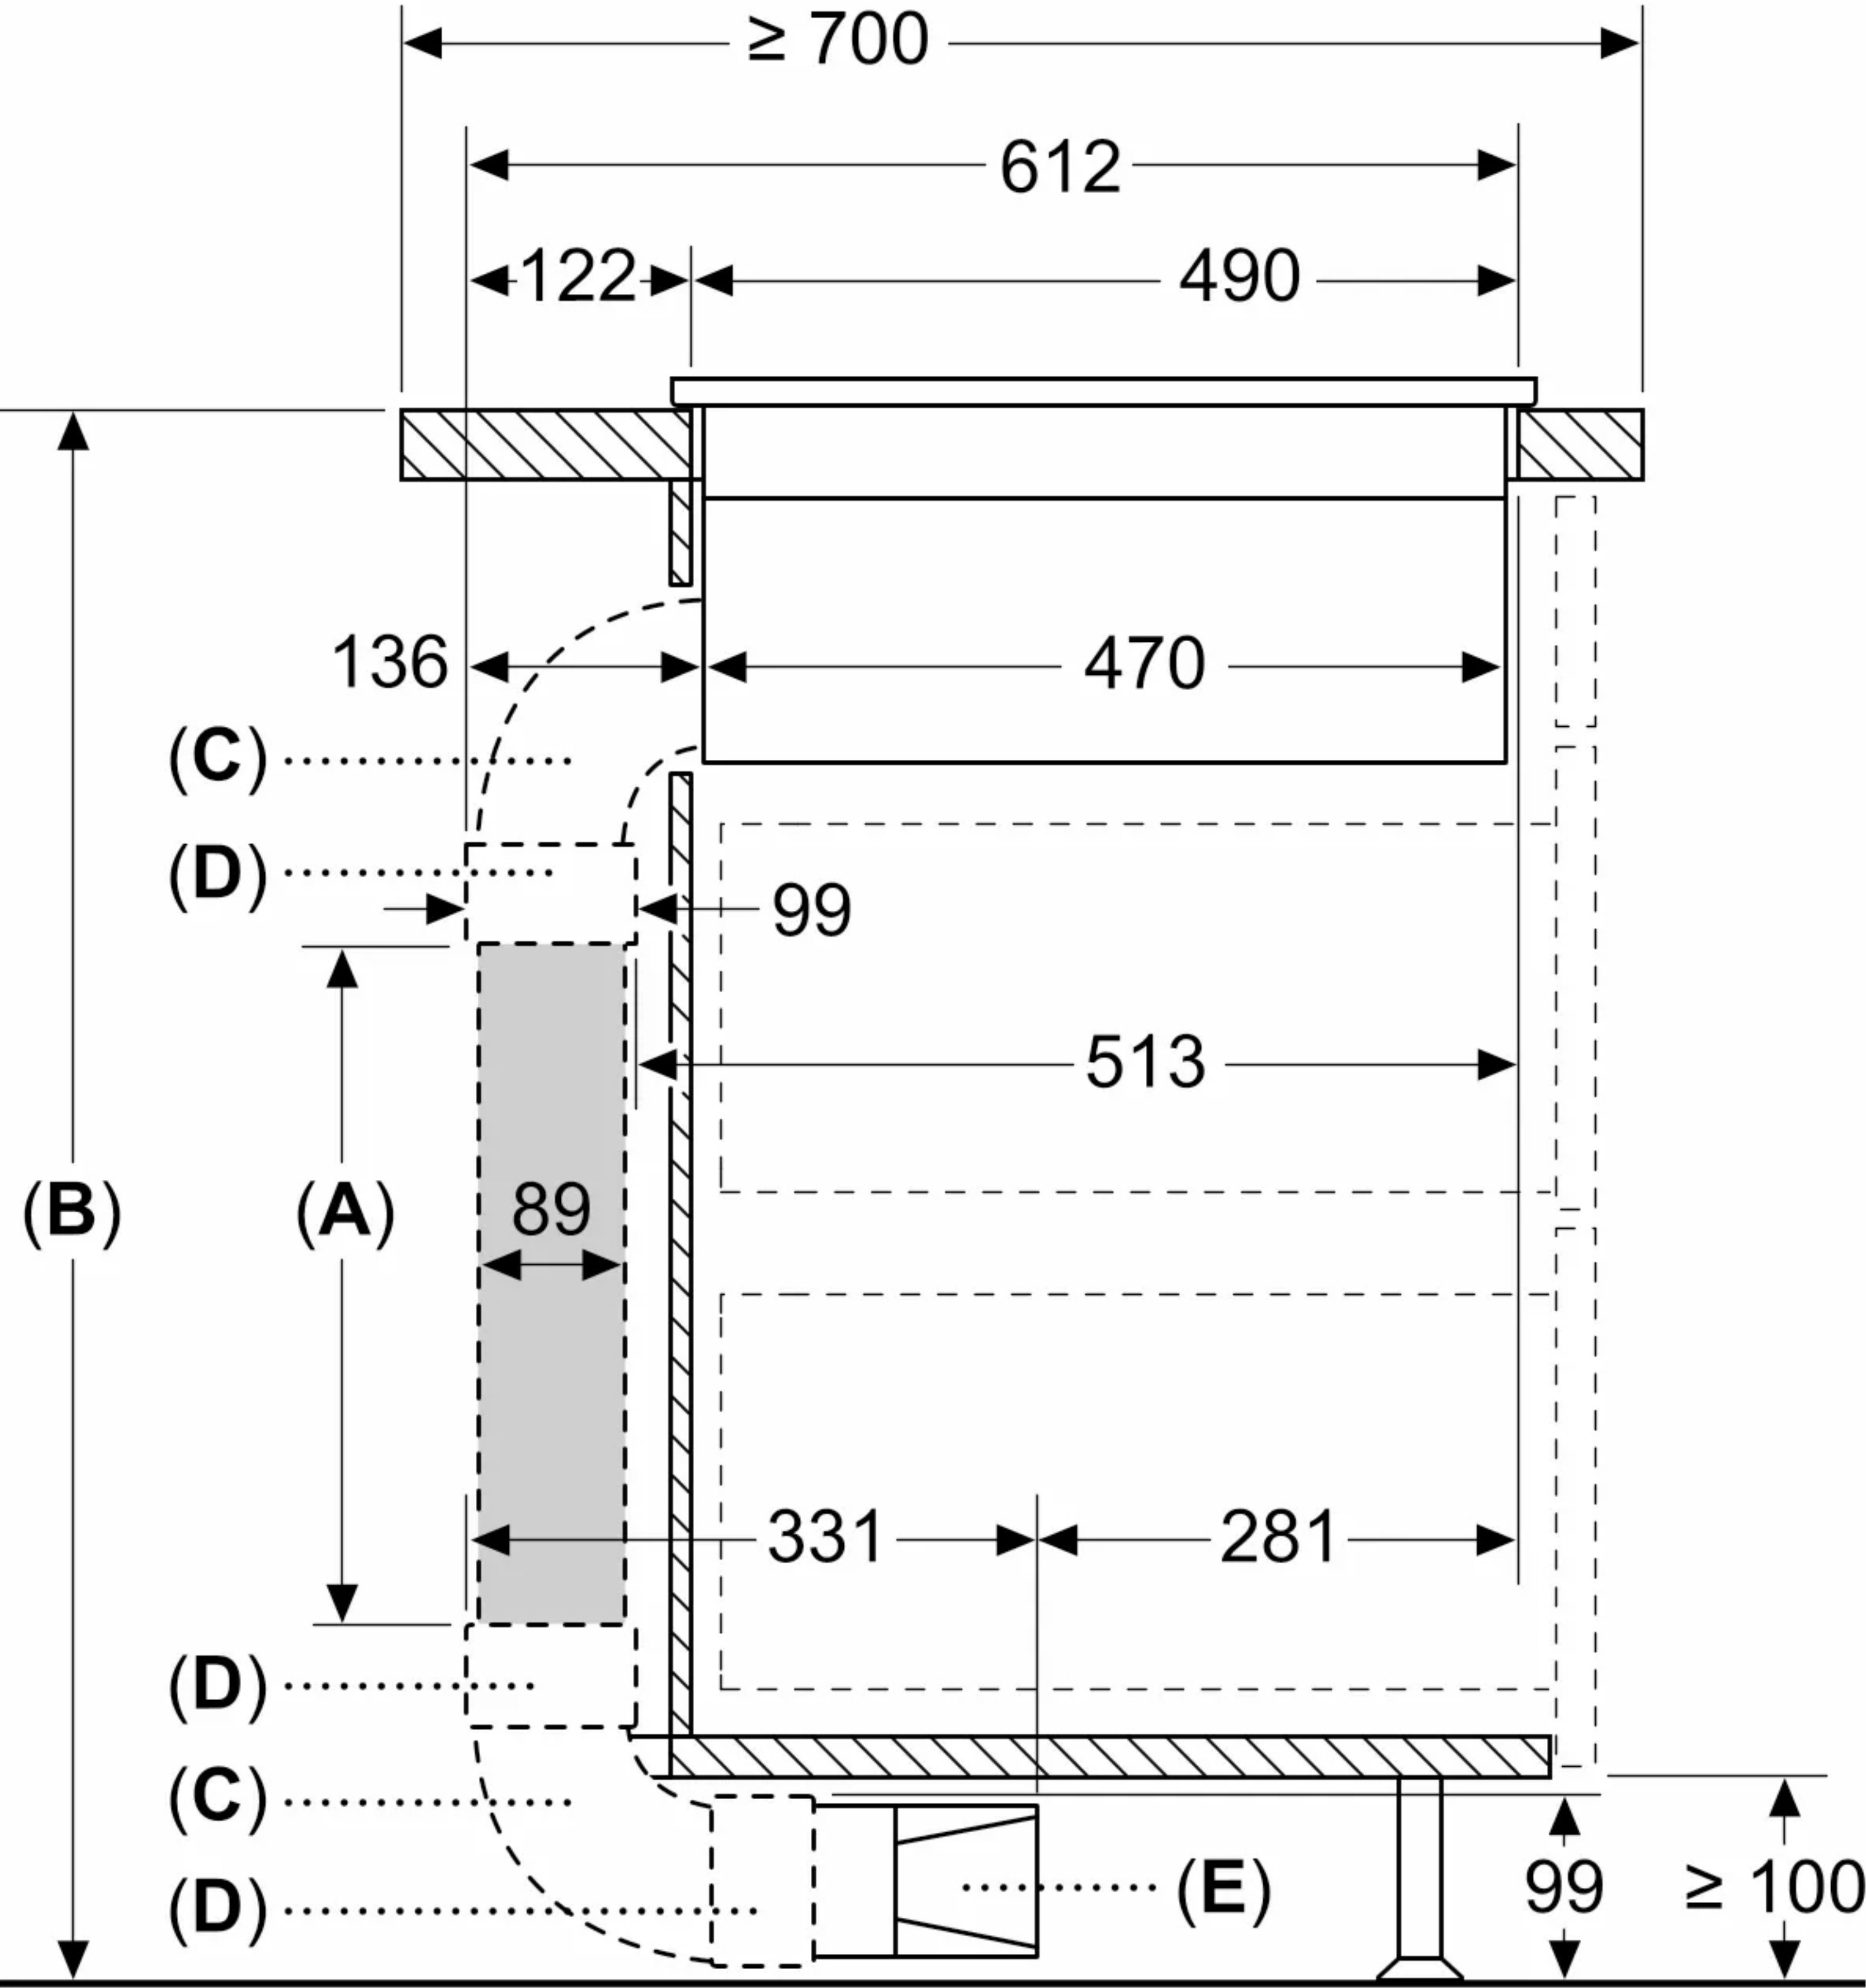



- A:** Tube length
- B:** Kitchen height
- C:** 90° L-size bow
- D:** Connector sleeve
- E:** Diffusor

Ducting kit available for ≥ 700 mm depth worktops and up to 960 mm height


The installer has to select the tube length and if necessary cut it according to the kitchen height

A	B
500	≤ 960
1000	> 960

measurements in mm

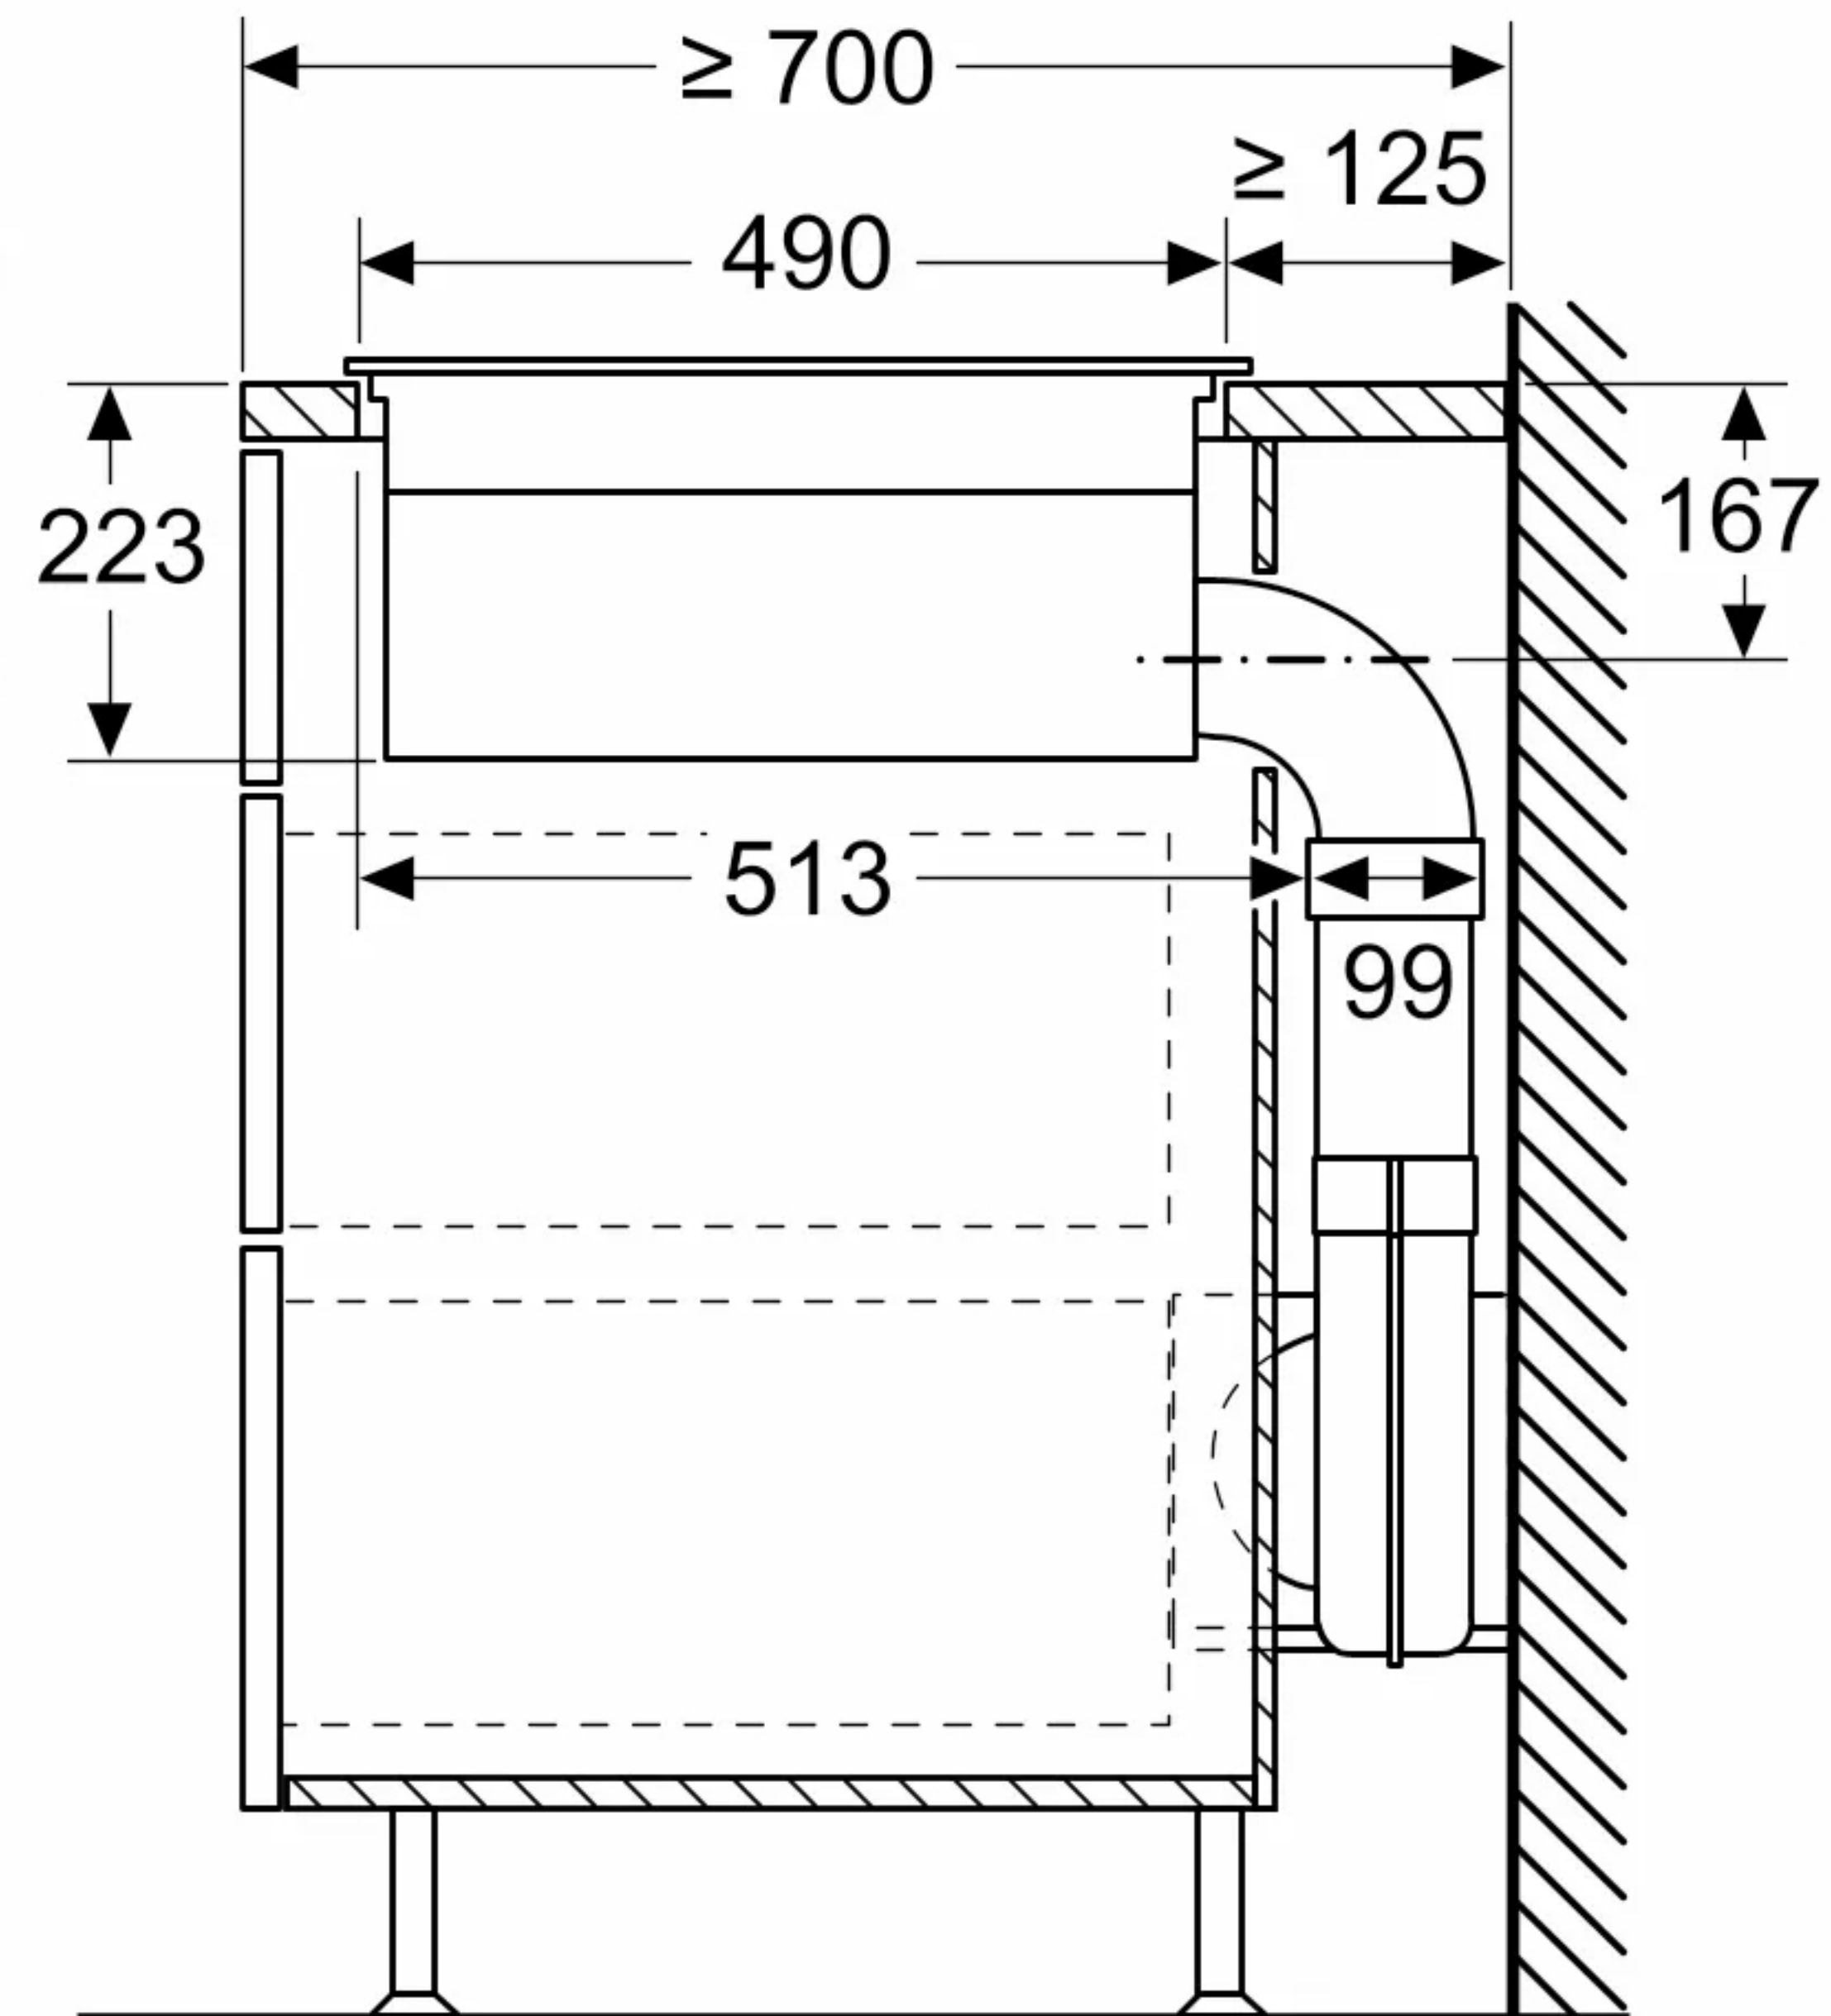
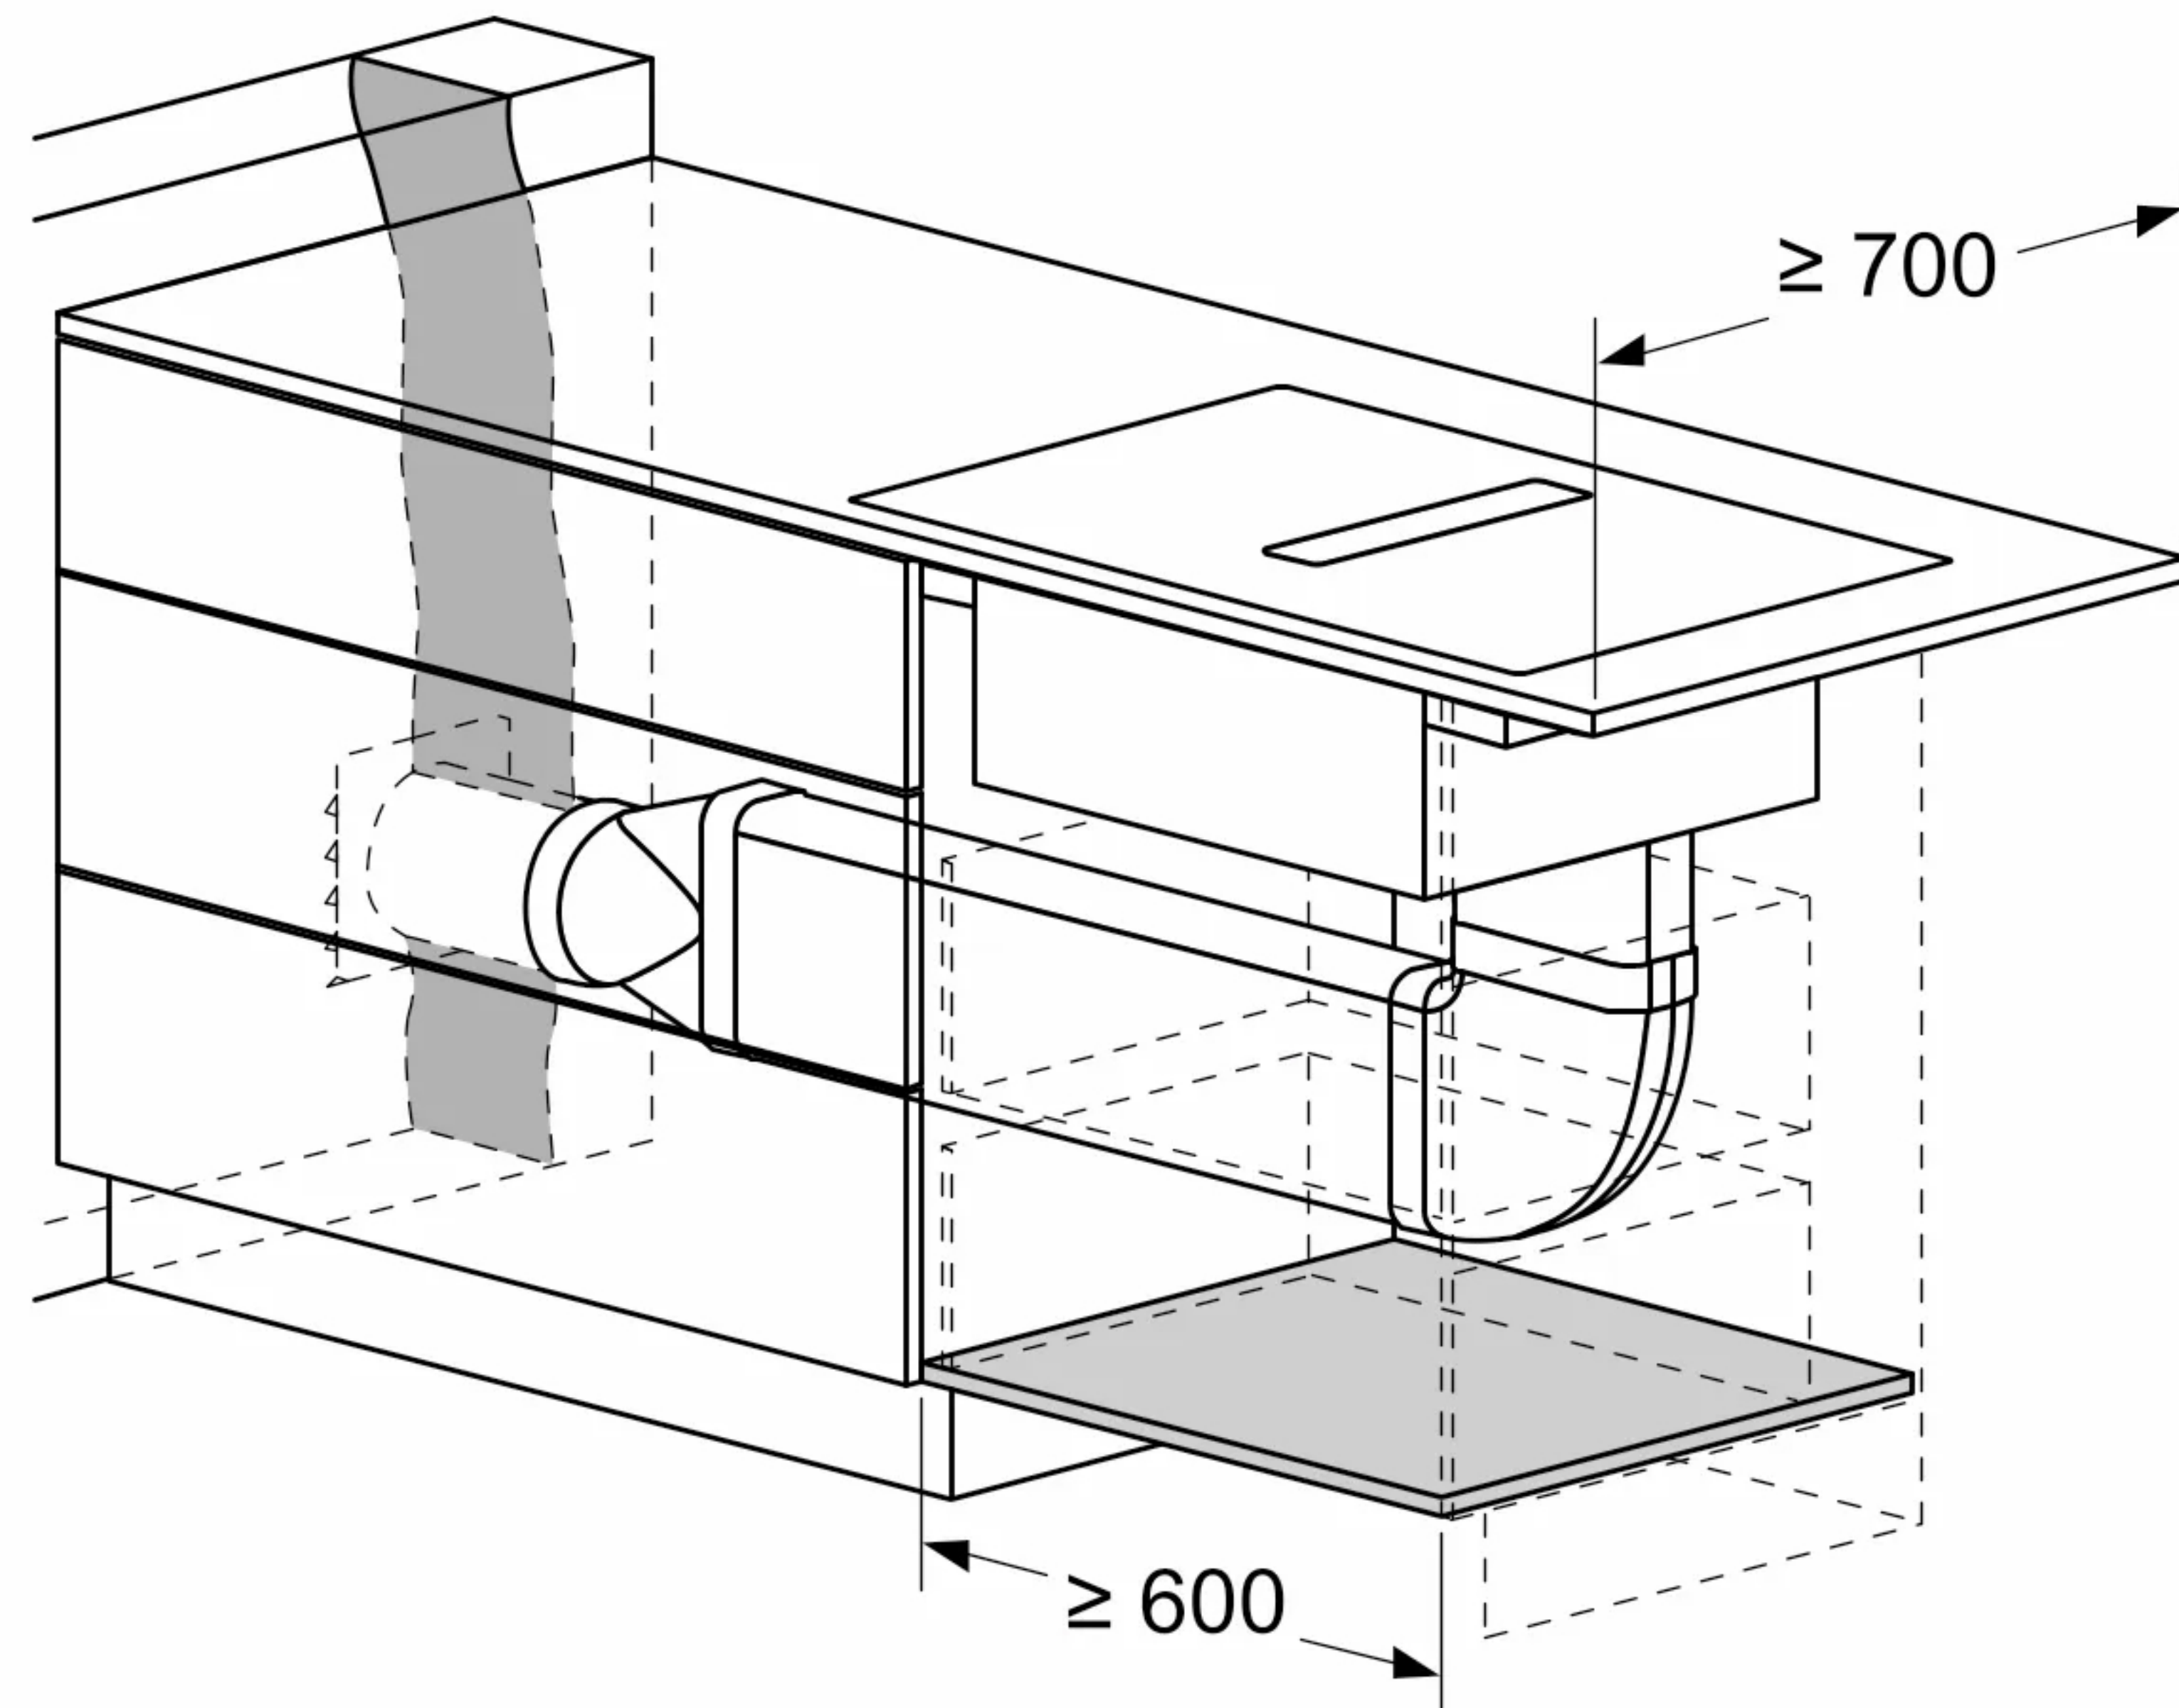


measurements in mm
Front view


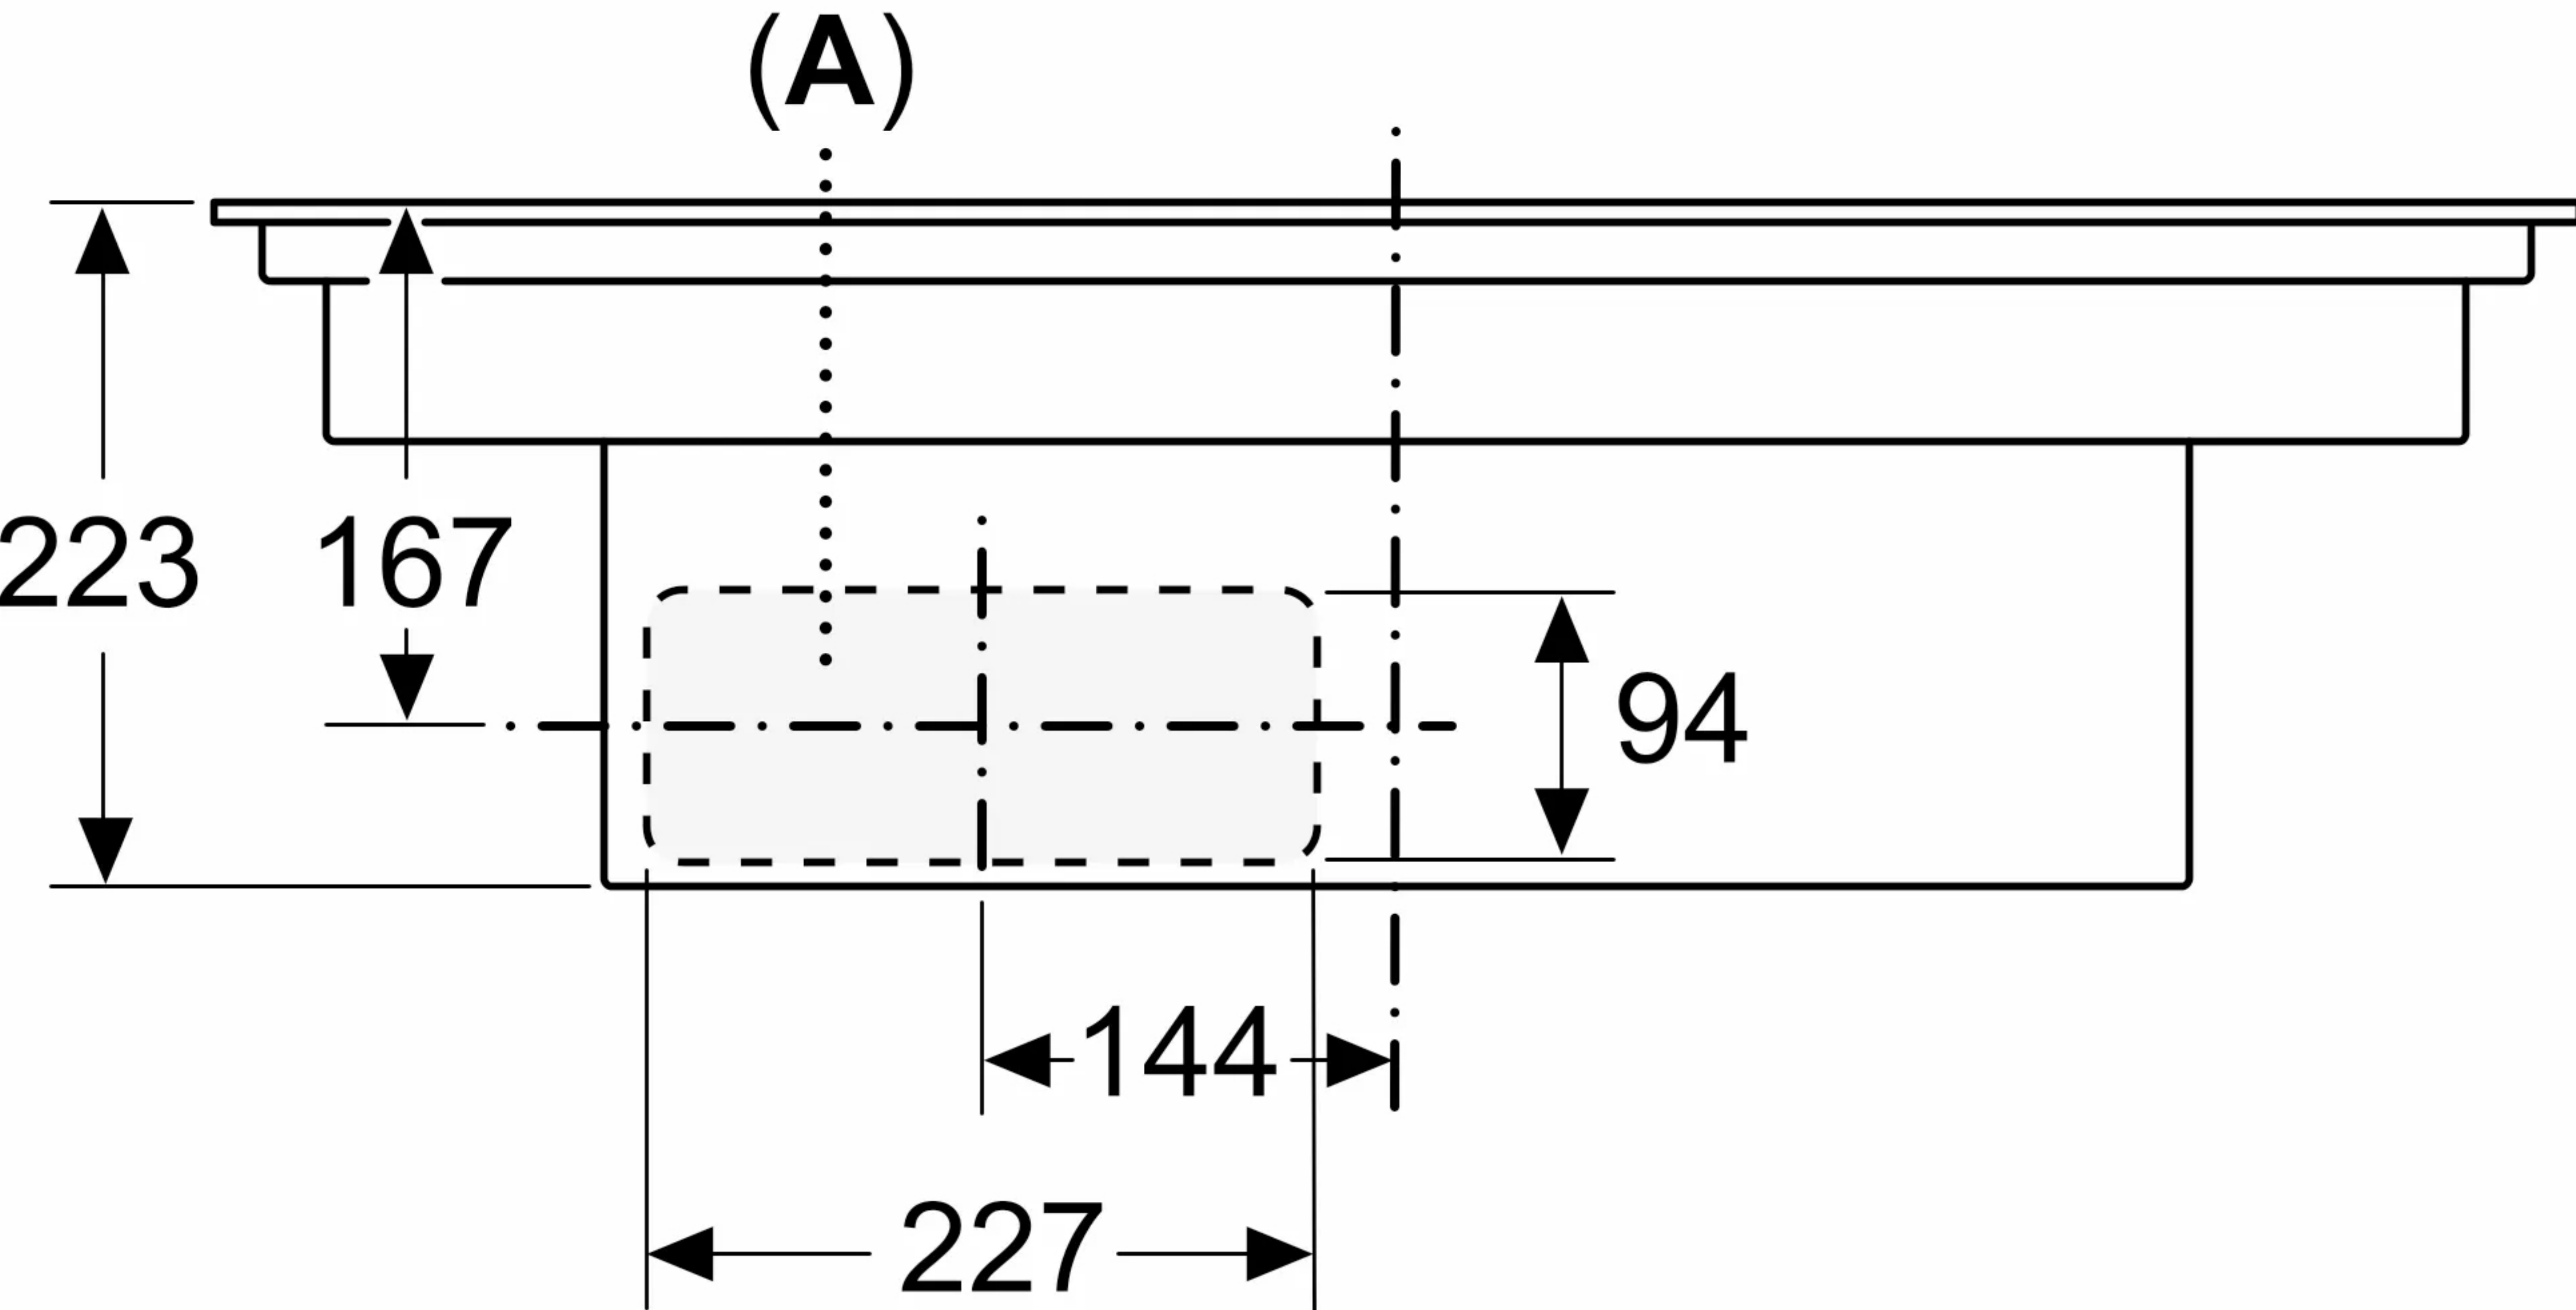


A: Connected directly at the rear


measurements in mm

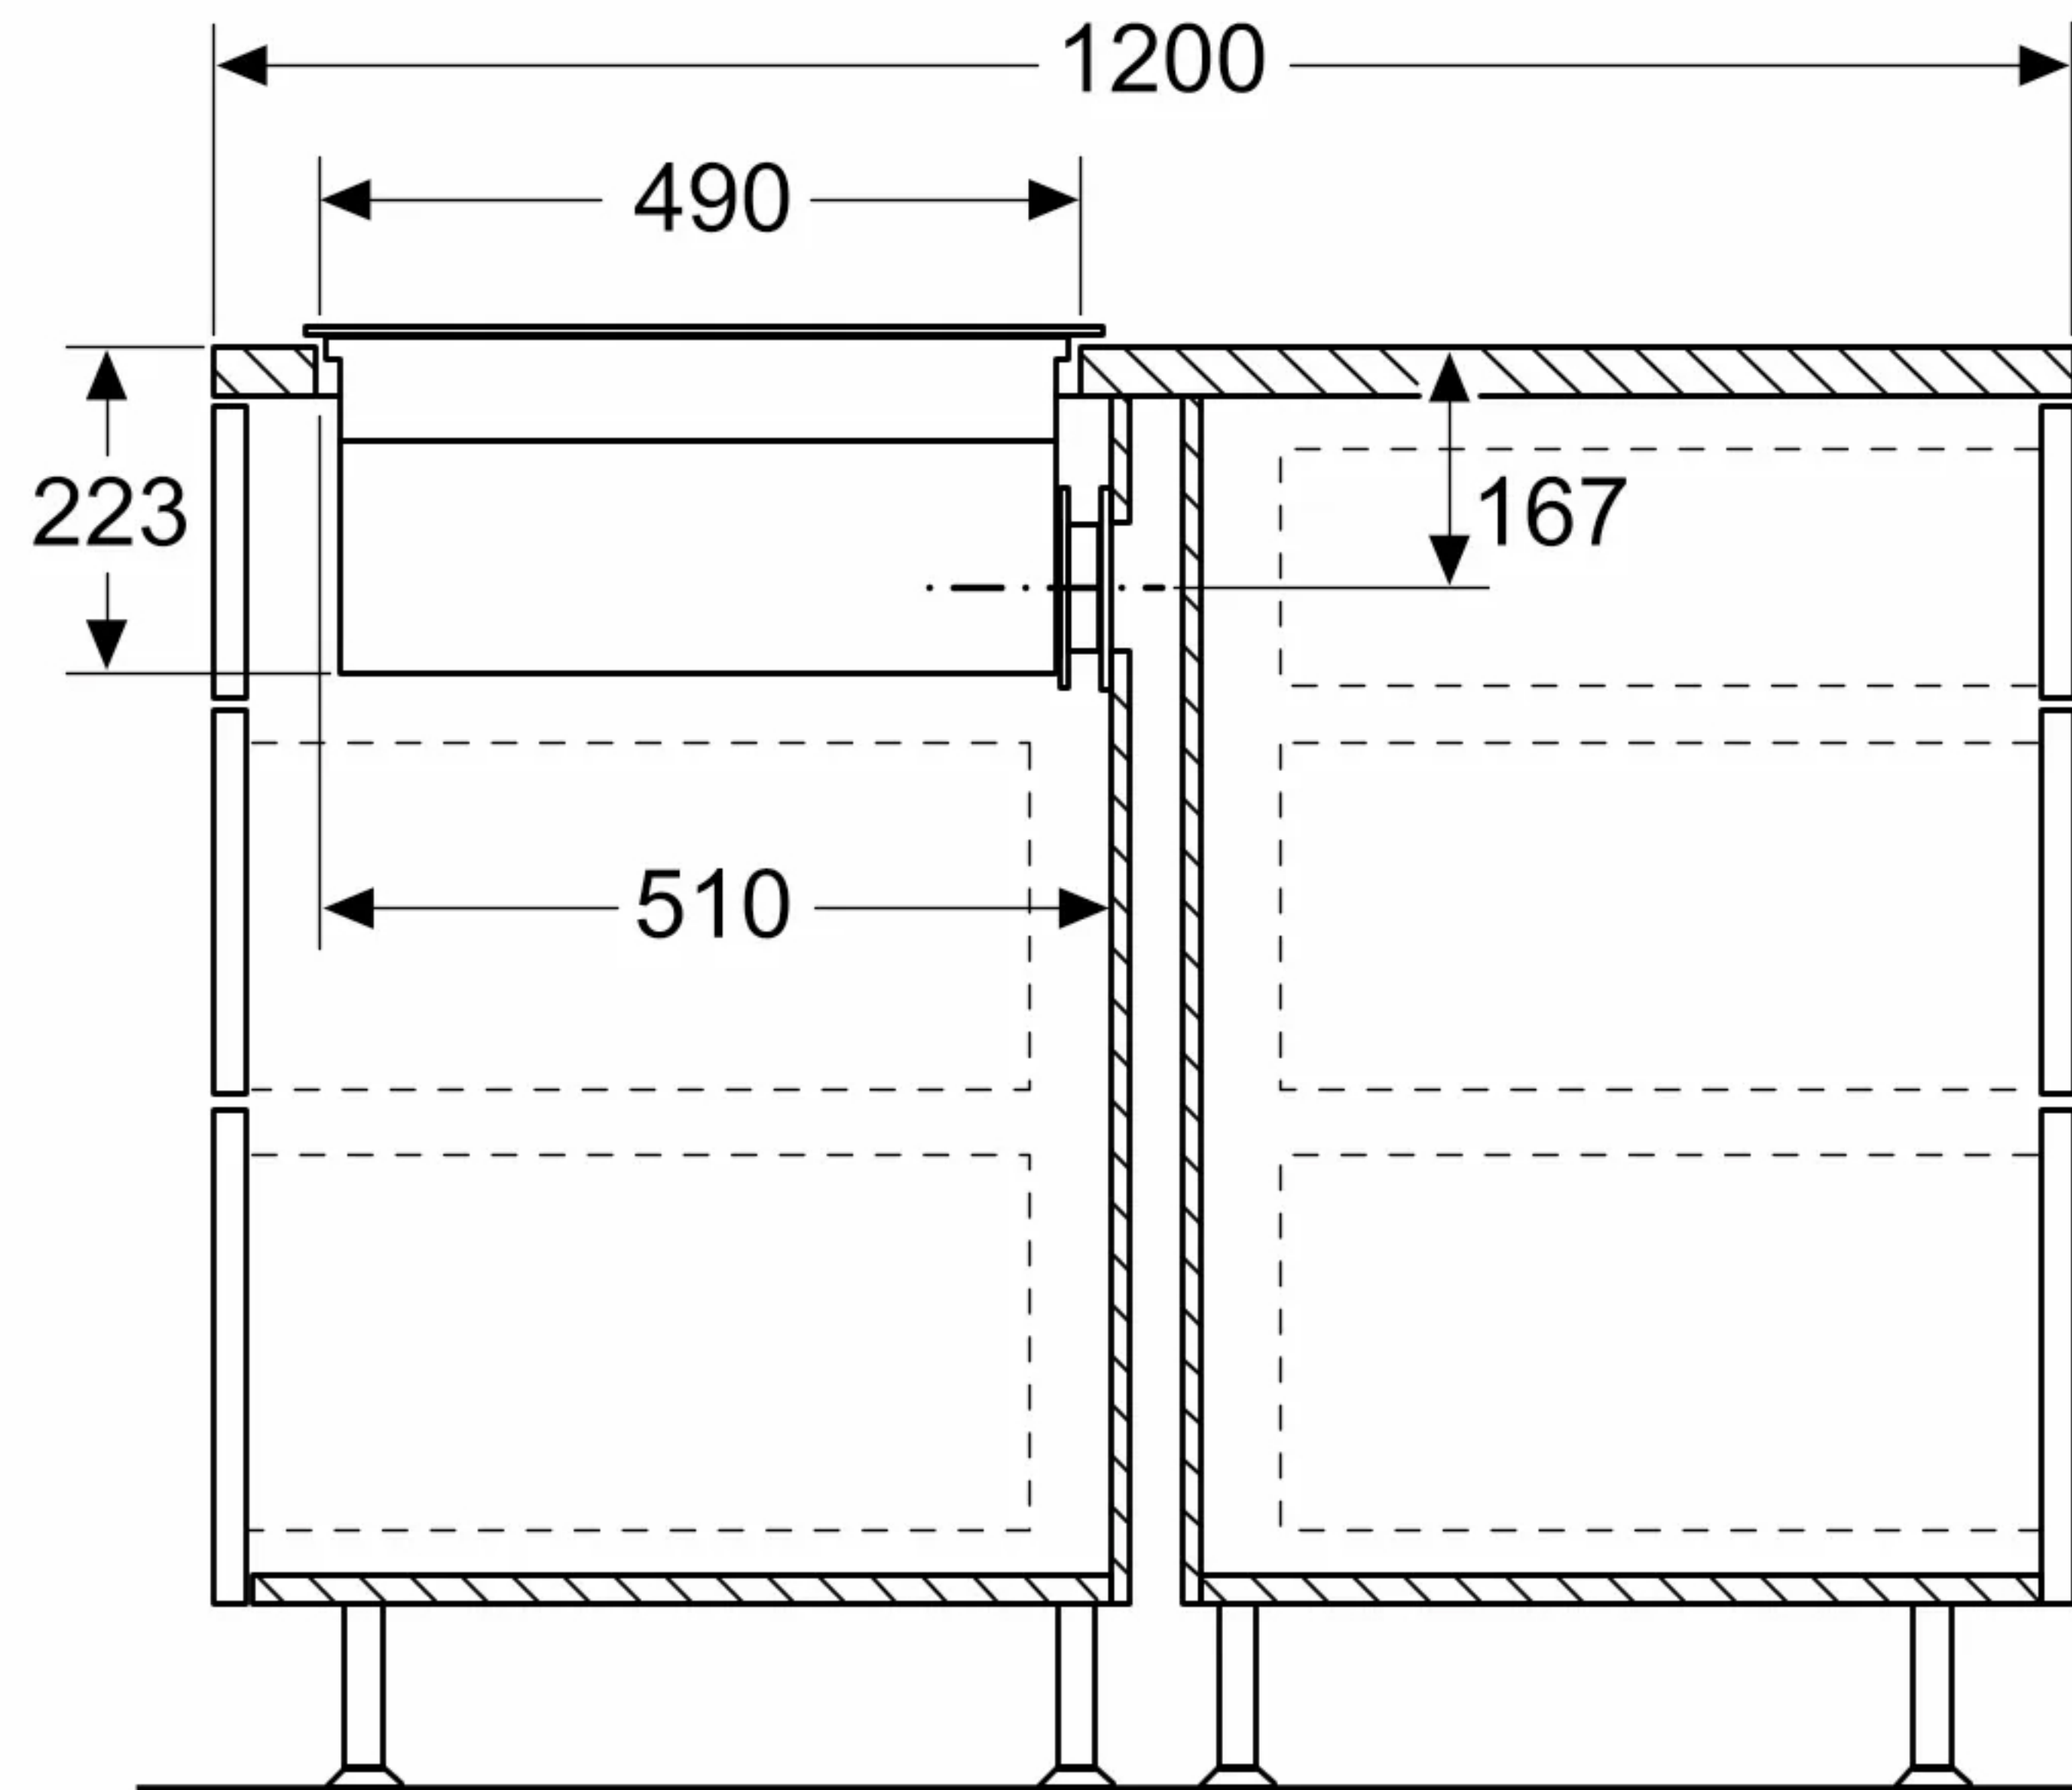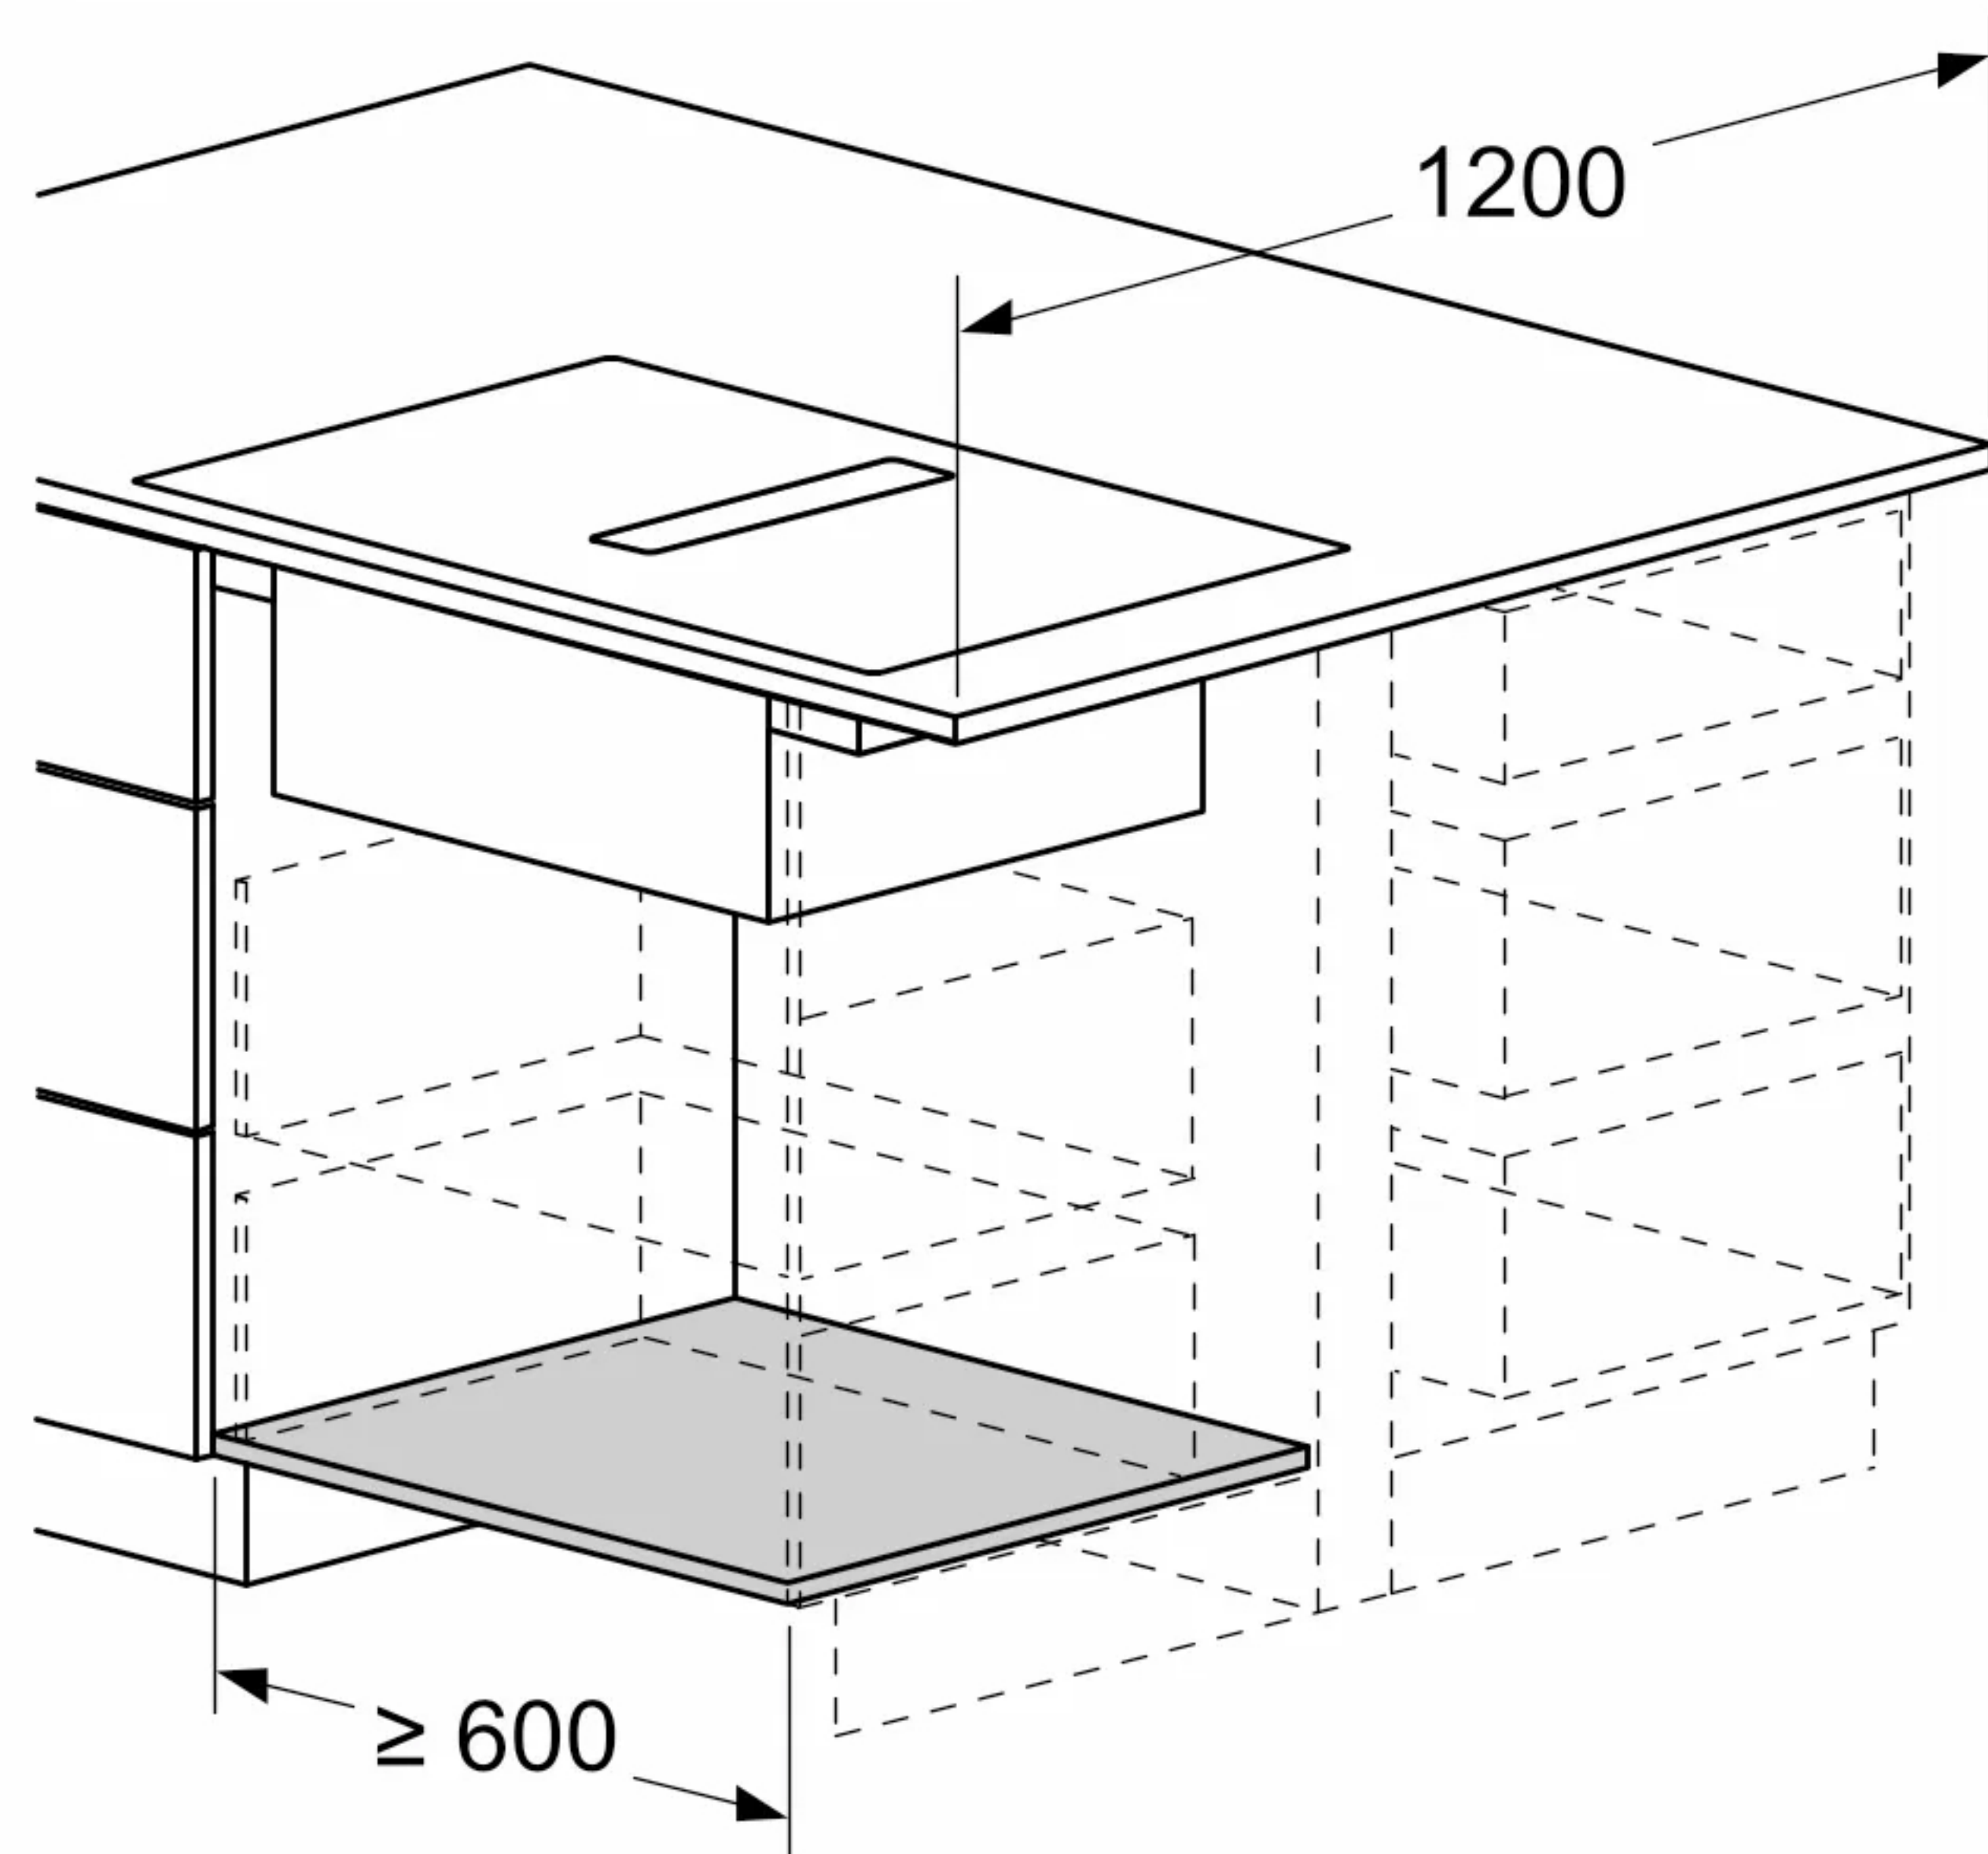

measurements in mm

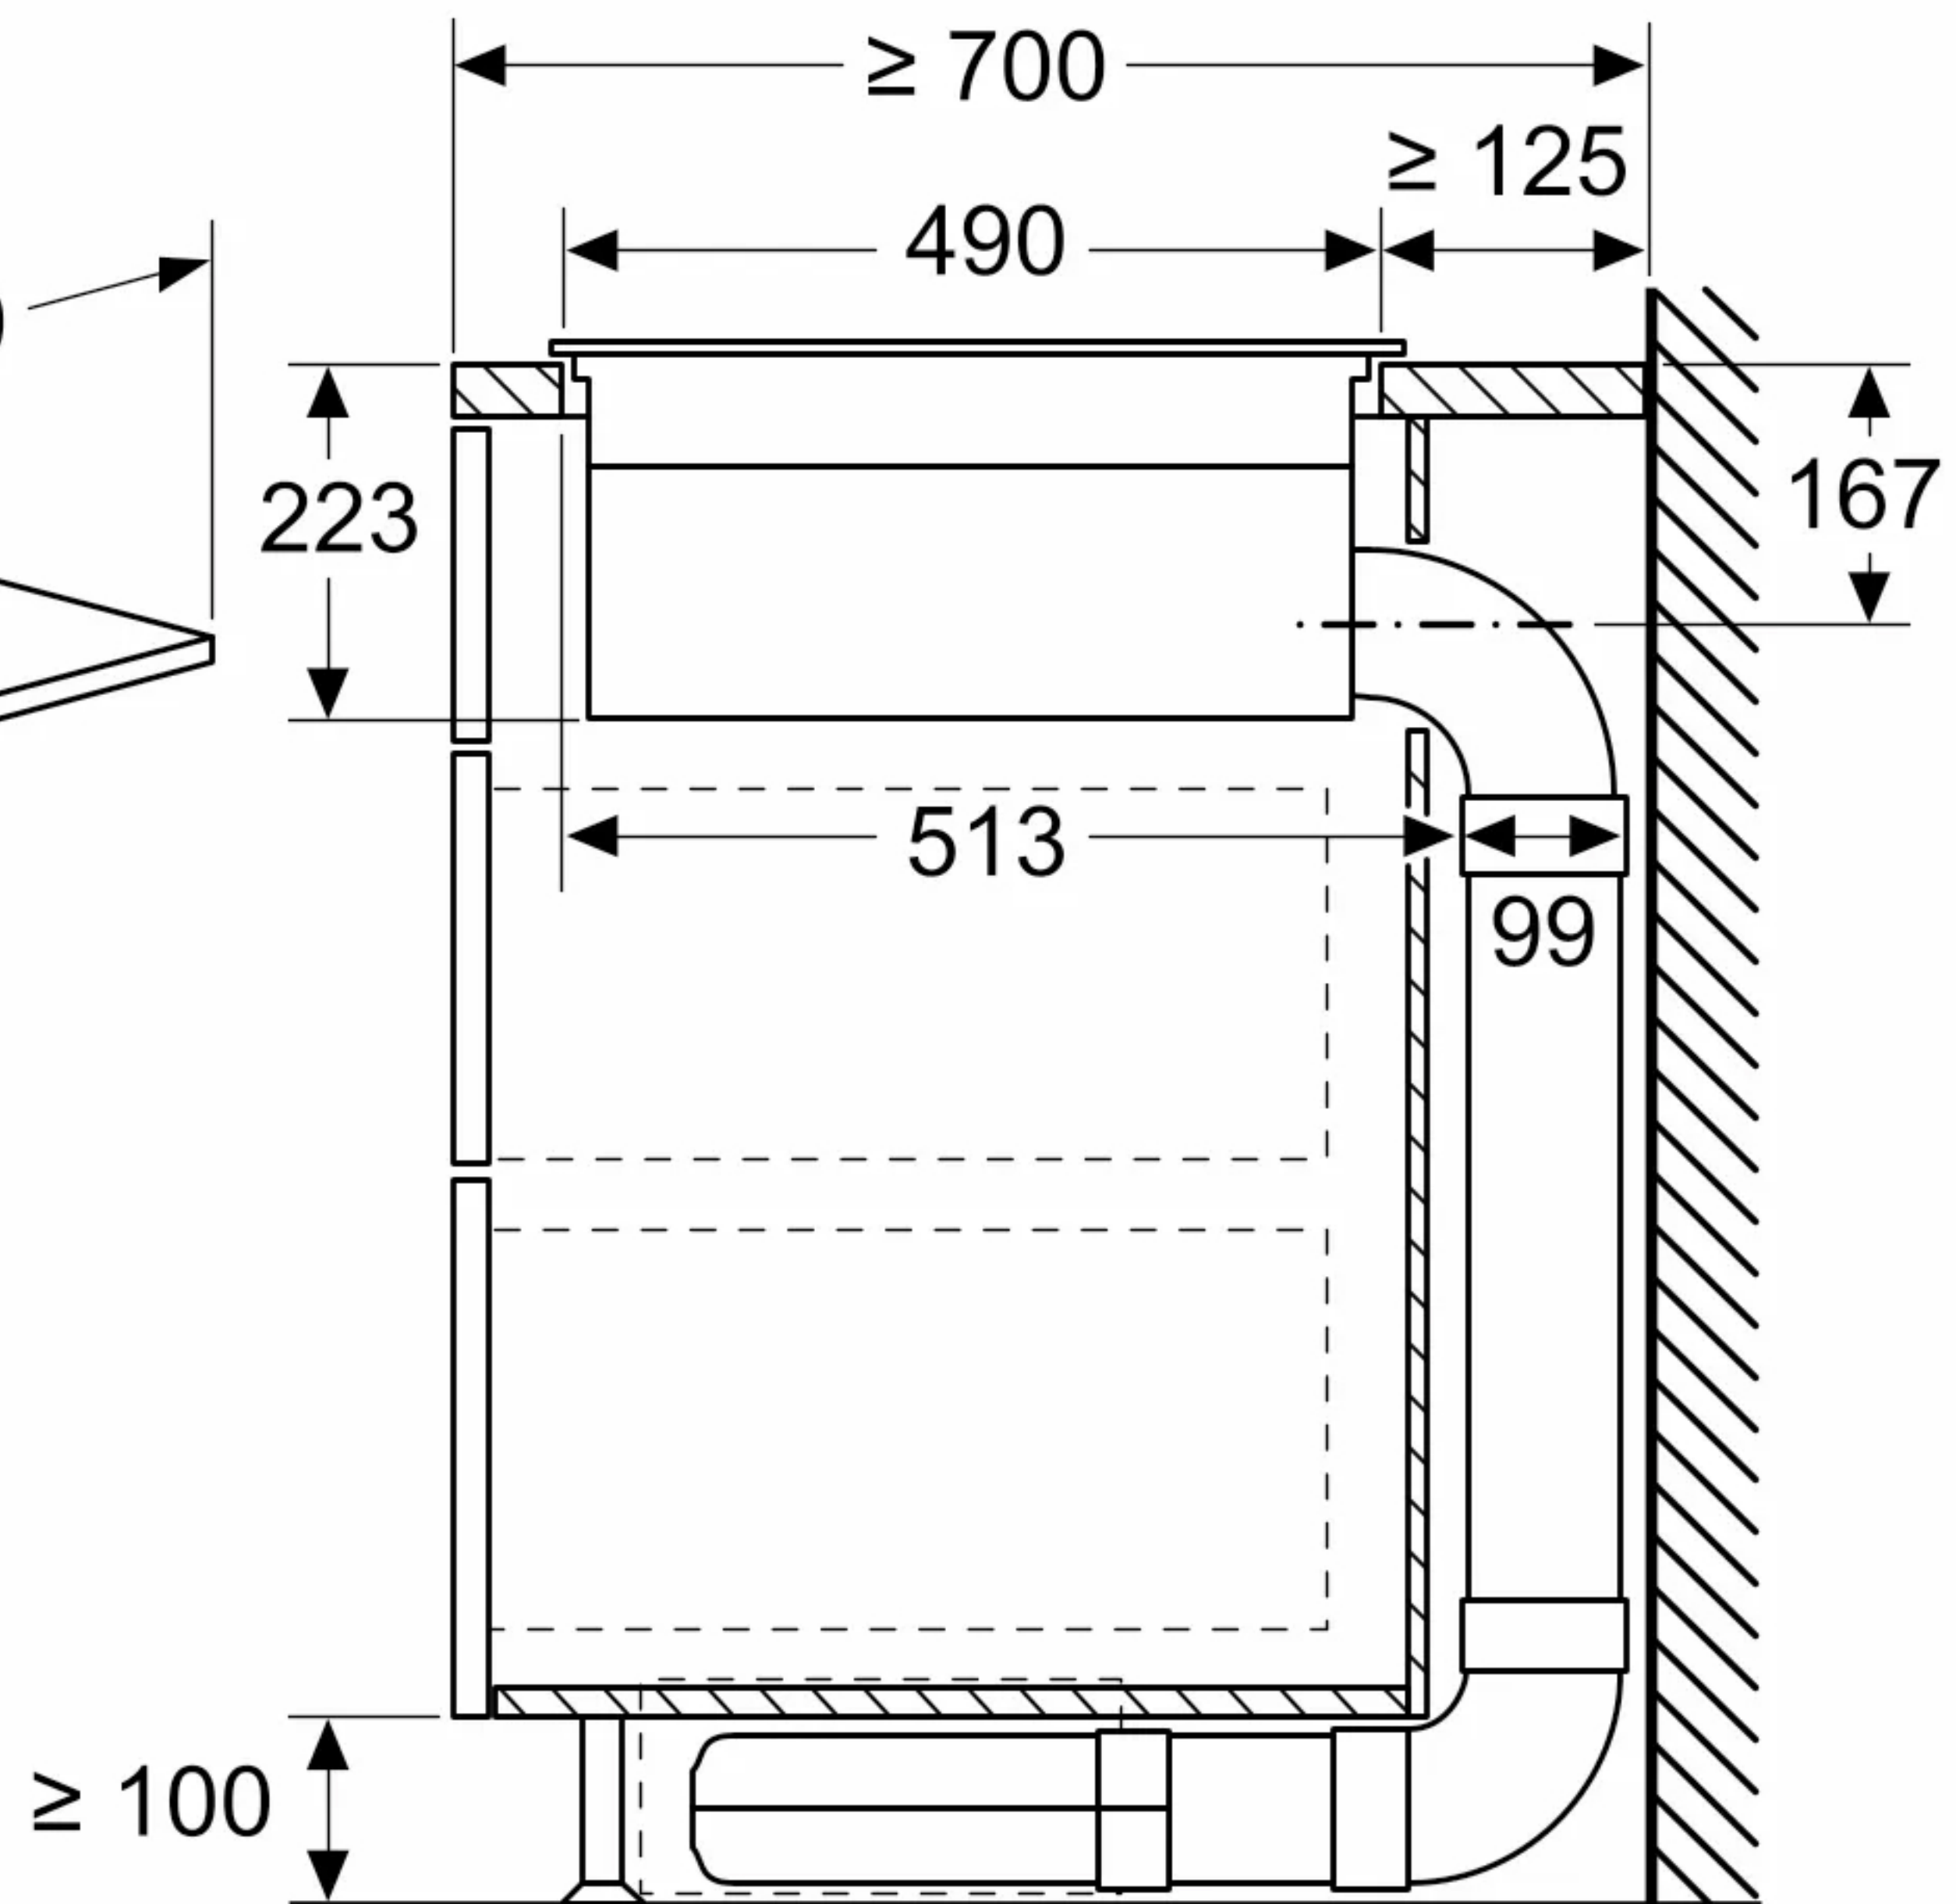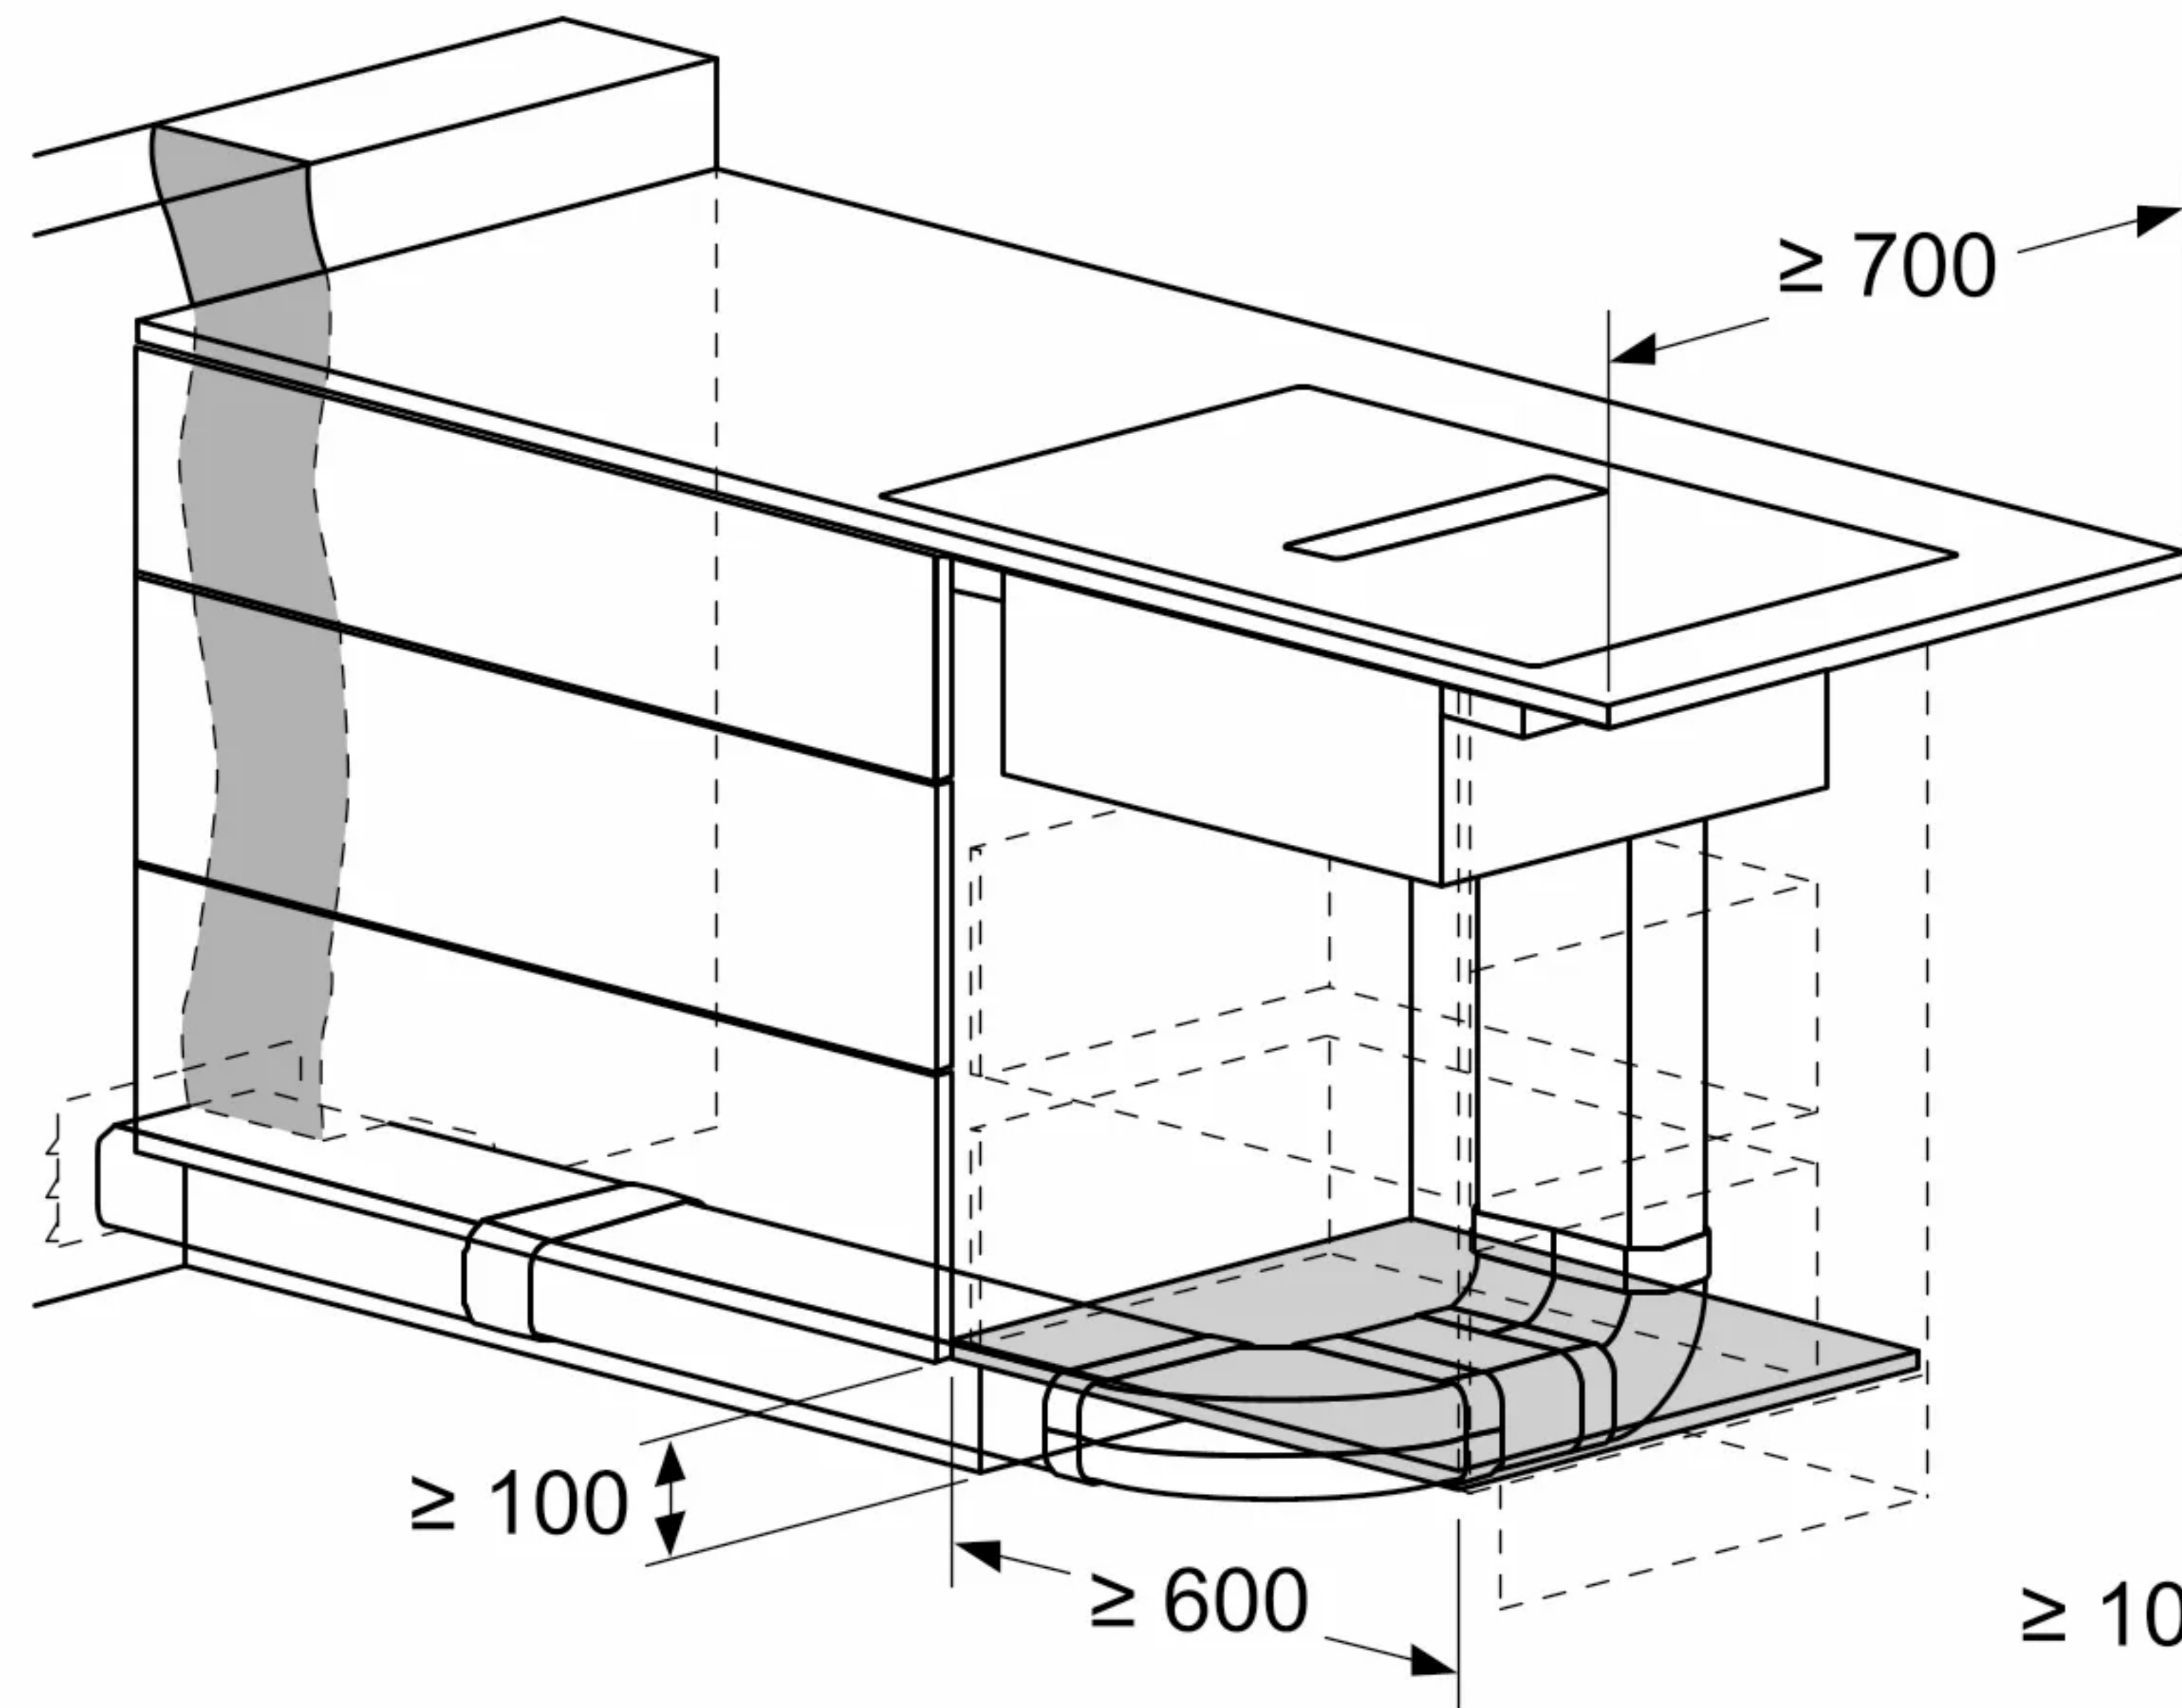

measurements in mm


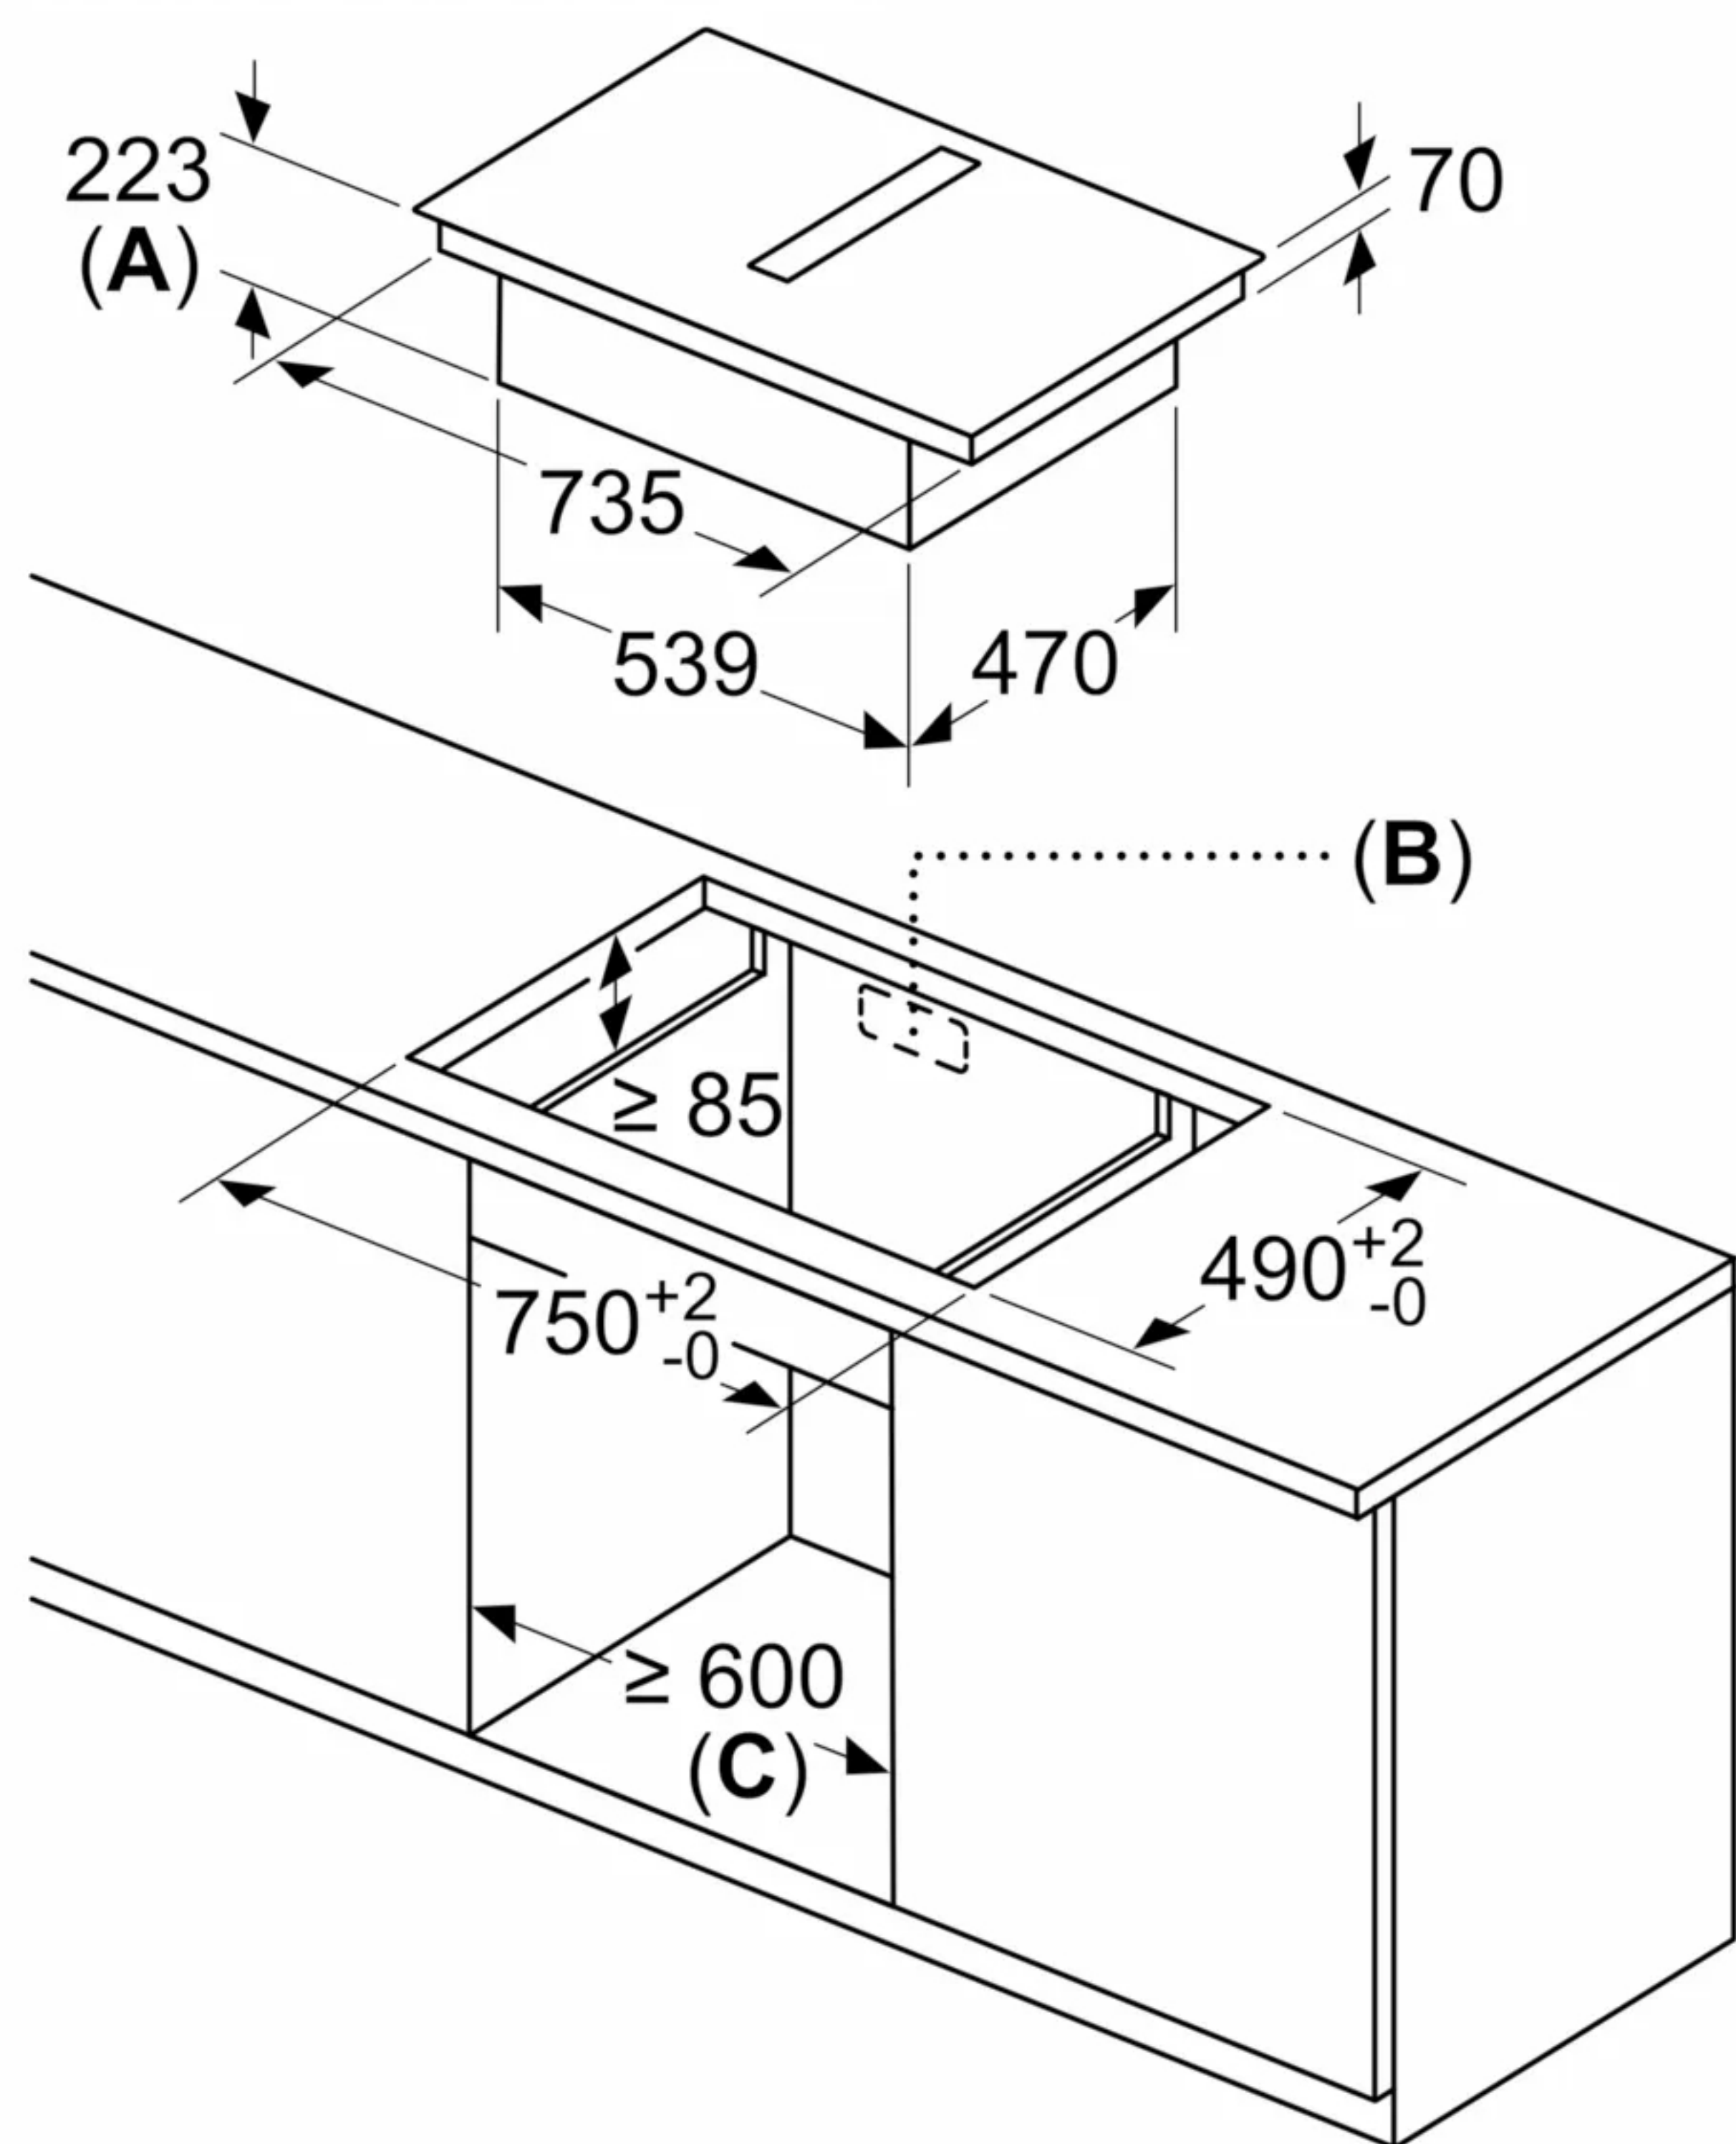


A: Recess depth



B: Cut-out in back panel required for pipework.
Exact size and position can be taken from
specific drawing.

C: All 80 cm width class models can be
installed in 60 cm wide furniture by
adjusting the side panels.


measurements in mm

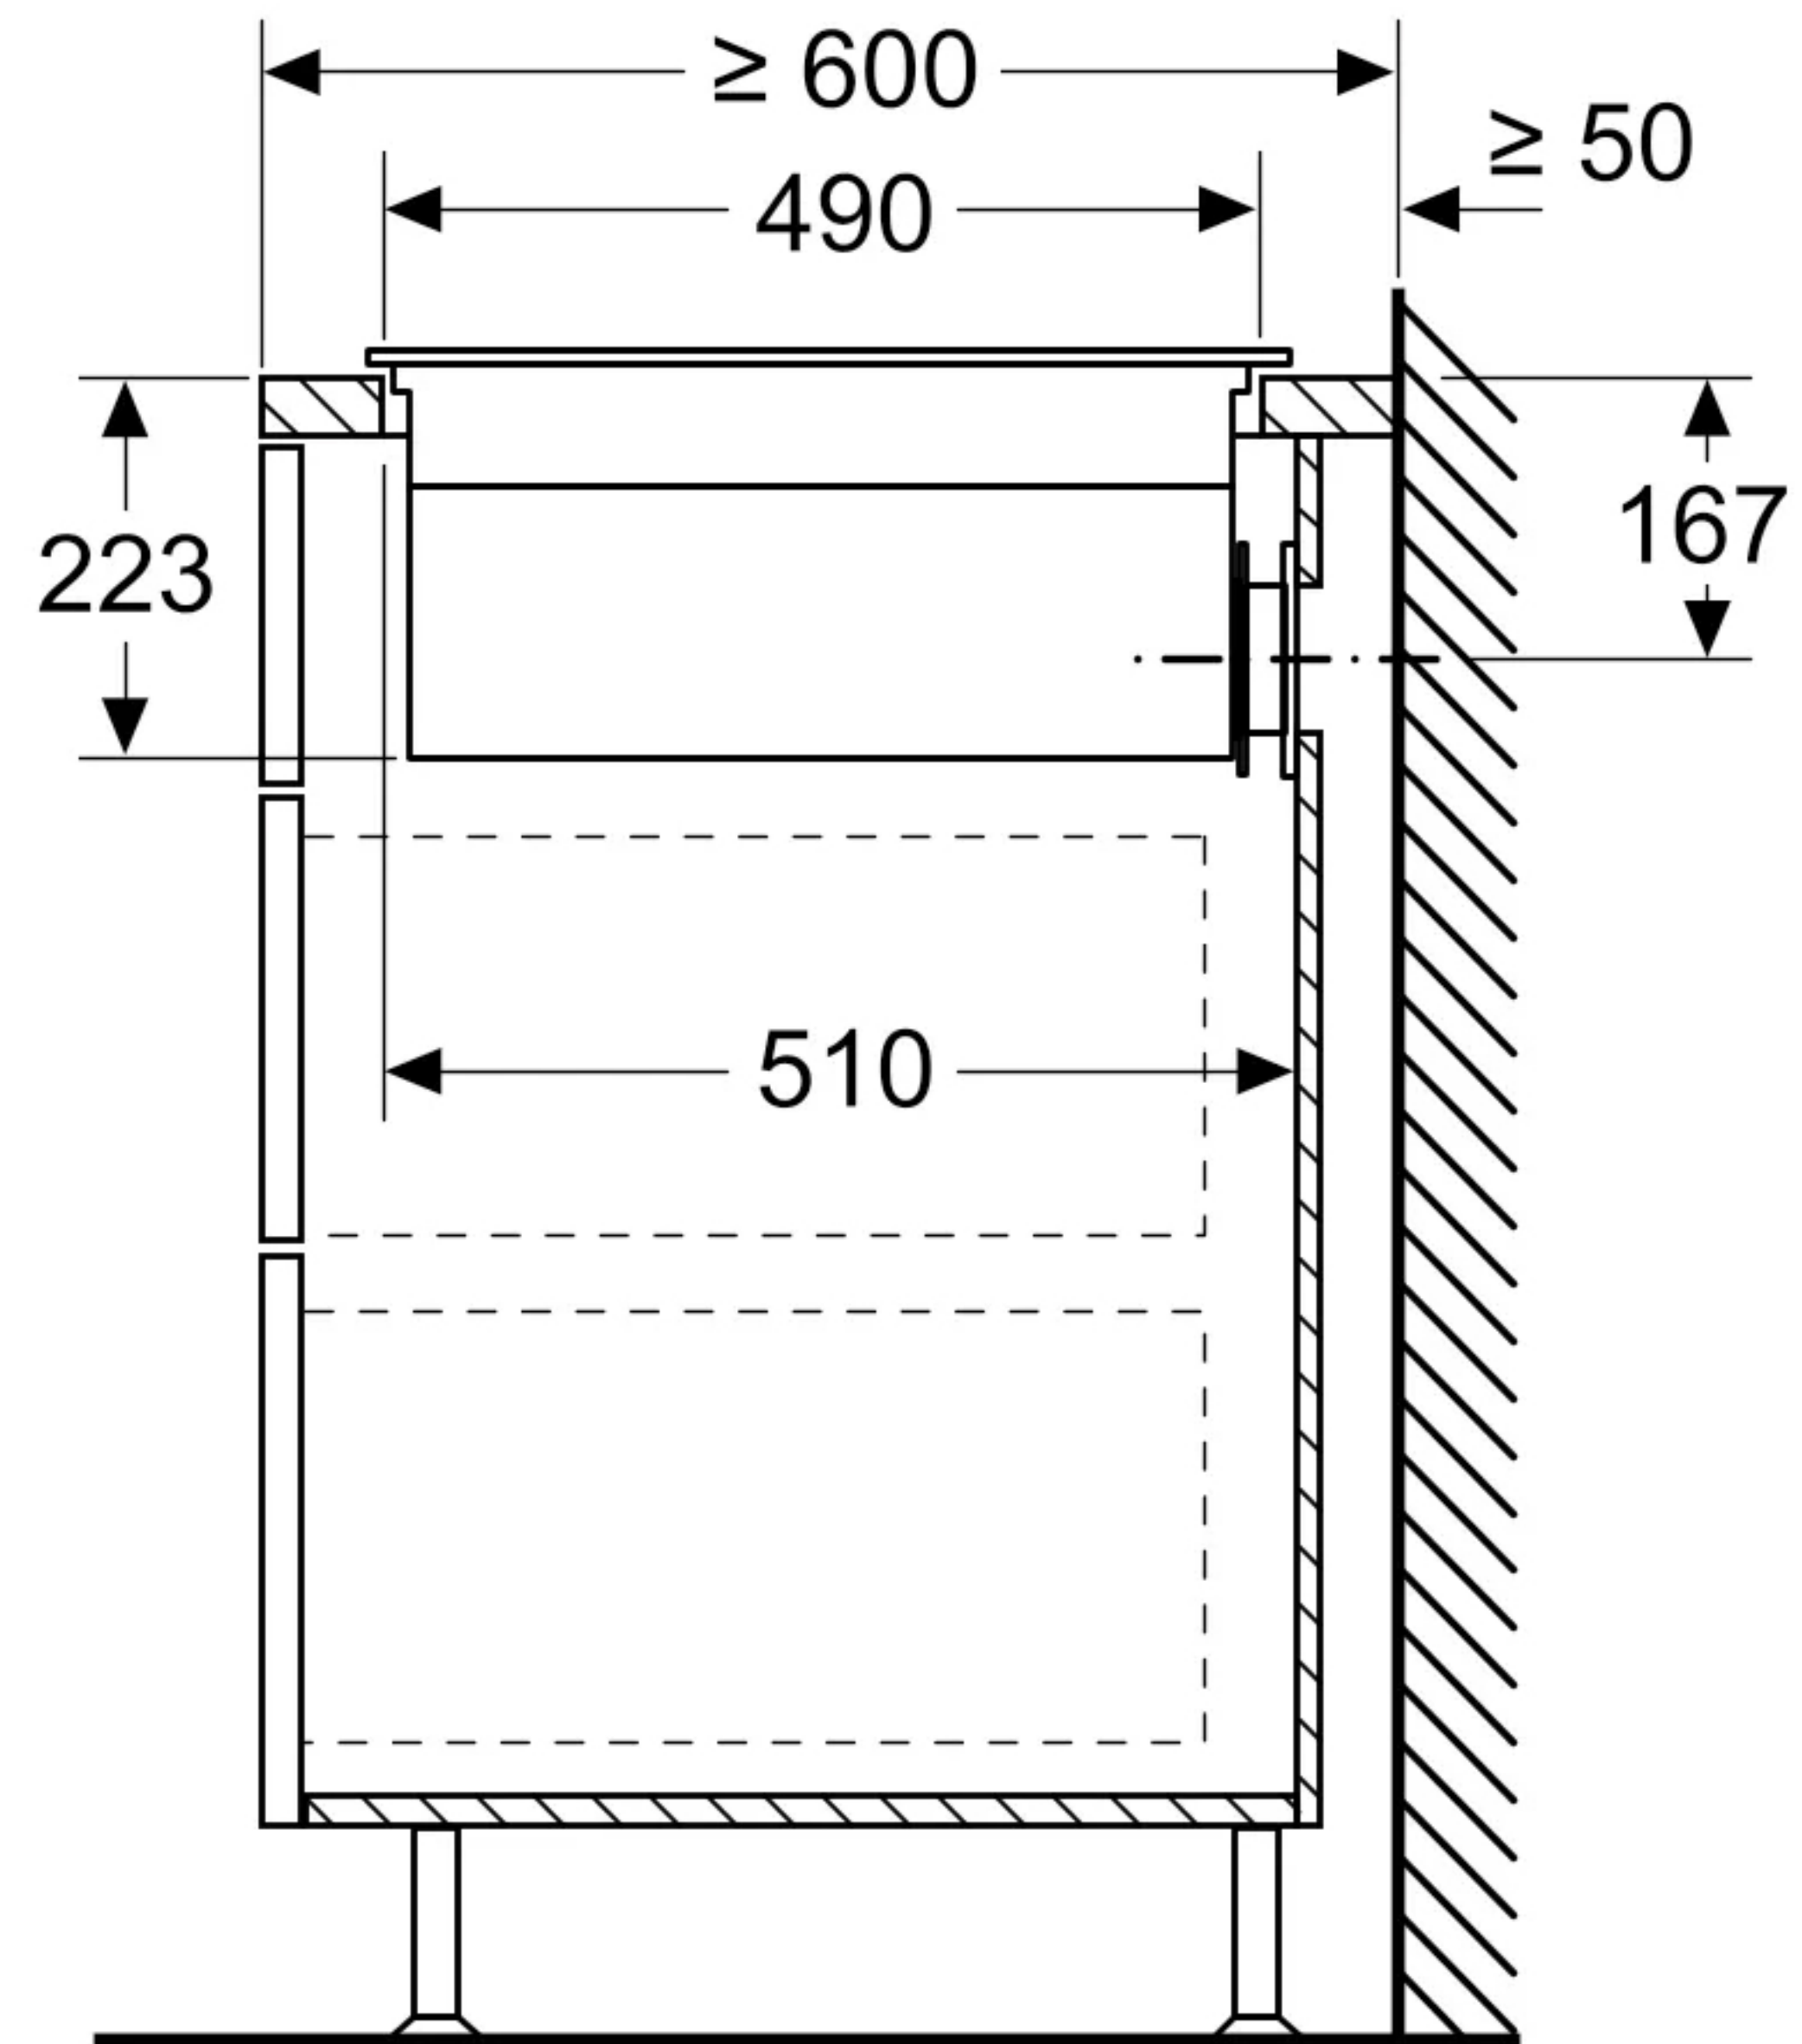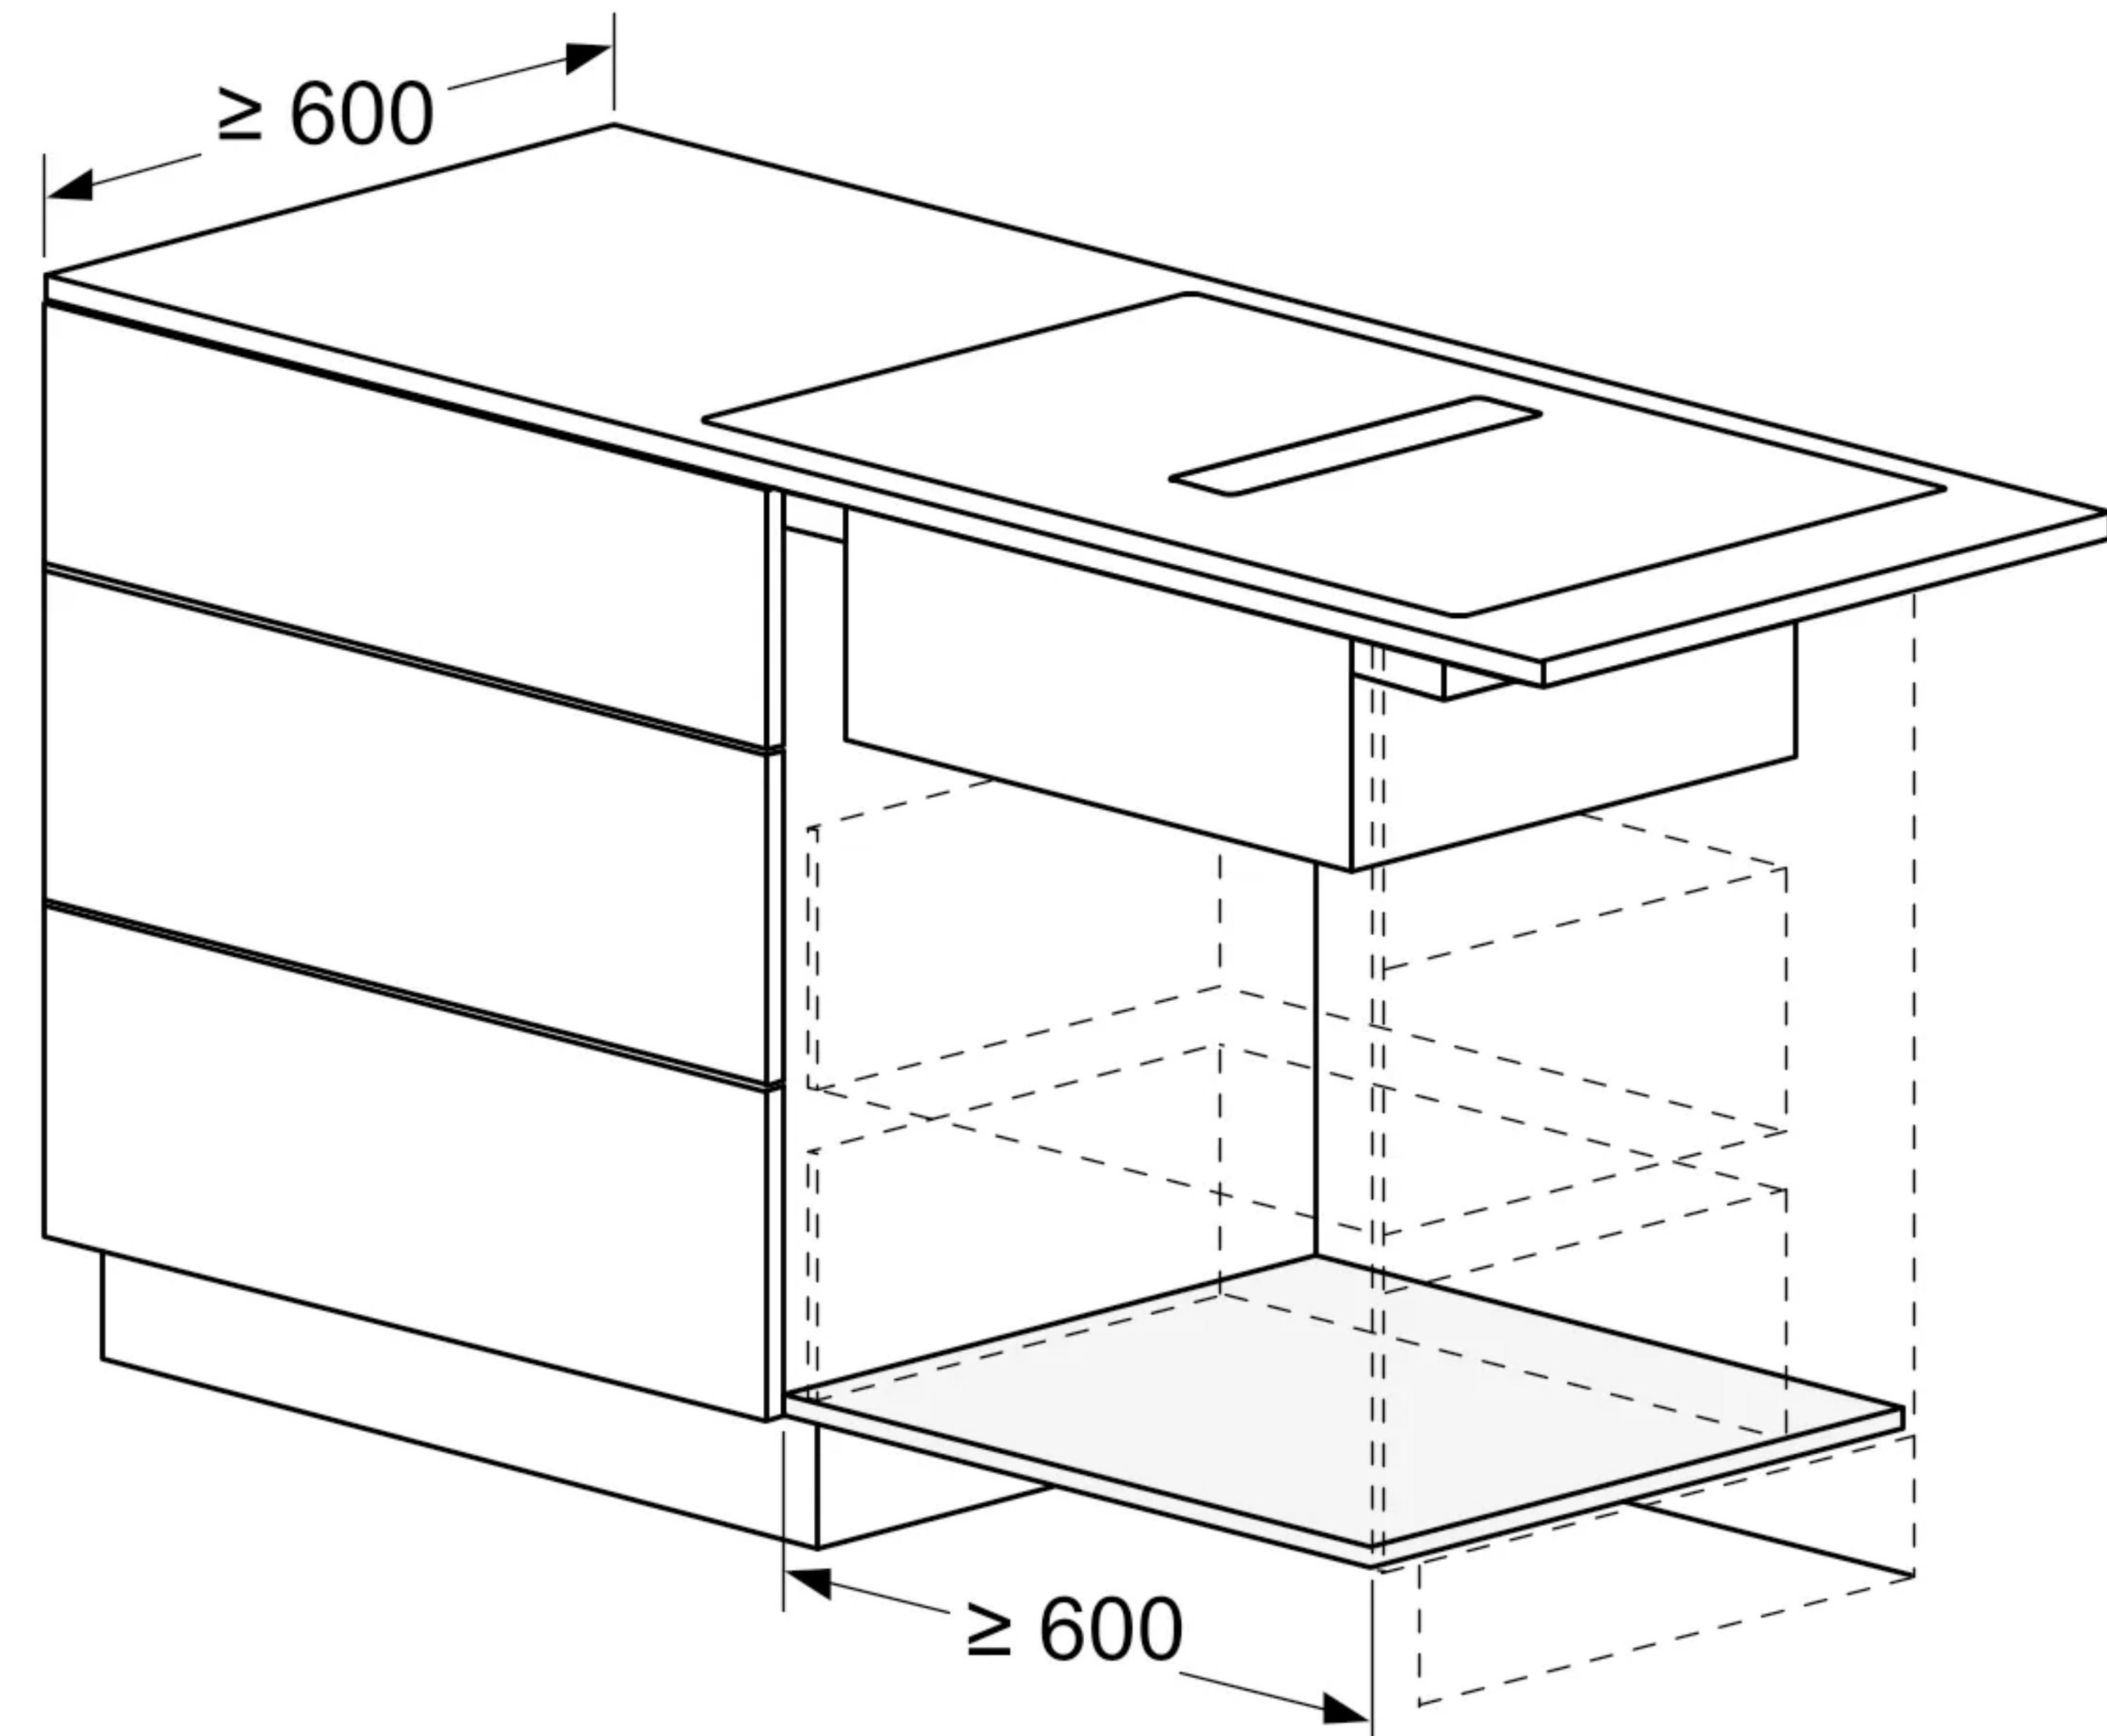

measurements in mm

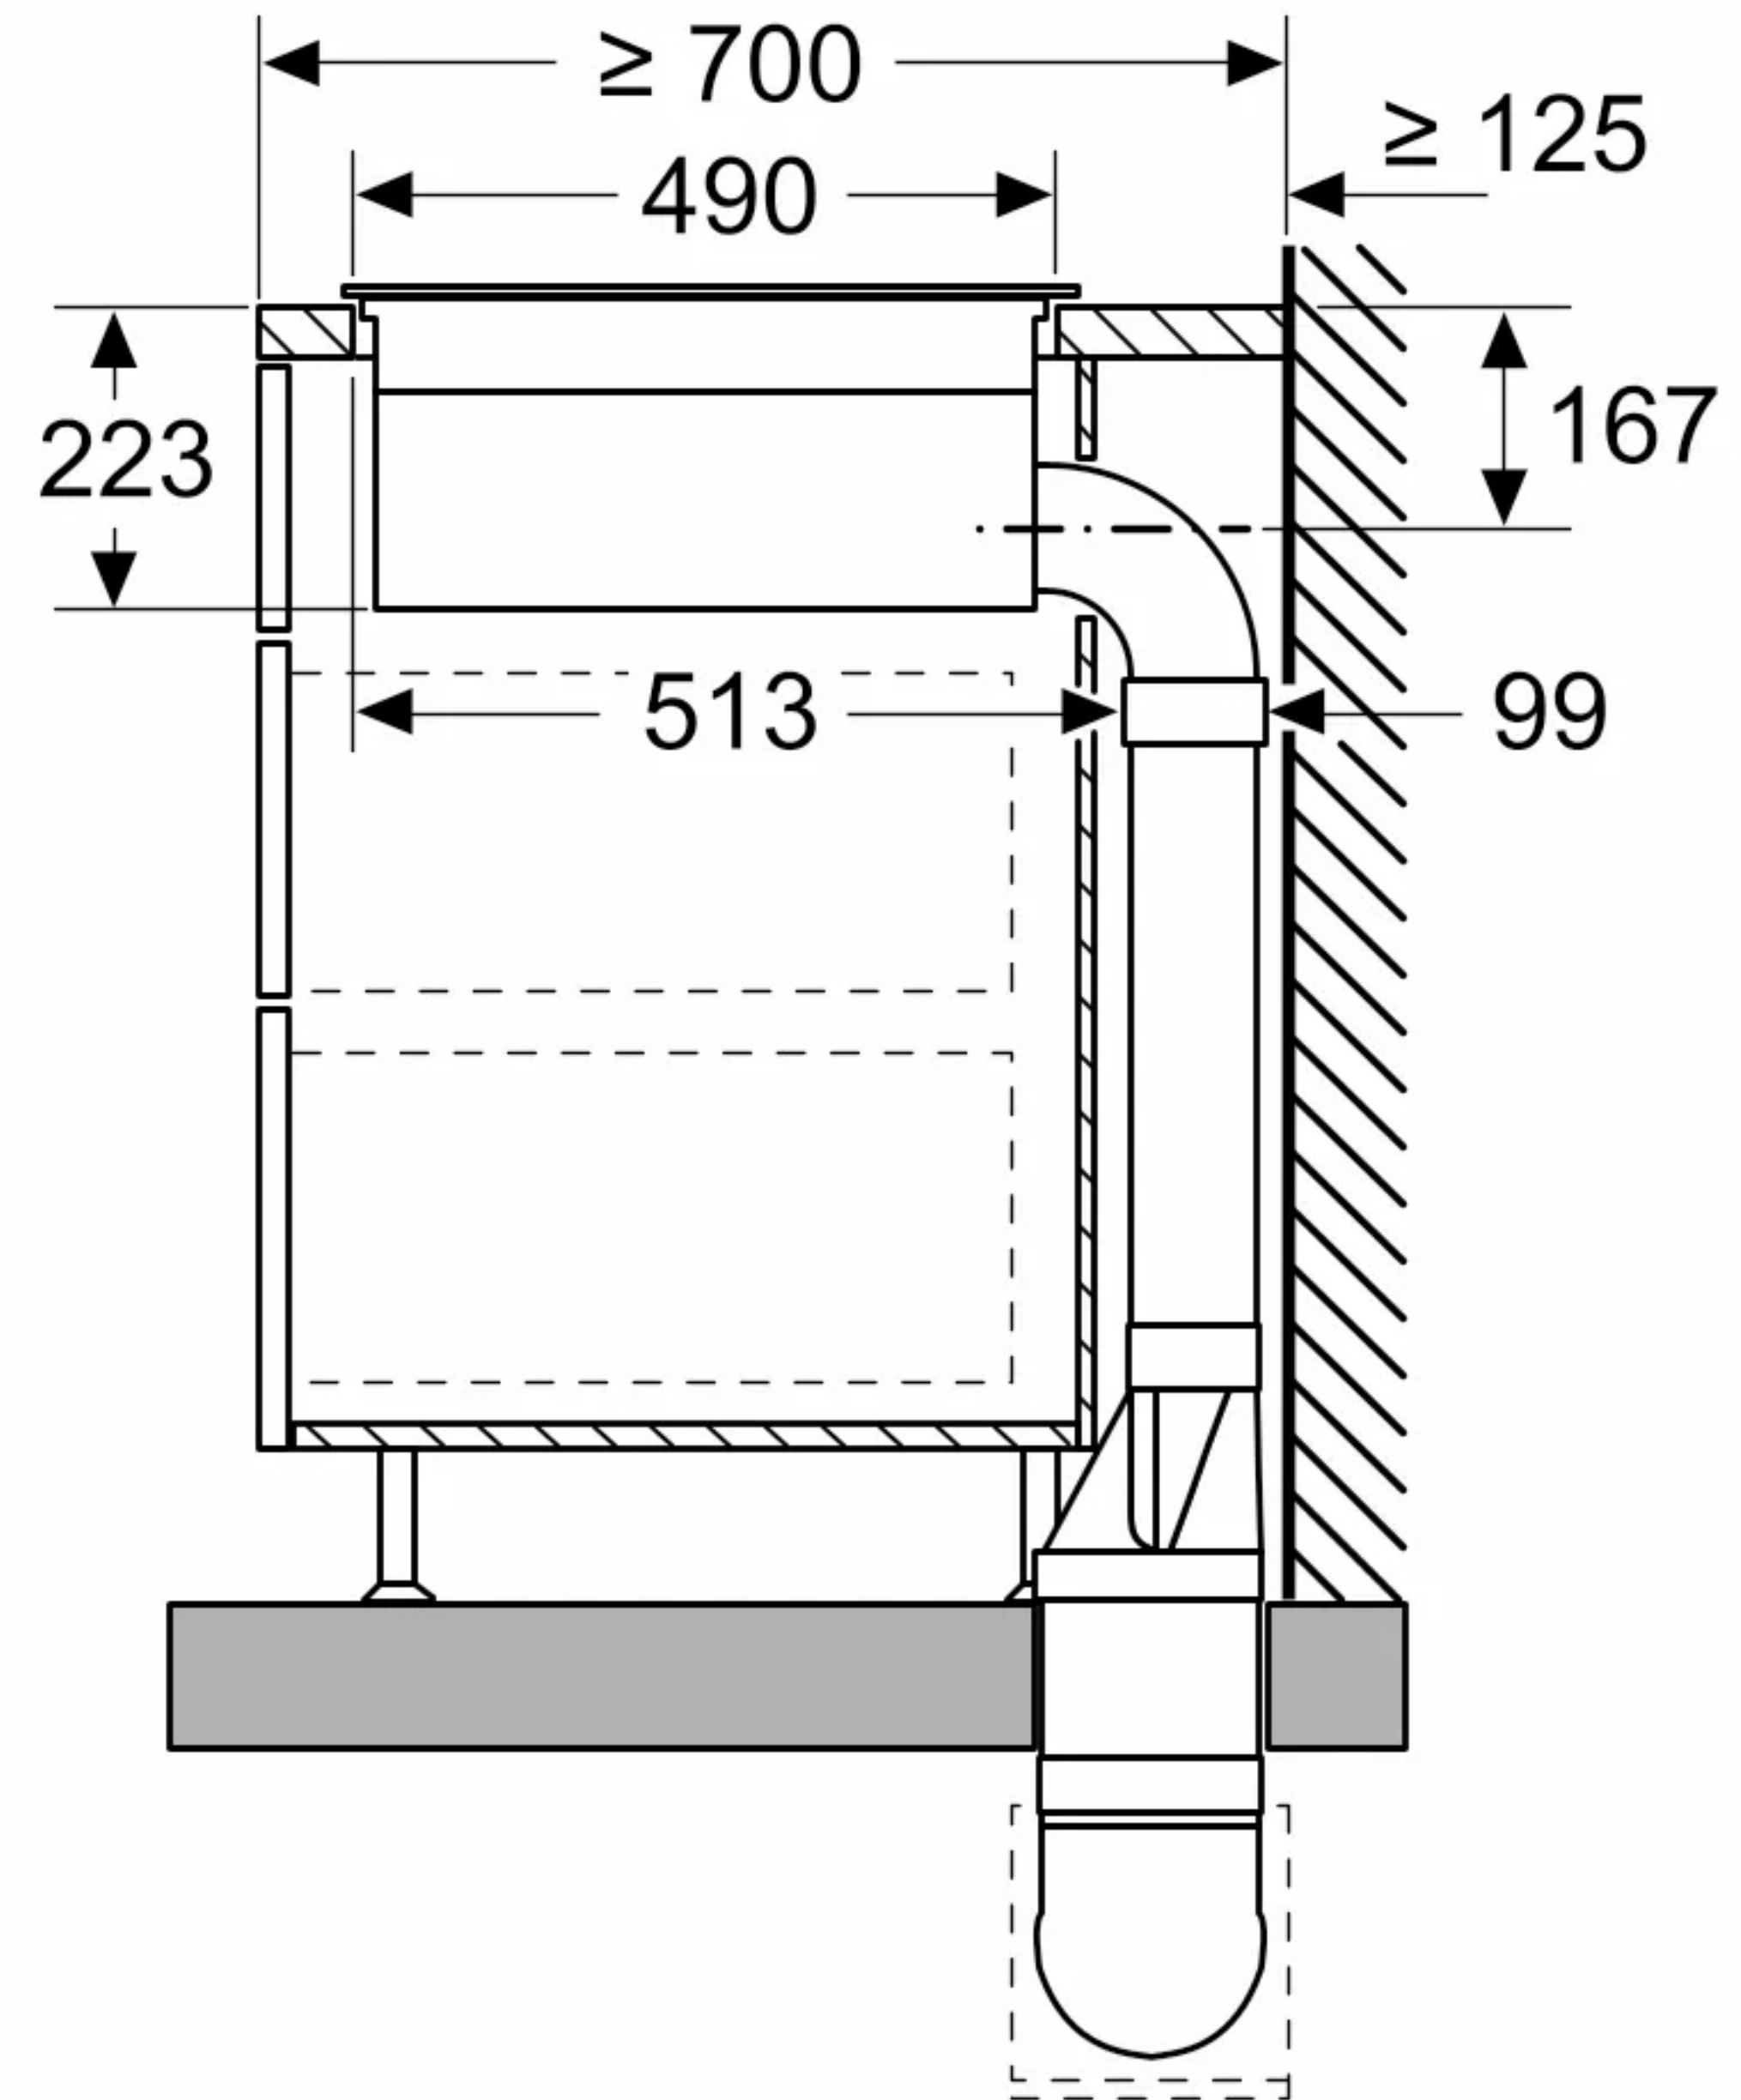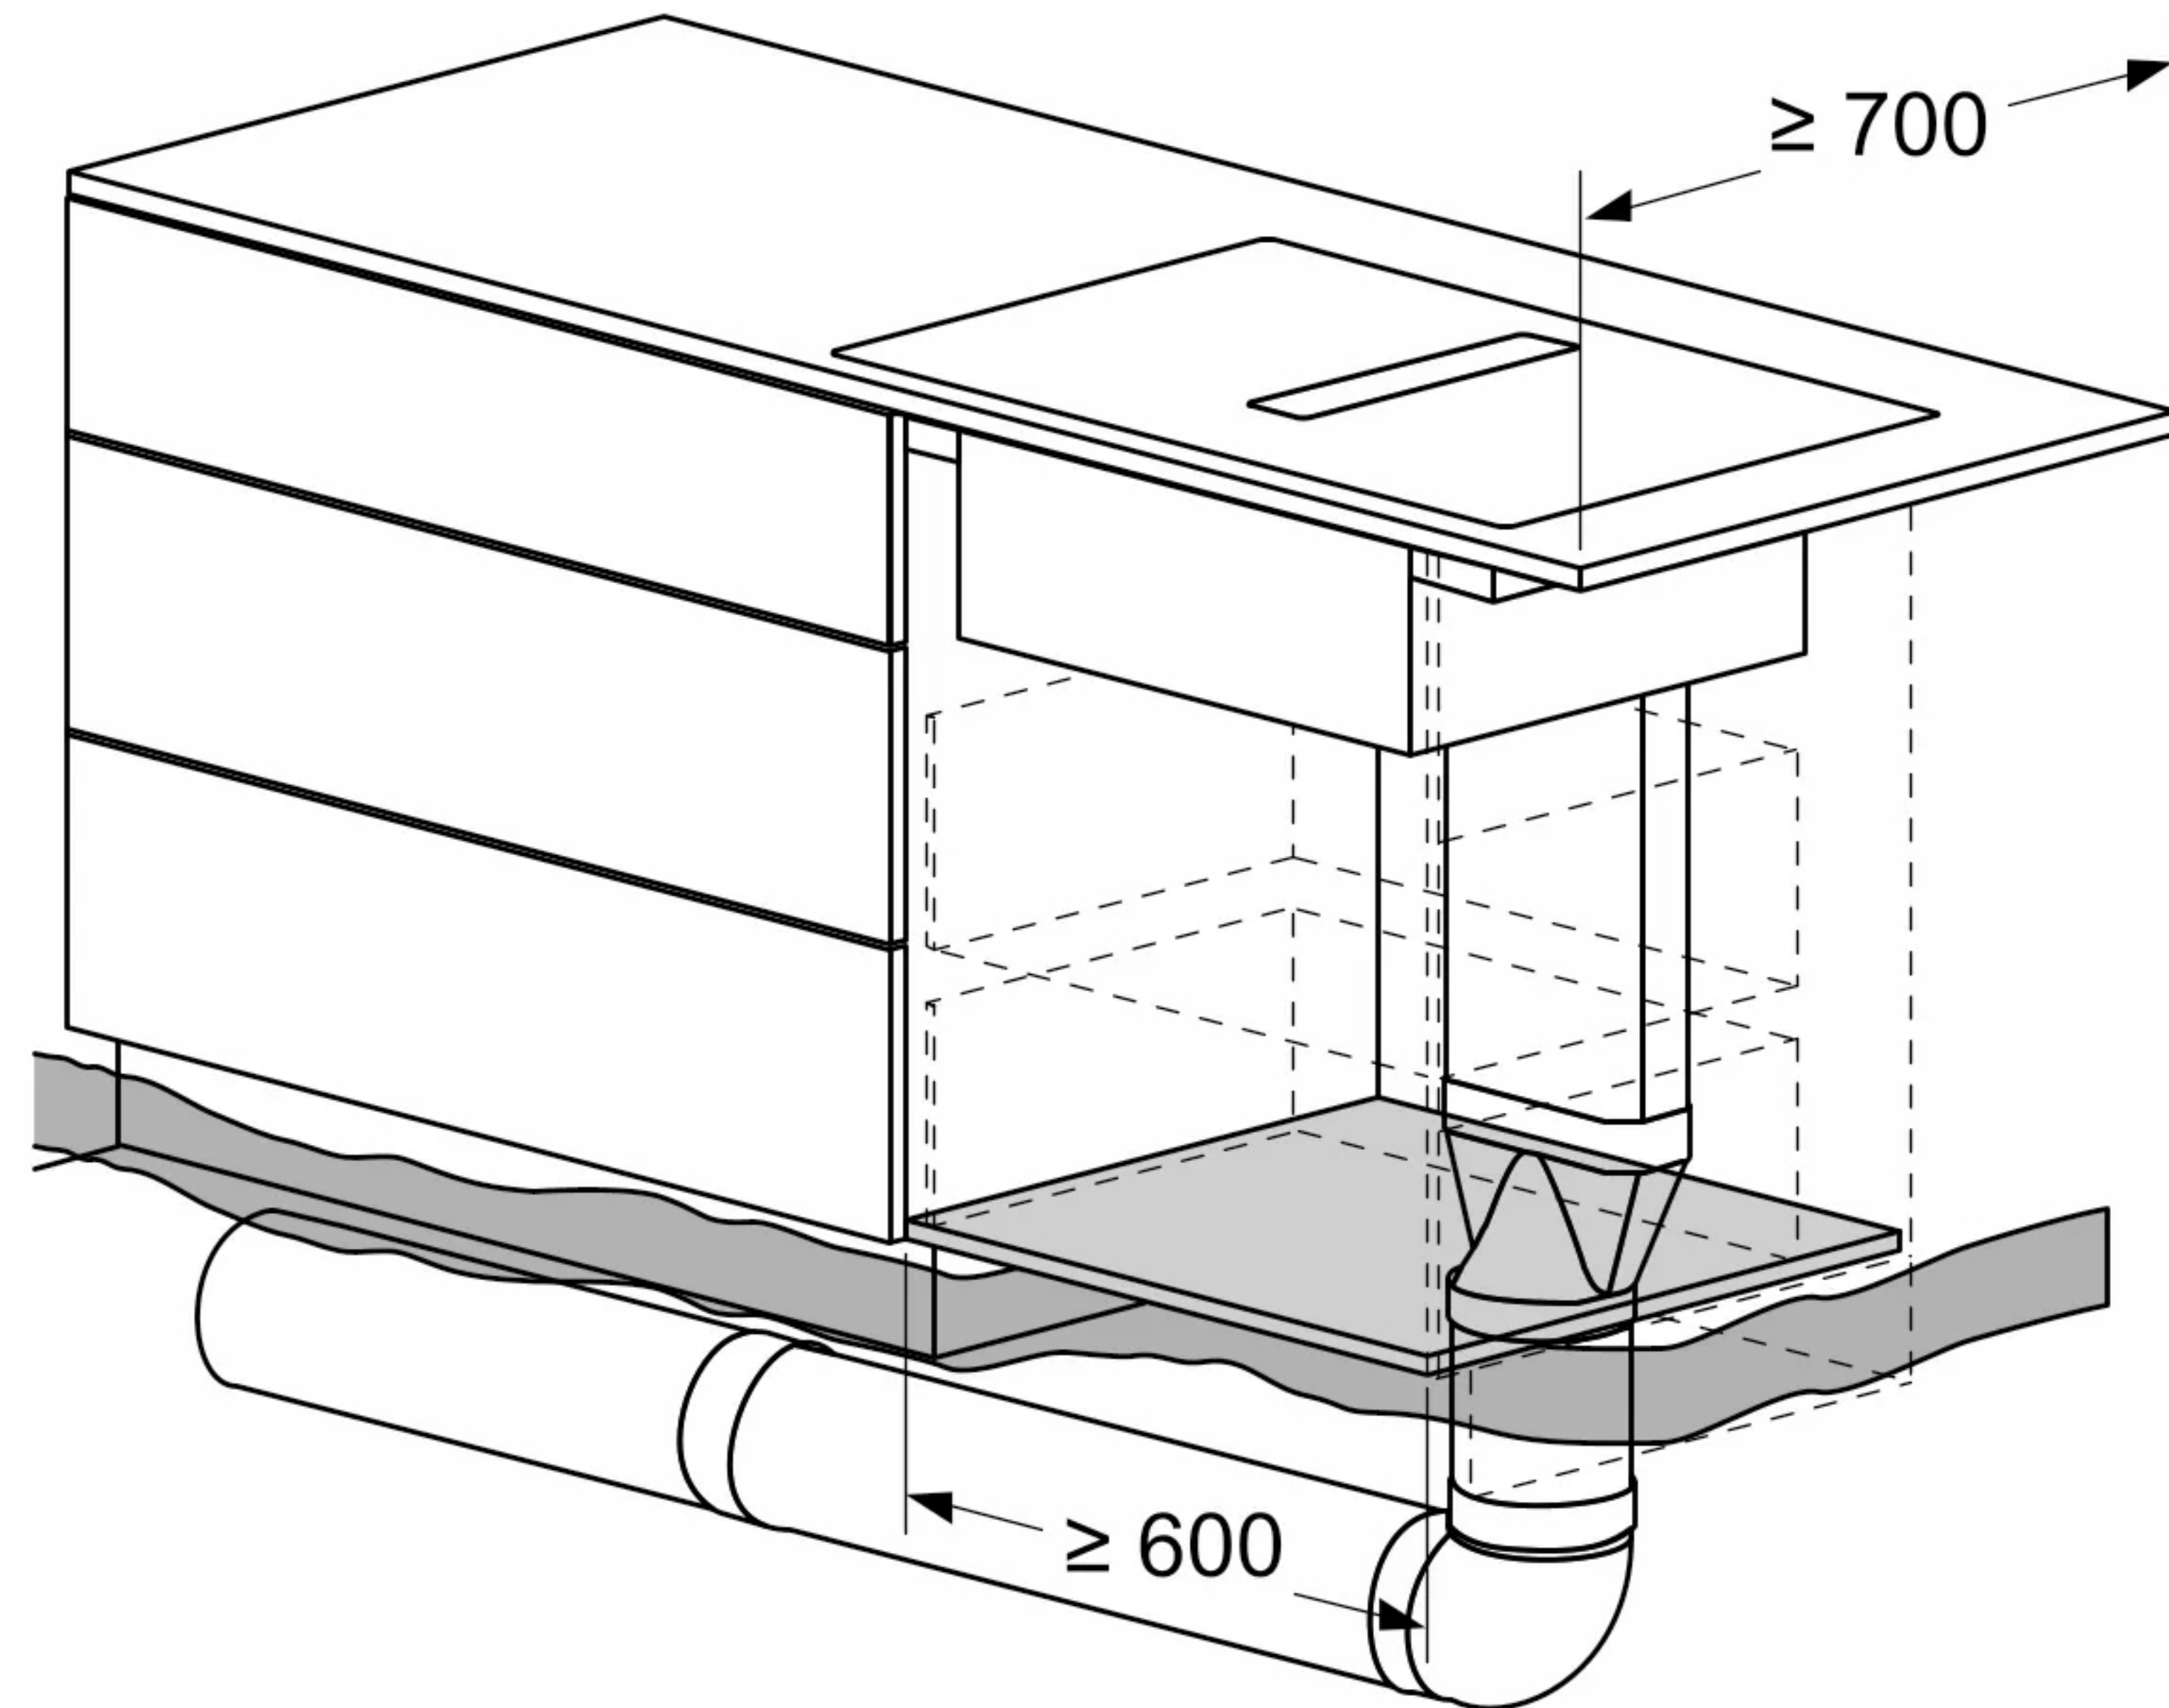


Measurements in mm

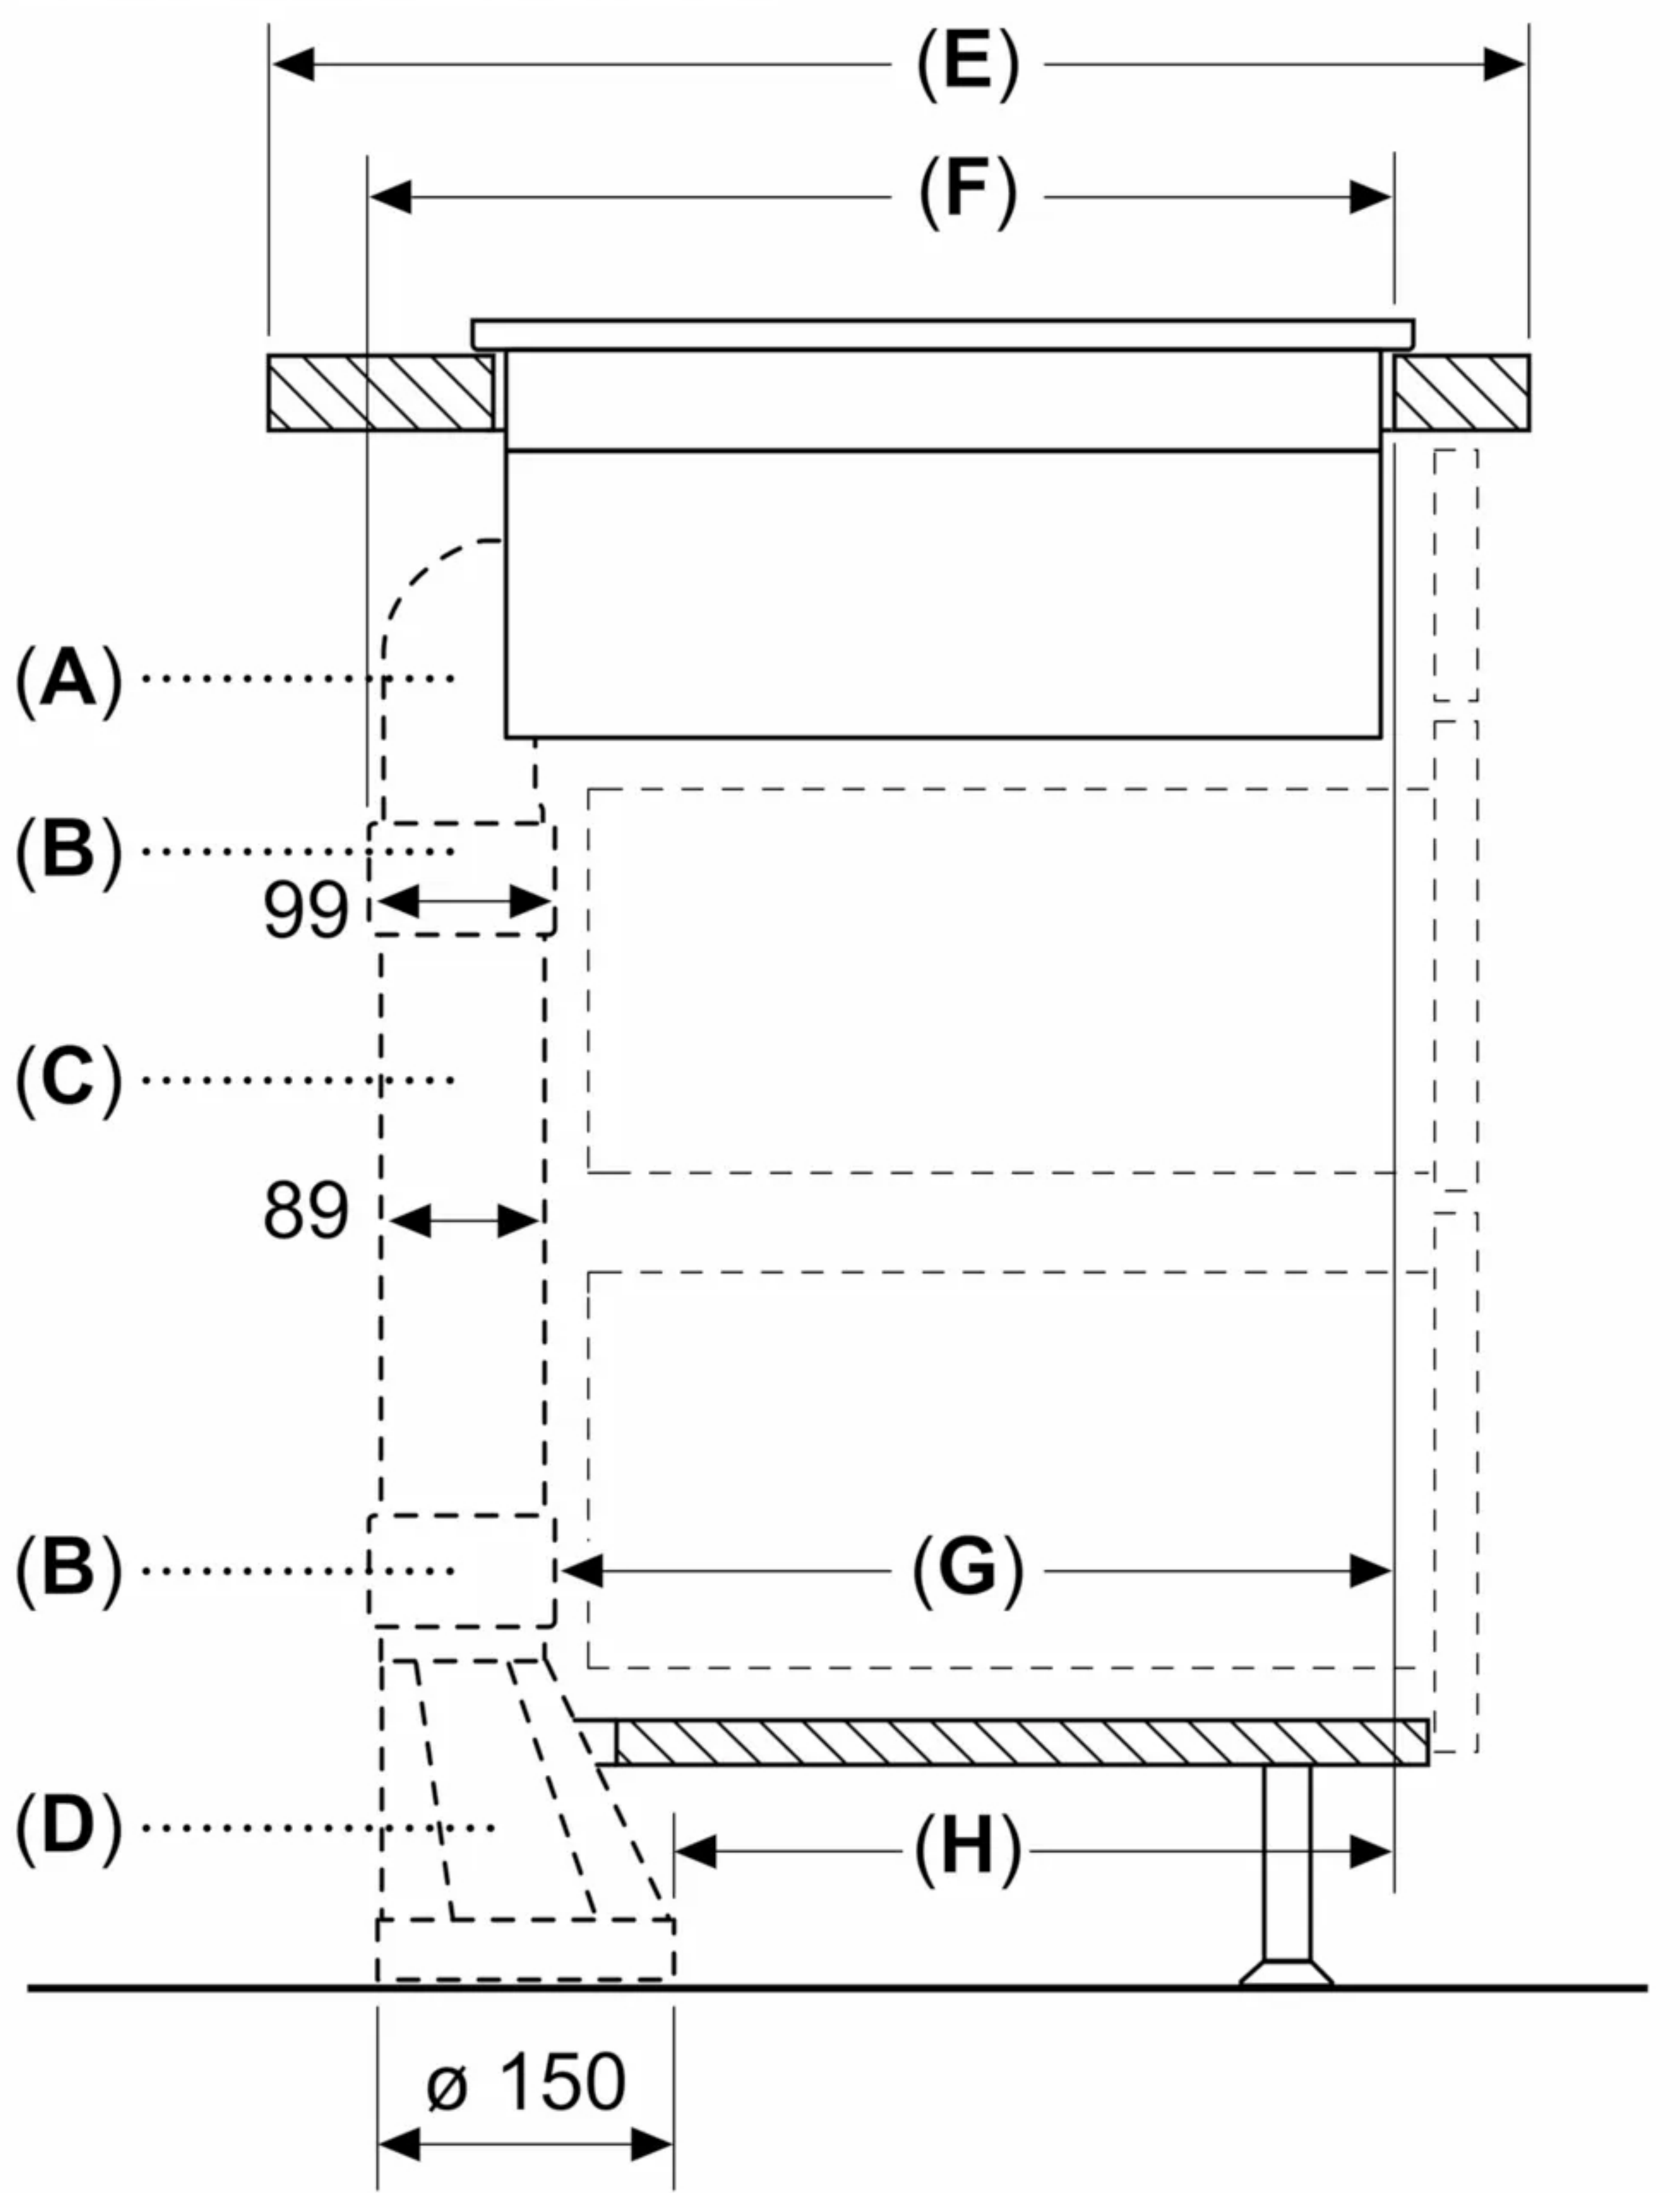


A	E	F	G	H
S-size	≥ 600	547	451	389
M-size	≥ 650	574	475	413
L-size	≥ 700	612	515	453

- A:** 90° Bow
B: Connector sleeve
C: Straight tube
D: Straight adapter round-flat

measurements in mm
Front view – unit cut-out
for unducted recirculation

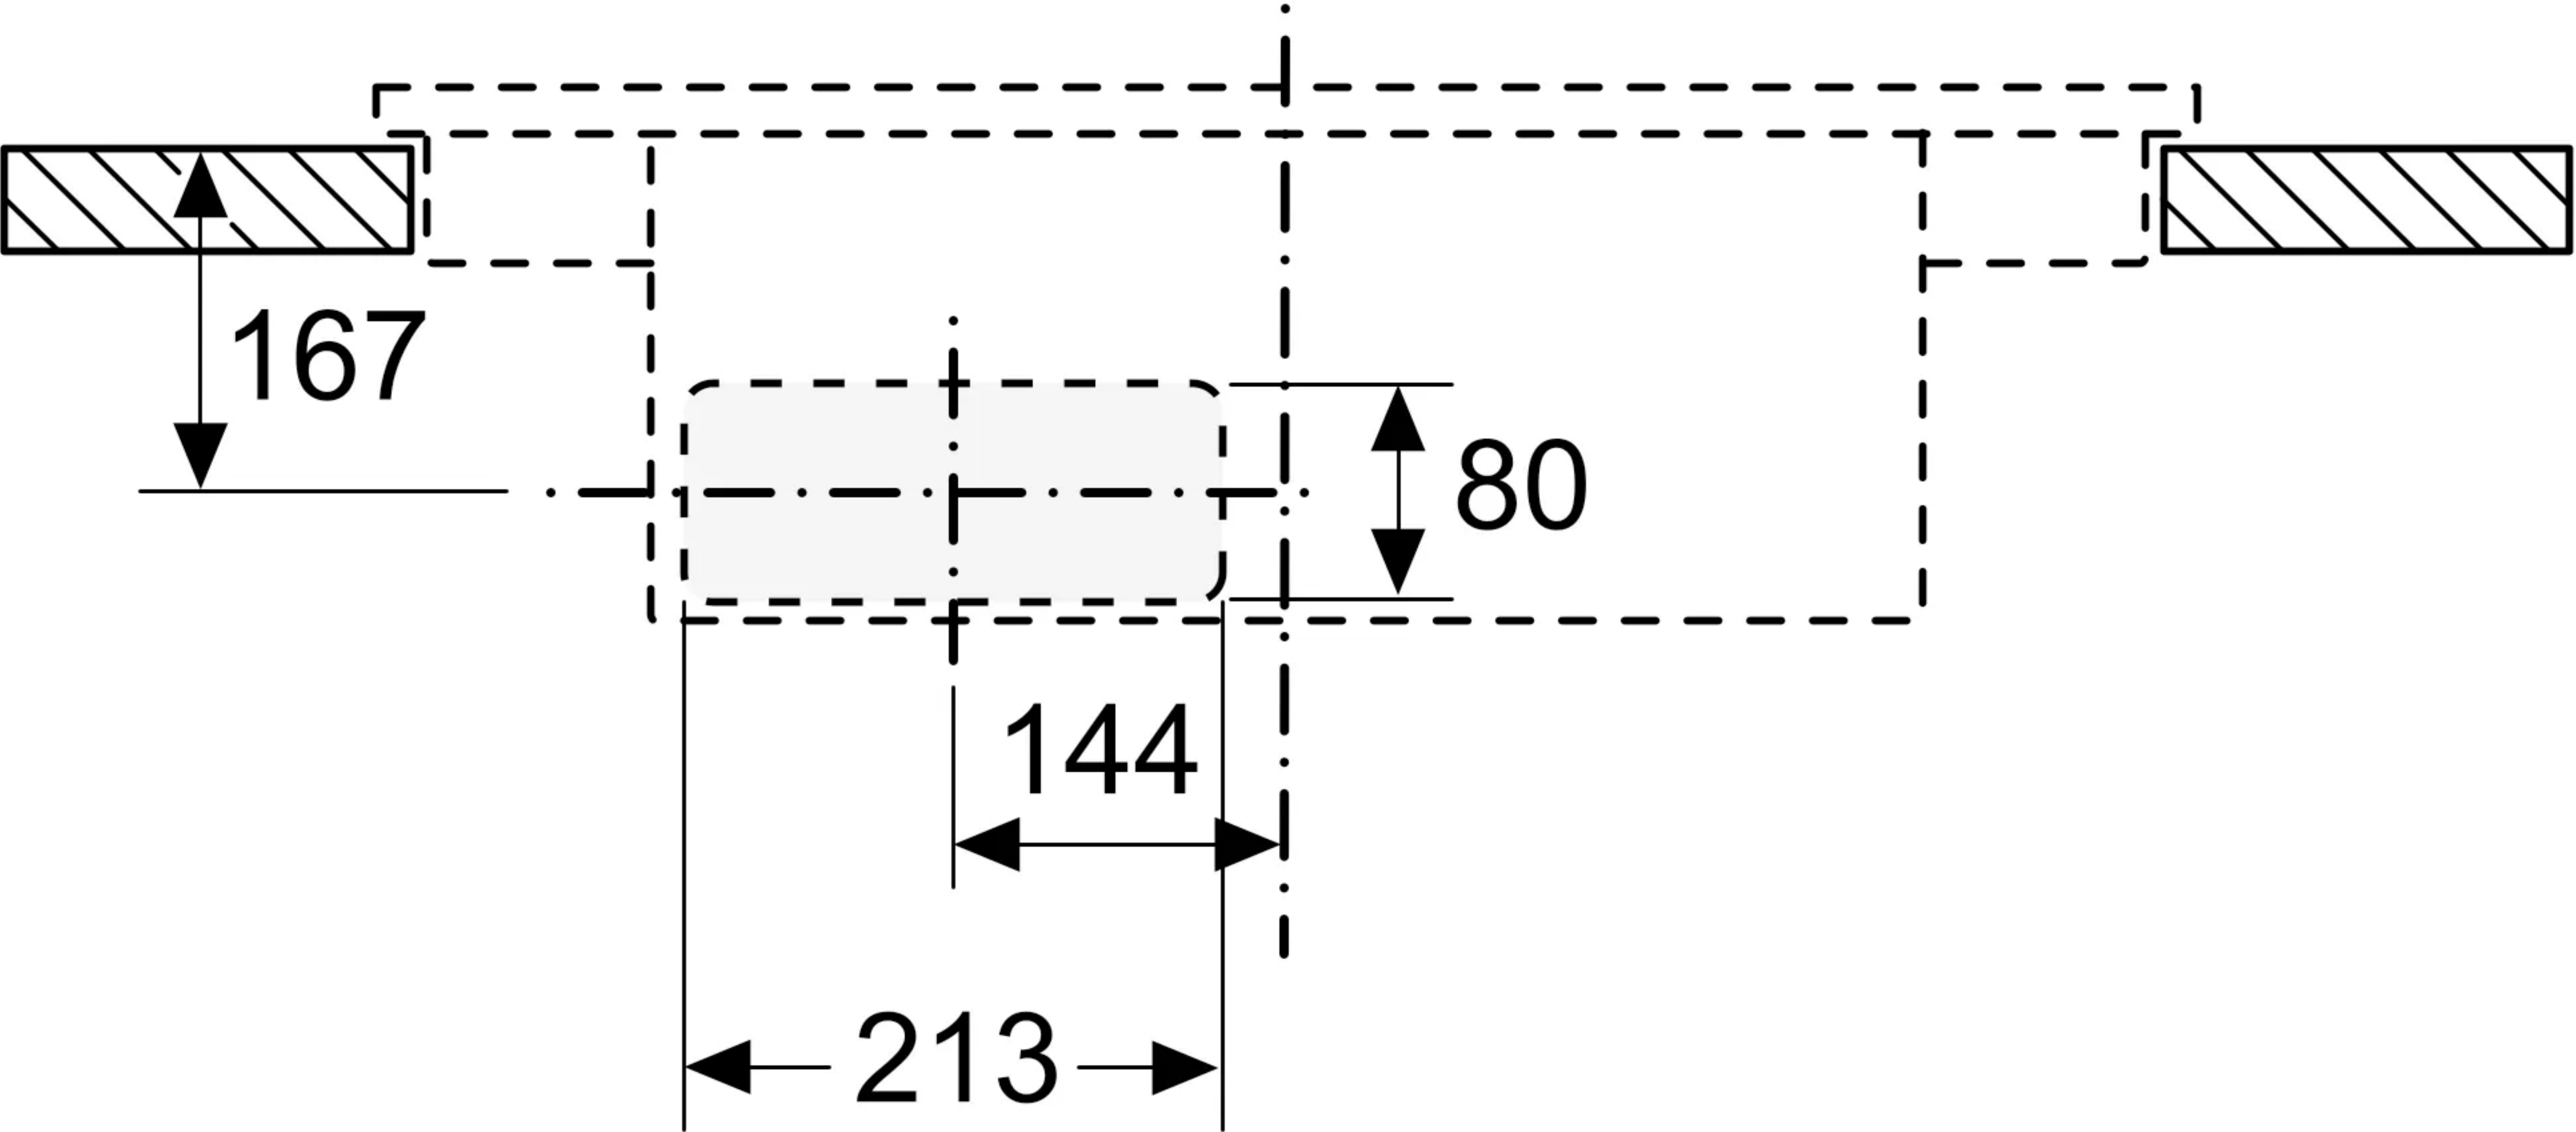

Measurements in mm

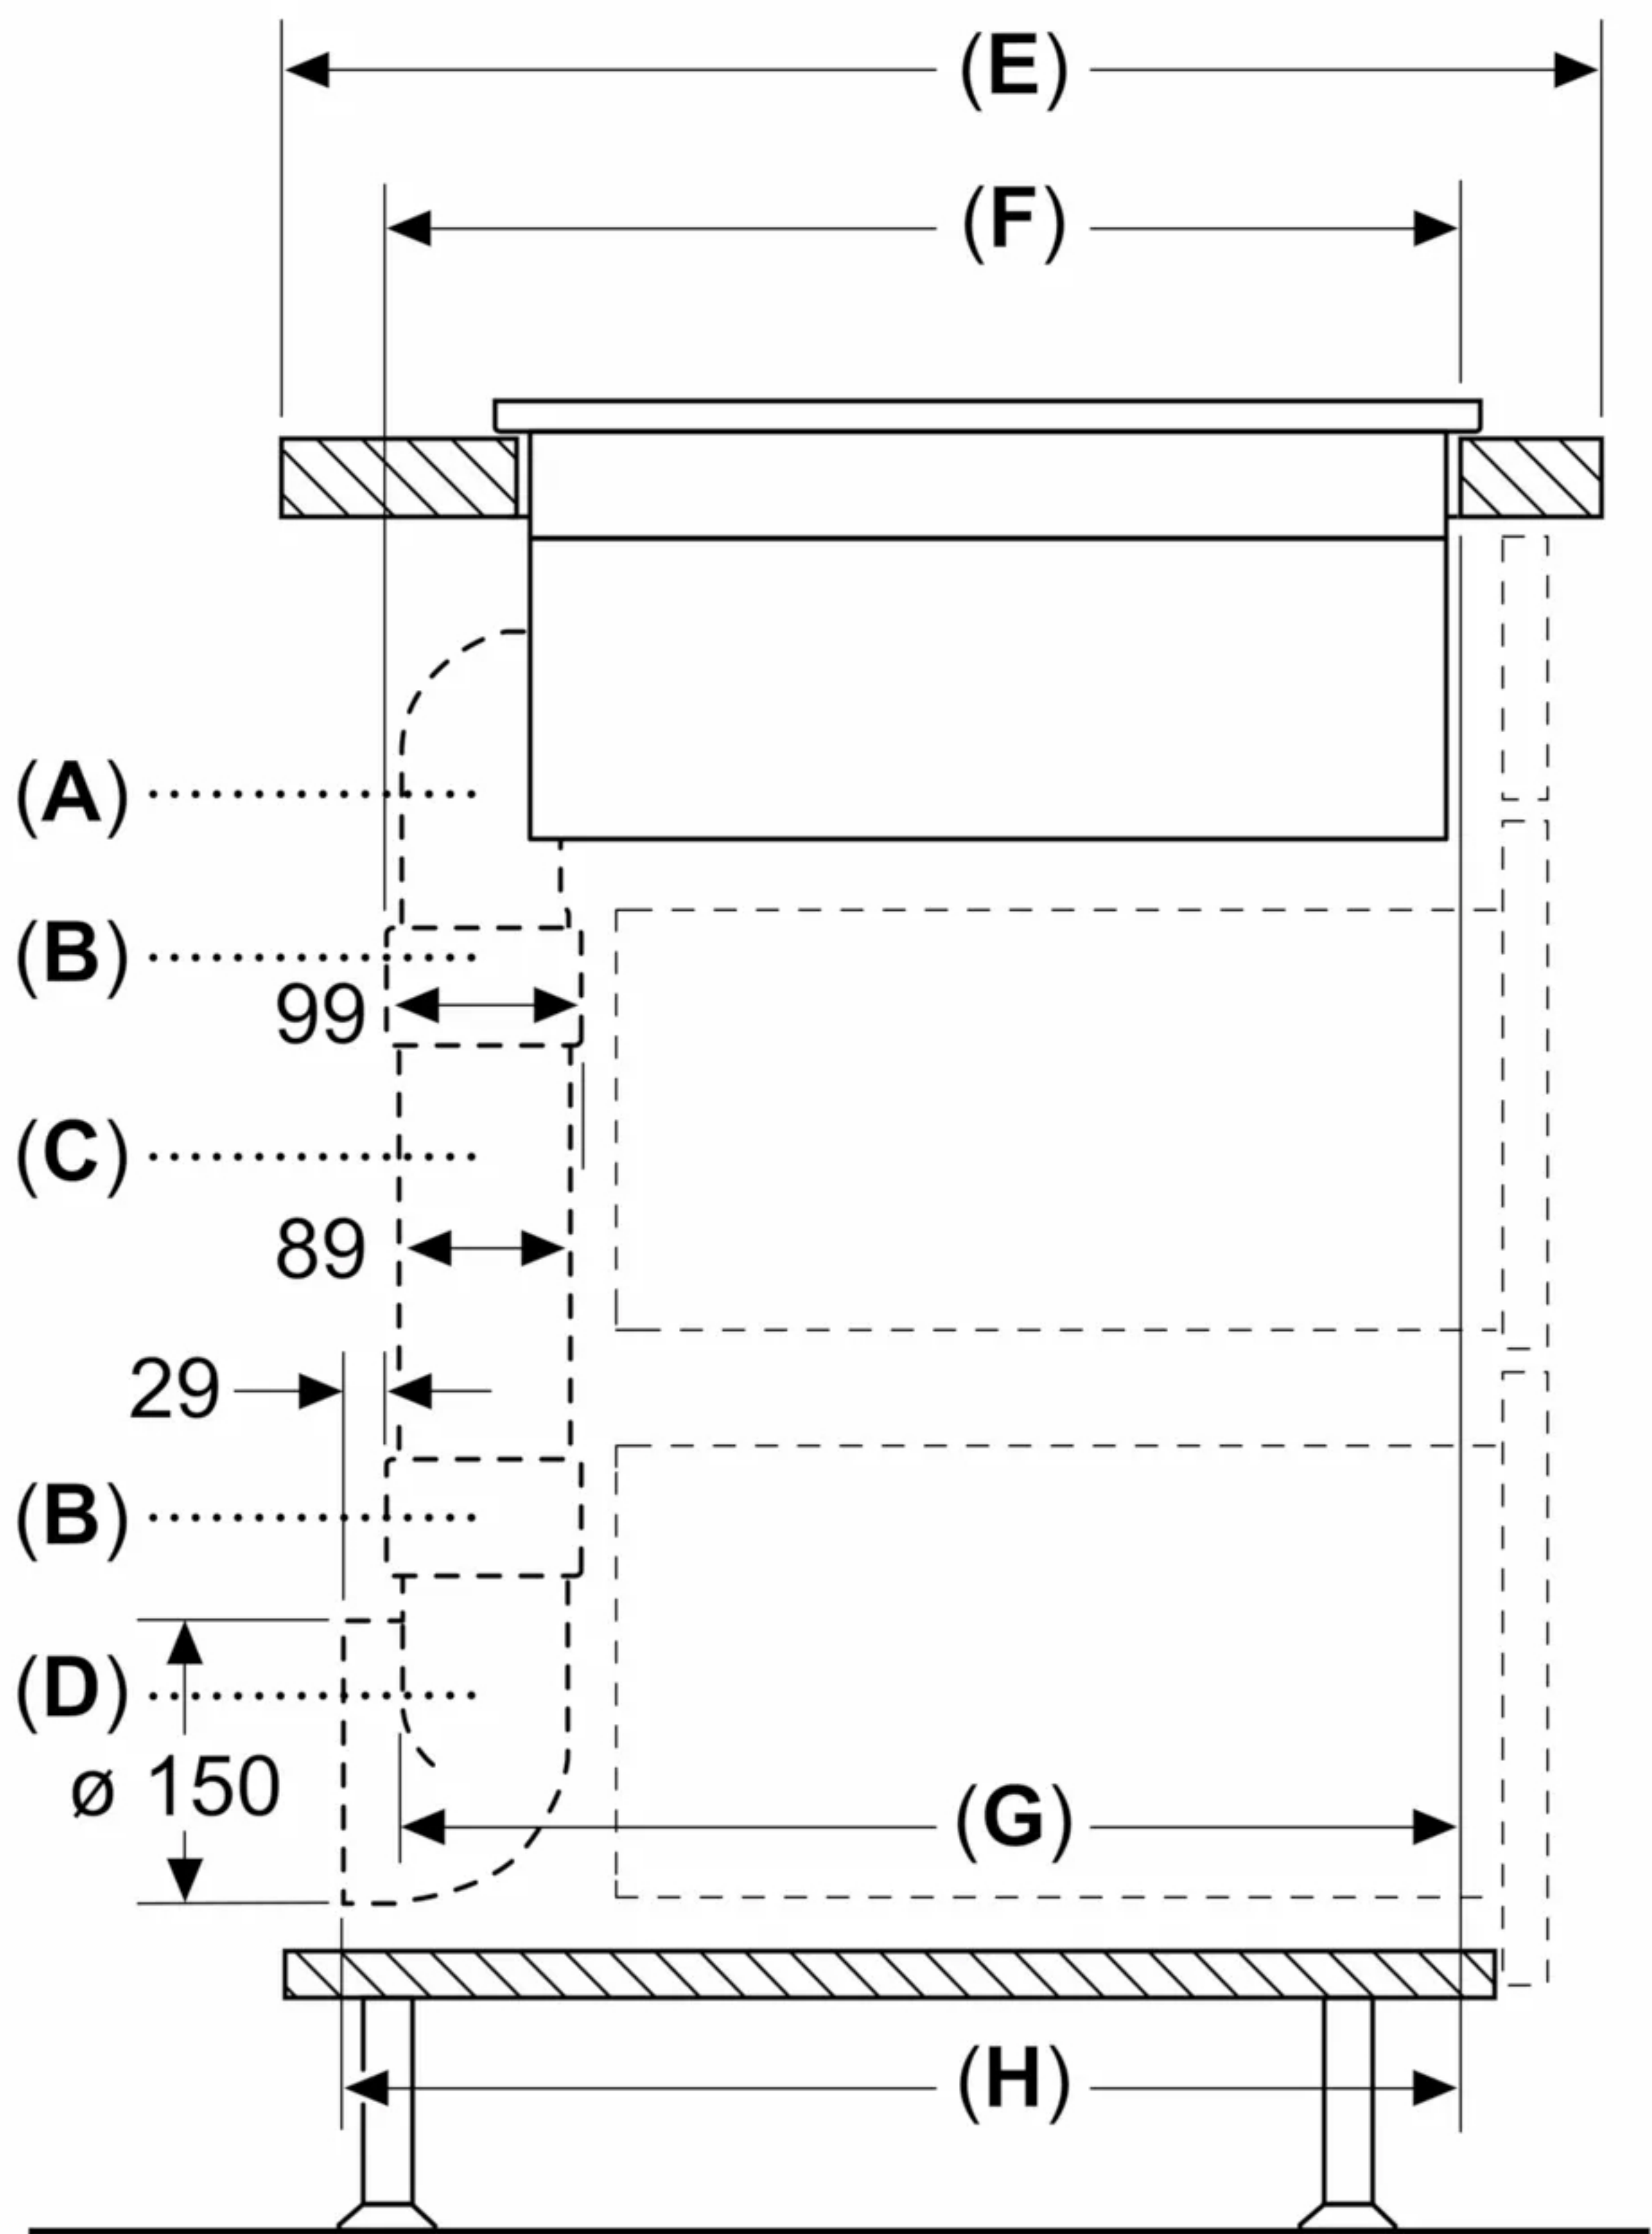


A	E	F	G	H
S-size	≥ 600	547	545	579
M-size	≥ 650	574	569	603
L-size	≥ 700	612	609	643

- A:** 90° Bow
B: Connector sleeve
C: Straight tube
D: 90° Adapter round-flat

measurements in mm

Side view

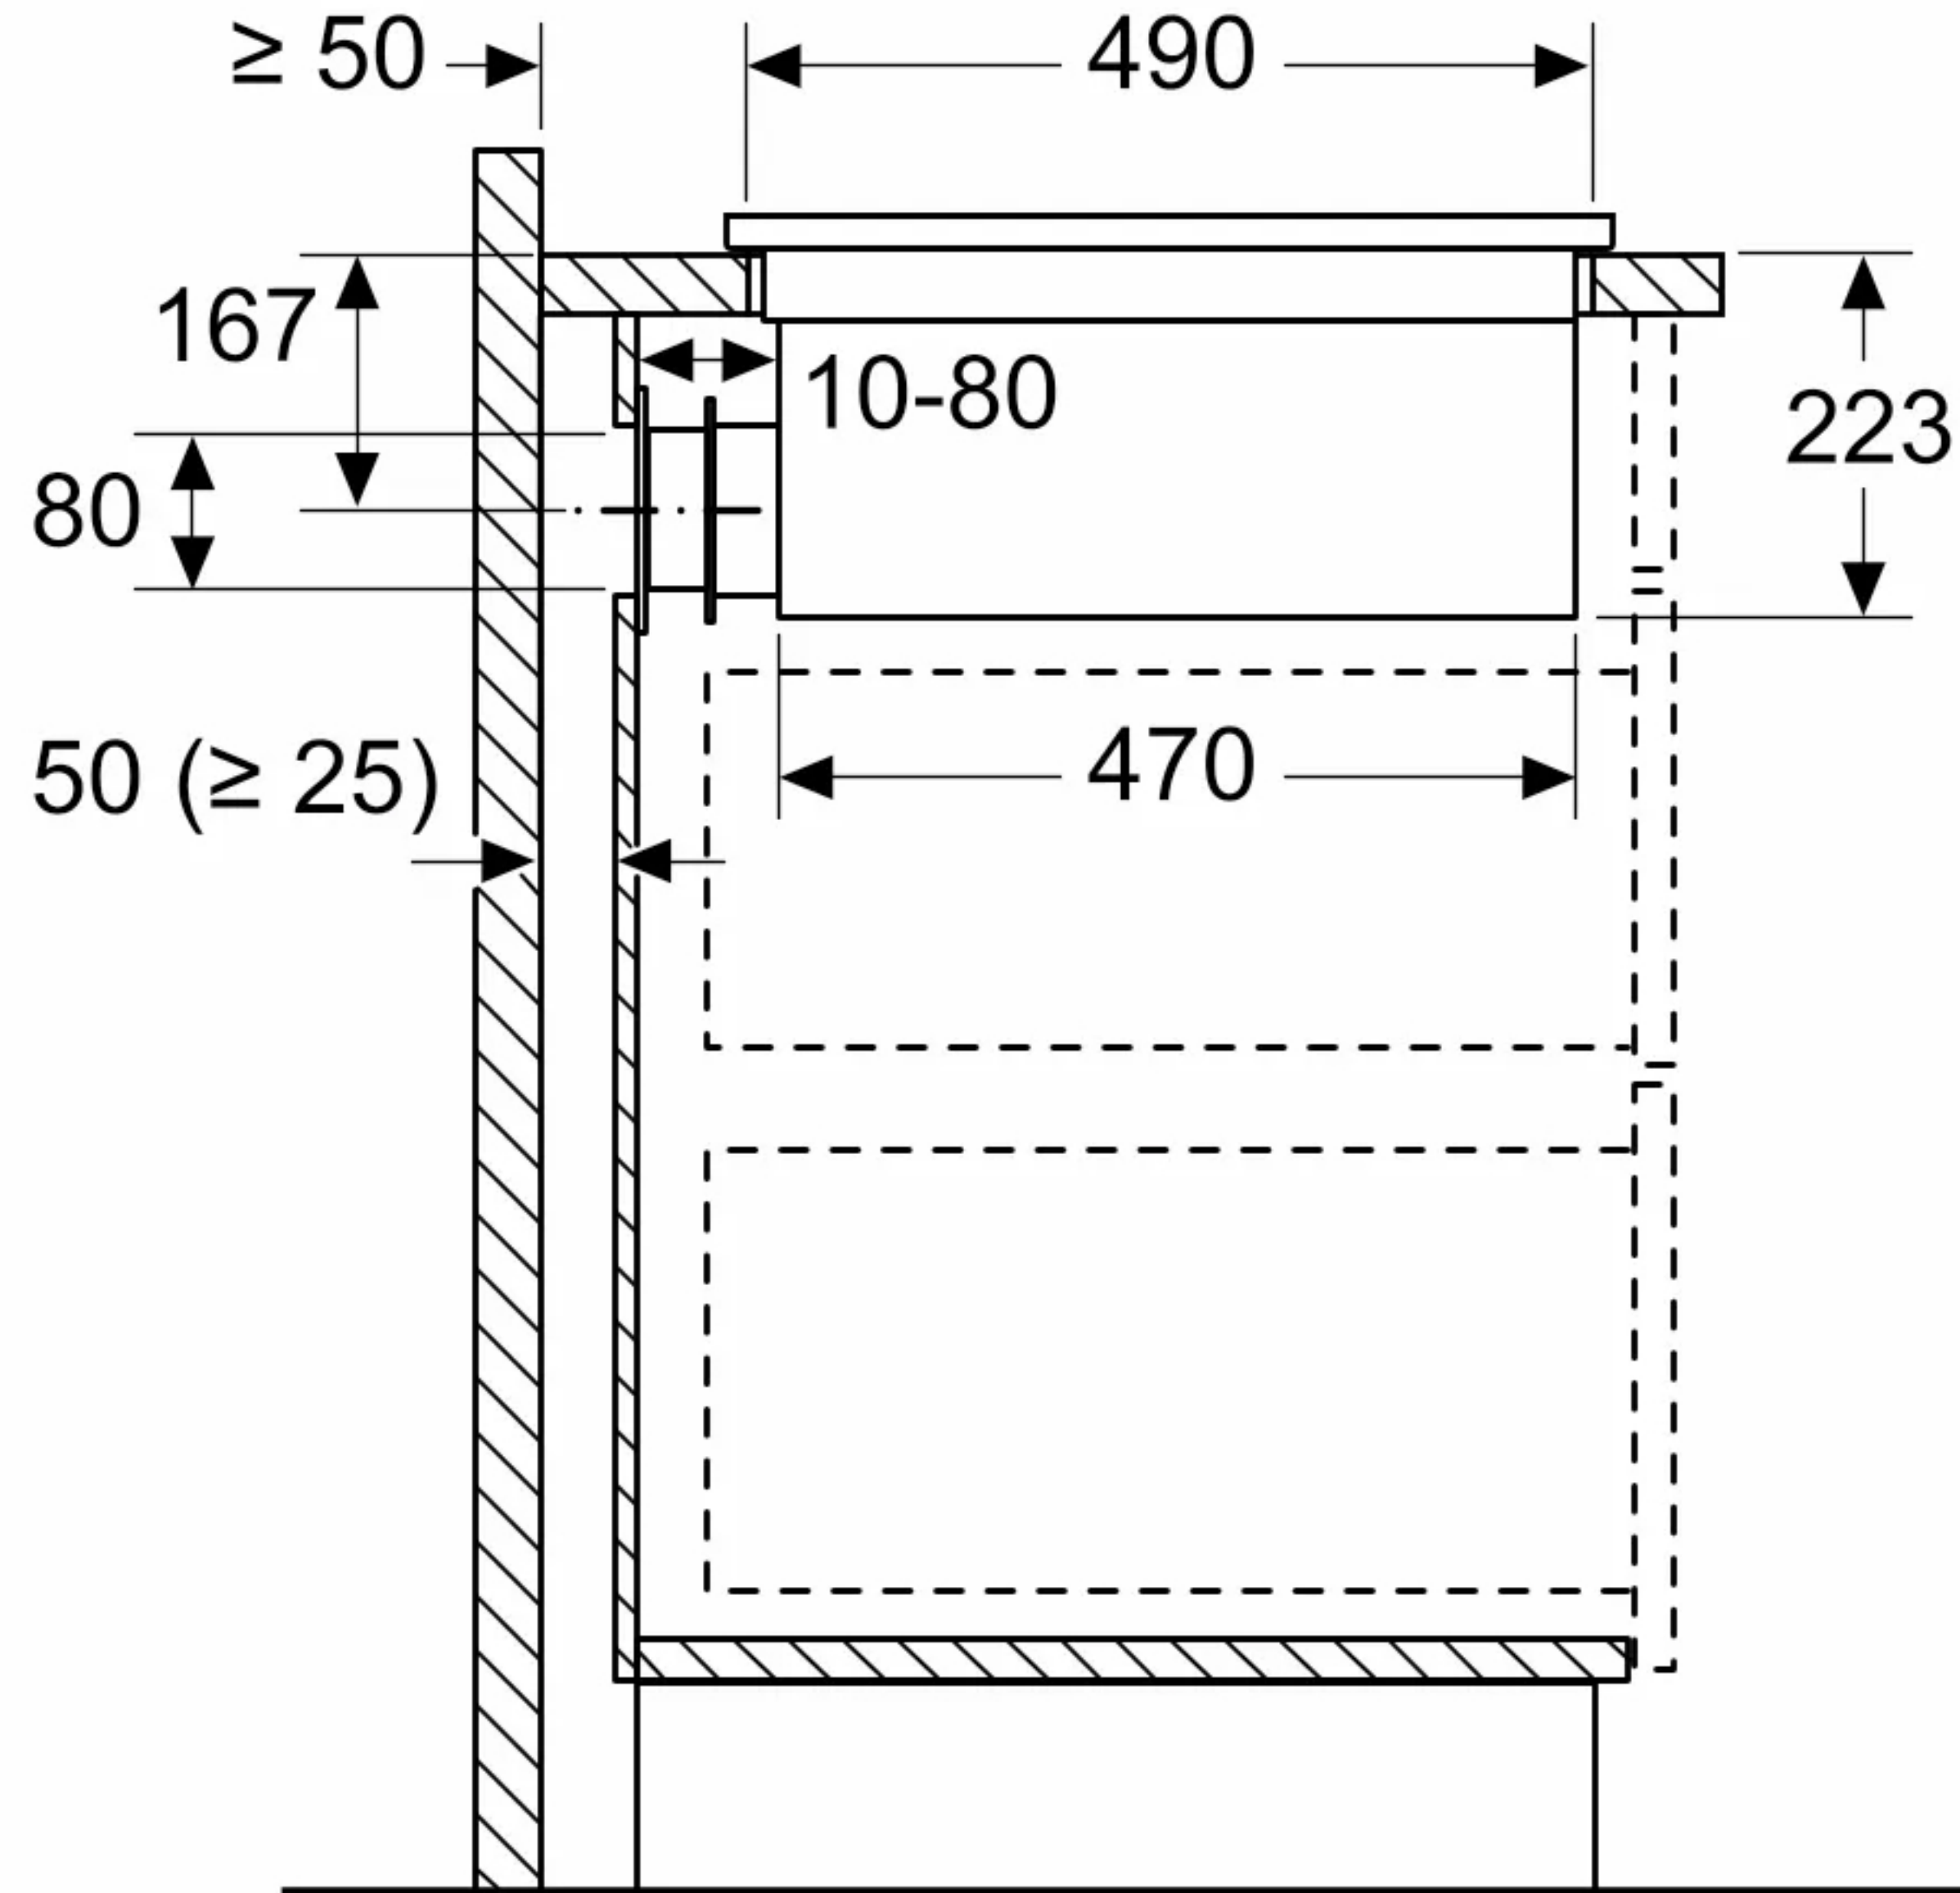

When installing directly against outer walls that are not insulated ($\mu \geq 0.5 \text{ W/m}^2 \text{ } ^\circ\text{C}$), we recommend using partially or fully ducted recirculation configurations.