

# KSET900XE

Product family Hood

Hood Type Integrated (semi) hood

DesignTelescopicExtractionExtractionMaterialStainless steelType of steelBrushed

EAN code 8017709205379

Hood width 90 cm



### **Aesthetics**

AestheticUniversaleSerigraphy colourBlackColourStainless steelLogoSilk screen

Finishing Satin

**Controls** 

Control setting Slider

### **Technical Features**



No. of lights 2 No. of filters 2

Light typeLEDAnti-grease filtersAluminiumLight Power3 WVent outlet150 mmLight color temperature3500 °KMinimum distance from650 mm

scale (°K) GAS hob

Free outlet maximum 600 m³/h Minimum distance from 500 mm

capacity ELECTRIC hob

Motor power 175 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	240	44



Speed 2	368	54
Speed 3	581	65

### Performance / Energy Label


	A***
	Į.

**Annual Efficiency** 75 kWh/a Airbourne acouistical A- 44 dBA Consumption (AEChood) weighted sound Power **Emission at minimum** Energy efficieency class speed (SPEmin) (EEC) Airborne acoustical A-65 dBA Fluid Dynamic Efficiency 21 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency C speed (SPEmax) class (FDEC) Time increase factor (F) 1.2 Lighting Efficiency (LE) 76.1 lux/W **Energy Efficiency Index** 69.4 Lighting Efficiency Class A Measured air flow rate 352 m<sup>3</sup>/h (LEC) at best efficiency point **Grease Filtering** 76 % (Qbep) Efficiency (GFE) Measured air pressure 354 Pa **Grease Filtering** at best efficiency point Efficiency Class (GFEC) (Pbep) Air flow at minumum 240 m<sup>3</sup>/h Measured electric 165 W speed (Qmin) power input at best Air flow at maximum 581 m<sup>3</sup>/h efficiency point (Wbep) speed (Qmax) **Nominal Power** 4 W consumption of the light system (WL) Average illumination of 304 lux the light on the cooking surface (Emiddle) Sound power level at 65 dBA highest setting (Lwa)

#### **Electrical Connection**

Plug	Not present	Frequency (Hz)	50-60 Hz
Electrical connection rating	215 W	Power supply cable length	1500 mm
Voltage	220-240 V		



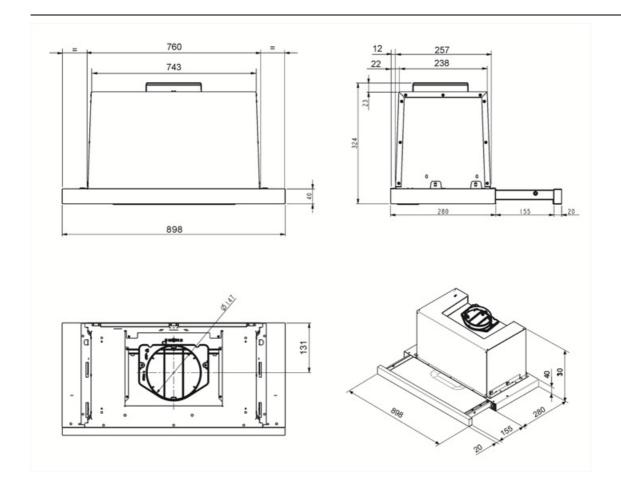



## Not included accessories

#### KITFC500



Round Charcoal filters (kit 2 pieces)



# Symbols glossary (TT)



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.